



SIGMA®
ENGINEERED SOLUTIONS



ELECTRICAL PRODUCTS—OEM

Sigma is a world leader in the manufacturing of precision metal and plastic products. We are the ideal partner for manufacturers and retailers, because we offer turnkey solutions starting from initial product design, in-house tooling, testing and agency approvals, final assembly, all the way up to customer specific packaging. In addition, through world class supply chain management, Sigma offers flexibility in delivering custom inventory and late point packaging programs to meet our customers' unique service objectives.

Market Sectors

Residential, Commercial & Industrial Electrical Construction: Sigma is a trusted manufacturer of a complete line of UL listed and CSA certified electrical fittings and hardware for the industrial, commercial, and residential construction industry. We have over 30 years experience manufacturing fittings in high-pressure die cast aluminum and zinc, sand cast copper alloys, ductile iron and gray iron, and steel products. We design and produce fittings for all standard conduit and cable systems including: Rigid Conduit, IMC, EMT, Flexible Metal Conduit, BX/MC/AC Cable, Liquid-Tight Conduit, Service Entrance Cable, Flexible Cord, and Non-Metallic Cable, as well as an extensive line of grounding products.

Sigma is also the industry leader in outdoor weatherproof products. The weatherproof product line is designed, tested, and UL approved to meet or exceed all applicable NEC requirements for wet and damp locations. The product line includes a range of die cast metal weatherproof boxes, covers, and lampholders.

Power Transmission & Distribution: The North American Power Transmission and Distribution industry relies on Sigma for its product needs. Power line hardware and transformer connectors are among the many different offerings, designed and manufactured in collaboration with customers. Products are made using a variety of processes, like sand casting, die casting and permanent mold casting.

Contract Manufacturing: Sigma offers end-to-end, cost effective, and innovative solutions to OEM customers worldwide with a focus on quality, cost, delivery, safety, and the environment. As a contract manufacturer, Sigma produces assemblies containing metal castings and injection molded components.

Capabilities

Sigma's engineering and manufacturing capabilities coupled with unsurpassed quality and supply chain logistics make Sigma truly a one-stop shop for customers' needs. We offer the lowest total cost of ownership for OEM's and retailers by combining the competitiveness of overseas manufacturing with the responsiveness and service of a US based company.

Supply Chain Logistics: Sigma has all the capabilities required to provide customers with a total supply chain solution. US based sales, customer service and supply chain management teams support our customers' planning staff to ensure appropriate inventory levels, on-time deliveries and high fill-rates. The Garner, NC headquarters utilizes a state of the art Warehouse Management System (WMS) to precisely track inventory throughout the supply chain. The sales process can be completed with Electronic Data Interchange (EDI) for order entry, invoicing, Advance Shipping Notice (ASN) and funds transfer. We have the ability to integrate Point of Sale (POS) data to offer Vendor Managed Inventory (VMI) programs.

In addition to service levels which meet or exceed most US manufacturers, Sigma offers best in class solutions to meet fluctuations in demand. Every plant follows lean manufacturing principles to drastically reduce production lead times and produce lot quantities that are synchronized with customer demand. All plants and the US warehouse operate under one Enterprise Resource Planning (ERP) system, which allows for complete and instantaneous visibility into orders and stocking levels and expedites reaction to demand fluctuations.

Sourcing: Sigma has global sourcing capability for procurement of raw material from world-class suppliers. Key strategic suppliers are backward integrated with lean principles to improve efficiency and eliminate waste. Extensive programs have been implemented with suppliers for vendor development, evaluation, processing and self certifications.

Design for Manufacturability: Sigma develops products tailored to a customer's specific requirement with quick turnaround, using Design for Lean Six Sigma (DLSS) methodology. Over 125 engineers are employed in the areas of product design, tool design, project management and manufacturing engineering. Designers use the latest CAD/CAM software which helps integrate product design, tool design, and tool manufacturing. Mold flow software helps predict mold flow before the die is actually built thereby reducing tool trials and modifications and shortening the development lead time.

Foundry Operations: Sigma maintains eight world-class foundries in India, offering a broad range of technology platforms – die casting, permanent mold casting, and sand casting. We are capable of producing numerous alloys of zinc, aluminum, copper, and iron. Sigma can also provide high precision stampings, extrusions and injection moldings at a competitive price.

Machining and Assembly: Sigma manufactures and assembles complex sub-assemblies using state-of-the-art CNC machines and in-house developed Special Purpose Machines (SPM). This gives us the ability to machine and assemble products with high reliability and repeatability.

Finishing Operations: We can provide a variety of finishes on our products depending upon the application or customer's requirements. These include zinc plating, tin plating, silver plating, powder coating, liquid painting and hot dip galvanizing. All finishing facilities are RoHS compliant. Sigma offers a wide range of packaging options for its retail and OEM customers. Current capabilities include blister packing, bagging, shrink wrapping, clamshells and cartons.

Quality: OEM customers look for reliability and responsiveness and Sigma meets and exceeds these expectations by having all plants rigorously conform to quality systems in accordance with ISO 9001. This includes having in-house certification laboratories to test and certify all products at all locations. All of our plants have the ability to perform certification tests under UL's Witness Test Data Program, thereby enabling faster product approvals.

*No overseas manufacturer can deliver better supply chain solutions in an unpredictable market. With our capabilities to design new products and control the entire manufacturing process from raw material to manufacturing to final packaging,
Sigma is the ideal partner to deliver new products in a competitive market.*

WORLDWIDE LOCATIONS



Headquarters,
Raleigh, NC, US



Aluminum Die Casting
& Steel Fittings, Pune, India



Zinc Die Casting,
Pune, India



Alum. Bronze Gravity Die Casting,
Pune, India



Iron & Non-ferrous Sand Casting,
Jaipur, India

CONDUIT FITTINGS



Table of Contents

Pages

EMT Fittings

| | |
|---|----|
| Zinc Set Screw Connectors and Coupling | 1 |
| Zinc Compression Connectors and Couplings | 2 |
| Zinc Rain Tight Compression Connectors and Couplings | 3 |
| Snap lock Compression Connectors and Couplings | 4 |
| Corner Elbows and EMT to Flex Combination Couplings | 5 |
| Combination Couplings and 90° EMT Elbows..... | 6 |
| 90° Compression Connectors and 90° Set Screw Connectors | 7 |
| Offset Connectors | 8 |
| Zinc Set Screw Pull Elbows | 9 |
| EMT Straps | 10 |
| Aluminum Set Screw Conduit Bodies | 11 |

Rigid Fittings

| | |
|--|----|
| Aluminum Rigid and Combination Conduit Bodies | 14 |
| Service Entrance Elbows and Aluminum Rigid Conduit Bodies - Canadian Style | 19 |
| Aluminum Mogul Conduit Bodies | 20 |
| Ductile Iron Rigid Conduit Bodies | 21 |
| Conduit Body Covers | 23 |
| Conduit Body Gaskets | 24 |
| Conduit Bushings | 25 |
| Grounding Bushings - Without Lug | 26 |
| Grounding Bushings - Lay-in Lug | 27 |
| Grounding Bushings - Feed-thru Lug | 28 |
| Grounding Bushings - Copper Lay-in Lug | 29 |
| 90° Rigid and Combination Pull Elbows | 30 |
| Water Tight Hubs | 31 |
| Conduit Nipples | 32 |
| Three Piece Couplings and Floor Flange | 33 |
| Offset Nipples and Rigid Box Spacers | 34 |
| Die-Cast Locknuts and Reducer Bushings | 35 |
| Set Screw Connectors, Concrete Slab and 90° Short Radius Elbows | 36 |
| Clamp Backs and One Hole Straps..... | 37 |
| Steel Straps | 38 |
| Plastic Bushings and Steel Locknuts | 39 |
| Reducing Washer and Rigid Threaded Coupling | 40 |

CONDUIT FITTINGS



Table of Contents

Pages

NM SE Fittings

| | |
|---|----|
| Clamp Type Connectors | 41 |
| Service Entrance Heads - Clamp-on Type and Cable Heads | 42 |
| Service Entrance Heads - Threaded Type | 43 |
| Service Entrance Heads - Set Screw Type and Mast Type | 44 |
| Insulators for Service Entrance Heads and Conduit Sill Plates | 45 |
| Water-tight and UF Cable Connectors | 46 |

BX Fittings

| | |
|---|----|
| Straight and Angled Squeeze Connectors | 47 |
| Screw-In Connectors and Couplings | 48 |
| Set Screw Connector and Combination Connector..... | 49 |
| BX Connectors and One Hole Strap and Anti Short Bushing | 50 |
| Saddle Connectors and Duplex Connector | 51 |
| Strap Squeeze Connector and Snap Lock Connector | 52 |
| Combination Couplings and Double Snap Cut-in Connectors | 53 |

Liquid-Tight Fittings

| | |
|--|----|
| Zinc Liquid-Tight Connectors | 54 |
| Plastic Liquid-Tight Connectors | 55 |
| Iron Liquid-Tight Connectors | 56 |
| Iron Liquid-Tight Grounding Connectors | 57 |

Grounding Fittings

| | |
|---|----|
| Ground Rod Clamps | 58 |
| Combination Ground Clamps for Bare Wire | 59 |
| Ground Clamps for Bare Wire | 60 |
| Ground Clamps for Armored Wire | 62 |
| Ground Clamps for Rigid Conduit | 63 |
| Swivel Hub | 65 |
| Conduit Hubs and Jumper Clamps | 66 |
| Tank Ground Connectors | 67 |
| Intersystem Bonding Bridge | 68 |
| Grounding Lugs | 69 |

CONDUIT FITTINGS



Table of Contents

Pages

Clamps and Hangers

| | |
|--|----|
| Conduit Hangers and Conduit Supports | 70 |
| Beam Clamps and J Clamps | 71 |

Accessories

| | |
|----------------------------------|----|
| Knockout Seal & Nail Plate | 72 |
|----------------------------------|----|

STRAIN RELIEF



Table of Contents

Pages

Wire Mesh Strain Relief Connectors

| | |
|---|----|
| Cord Grip Connectors and Box Connectors | 73 |
| Cord Grip Non-Metallic Connector | 74 |
| Cord Grip Metallic Connector | 77 |
| Water Tight Connector | 80 |

WEATHERPROOF PRODUCTS



Table of Contents

Pages

Metallic Weatherproof

| | |
|---|-----|
| One Gang Boxes | 81 |
| Two Gang Boxes | 82 |
| Three Gang Boxes and Round Boxes | 83 |
| Extension Rings | 84 |
| One Gang Device Covers | 85 |
| Two and Three Gang Device Covers | 86 |
| Rectangular Blank Covers | 87 |
| Three Gang and Round Blank Covers | 88 |
| Lamp Holder Covers | 89 |
| Flip Cover Kits | 90 |
| WIU Covers | 95 |
| WIU Kit | 96 |
| Lamp Holders | 97 |
| Lighting Kits | 98 |
| LED Lights and Spike Lights | 104 |
| LED Light Kits | 105 |
| Garden Lights | 106 |
| Vaportight Fixtures | 107 |
| Vaportight Components and Accessories | 109 |
| Accessories | 110 |

Non-Metallic Weatherproof

| | |
|---|-----|
| One and Two Gang Non-Metallic Outlet Box | 111 |
| Round Non-Metallic Outlet Box | 112 |
| One and Two Gang Non-Metallic Flip Covers | 113 |
| Two Gang Multi Use Non-Metallic Flip Covers | 114 |
| Non-Metallic Blank Covers | 115 |
| Non-Metallic Lamp Holder Covers | 116 |
| Non-Metallic Lamp Holder | 117 |
| Slimline WIU Covers | 118 |
| Motion Sensor | 121 |

Zinc Set Screw Connectors

Application

Used to connect EMT to steel outlet box or other metal enclosure

- Approved for use in concrete-tight locations
- Sizes 2-1/2", 3", 3-1/2" and 4" approved for use with EMT / Rigid / IMC
- Assembled with die-cast zinc locknut
- Die-cast from high strength zinc alloy
- Available with or without 90° C rated insulator

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E210498

 LR57925

| ZINC SET SCREW CONNECTORS | | |
|---------------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| SCON050 | 50I | 1/2" |
| SCON075 | 75I | 3/4" |
| SCON100 | 100I | 1" |
| SCON125 | 125I | 1-1/4" |
| SCON150 | 150I | 1-1/2" |
| SCON200 | 200I | 2" |
| SCON250 | 250I | 2-1/2" |
| SCON300 | 300I | 3" |
| SCON350 | 350I | 3-1/2" |
| SCON400 | 400I | 4" |

*- Product with "I" suffix includes purple insulator



Without Insulator

With Insulator

Zinc Set Screw Couplings

Application

Used to connect two lengths of EMT

- Assembled with tri-combo screws
- Sizes 2-1/2", 3", 3-1/2" and 4" approved for use with EMT / Rigid / IMC
- Approved for use in concrete-tight locations, when taped
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E210498

 LR57925

| ZINC SET SCREW COUPLINGS | |
|--------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| SCOP050 | 1/2" |
| SCOP075 | 3/4" |
| SCOP100 | 1" |
| SCOP125 | 1-1/4" |
| SCOP150 | 1-1/2" |
| SCOP200 | 2" |
| SCOP250 | 2-1/2" |
| SCOP300 | 3" |
| SCOP350 | 3-1/2" |
| SCOP400 | 4" |



Zinc Compression Connectors

Application

Used to connect EMT to steel outlet box or other metal enclosure

- Approved for use in concrete-tight locations
- Sizes 2-1/2", 3", 3-1/2" and 4" approved for use with EMT / Rigid / IMC
- Assembled with die-cast zinc locknut
- Available with or without 90° C rated insulator
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E210498

 LR57925

ZINC COMPRESSION CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| CCON050 | 1/2" |
| CCON075 | 3/4" |
| CCON100 | 1" |
| CCON125 | 1-1/4" |
| CCON150 | 1-1/2" |
| CCON200 | 2" |
| CCON250 | 2-1/2" |
| CCON300 | 3" |
| CCON350 | 3-1/2" |
| CCON400 | 4" |

*- Product with "I" suffix includes purple insulator



Without Insulator



With Insulator

Zinc Compression Couplings

Application

Used to connect two lengths of EMT.

- Approved for use in concrete-tight locations
- Sizes 2-1/2", 3", 3-1/2" and 4" approved for use with EMT / Rigid / IMC
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E210498

 LR57925

ZINC COMPRESSION COUPLINGS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| CCOP050 | 1/2" |
| CCOP075 | 3/4" |
| CCOP100 | 1" |
| CCOP125 | 1-1/4" |
| CCOP150 | 1-1/2" |
| CCOP200 | 2" |
| CCOP250 | 2-1/2" |
| CCOP300 | 3" |
| CCOP350 | 3-1/2" |
| CCOP400 | 4" |



Zinc Rain Tight Compression Connectors

Application

Used to connect EMT to steel outlet box or other metal enclosure

- Approved for use in rain-tight and concrete-tight locations
- Assembled with die-cast zinc locknut
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| ZINC RAIN TIGHT CONNECTORS | |
|----------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CCON050RT | 1/2" |
| CCON075RT | 3/4" |
| CCON100RT | 1" |



Zinc Rain Tight Compression Couplings

Application


Used to connect two lengths of EMT

- Approved for use in rain-tight and concrete-tight locations
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| ZINC RAIN TIGHT COUPLINGS | |
|---------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CCOP050RT | 1/2" |
| CCOP075RT | 3/4" |
| CCOP100RT | 1" |



Snap Lock® Compression Connectors

Application

Snap Lock® compression type connectors are used to secure and terminate steel EMT conduit to a knockout in a metal box or enclosure without the use of tools.

The patent pending Snap Lock® design provides a faster installation.

- Conduit Snaps into Connector
- Concrete-Tight
- Rain-Tight
- Approved for use in wet locations
- Die-cast from high strength zinc alloy

SNAP LOCK® COMPRESSION CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| ECON050 | 1/2" |
| ECON075 | 3/4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



Snap Lock® Compression Couplings

Application

Snap Lock® compression type couplings are used to join lengths of steel EMT conduit without the use of tools.

The patent pending Snap Lock® design provides a faster installation

- Conduit Snaps into Coupling
- Concrete-Tight
- Rain-Tight
- Approved for use in wet locations
- Die-cast from high strength zinc alloy

SNAP LOCK® COMPRESSION COUPLINGS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| ECOP050 | 1/2" |
| ECOP075 | 3/4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



Corner Elbows

Application

Used to connect two lengths of EMT on a 90° inside corner

- Removable cover facilitates wire pulling
- Useful while making tight turns in limited space
- Assembled with tri-combo screws
- Die-cast from high strength zinc alloy

| CORNER ELBOWS | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CE050 | 1/2" |
| CE075 | 3/4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

LR57925

EMT to Flex Combination Couplings

Application

Used to provide transition from EMT to flexible metal conduit

- Compression to screw-in type
- Die-cast from high strength zinc alloy

| EMT TO FLEX COMBINATION COUPLINGS | |
|-----------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CSICP050 | 1/2" |
| CSICP075 | 3/4" |
| CSICP100 | 1" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

LR57925

Combination Couplings

Application

Used to connect EMT to flexible metal conduit or NM cable.

- Assembled with tri-combo screws
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E210498

 LR57925

| COMBINATION COUPLINGS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CMB037SS | 3/8" |
| CMB050SS | 1/2" |
| CMB075SS | 3/4" |



EMT to NM



EMT to Flex

90° EMT Connectors

Application

Used to connect EMT to a steel outlet box or enclosure where short radius or bend is desired

- Approved for use in concrete-tight locations
- Assembled with die-cast locknut
- Die-cast from high strength zinc alloy

| 90° COMPRESSION CONNECTORS | |
|----------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ACCN050 | 1/2" |
| ACCN075 | 3/4" |
| ACCN100 | 1" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

LR57925

90° Set Screw Connectors

Application

Used to connect EMT to a steel outlet box or enclosure where short radius or bend is desired

- Approved for use in concrete-tight locations
- Assembled with die-cast locknut
- Die-cast from high strength zinc alloy

| 90° SET SCREW CONNECTORS | |
|--------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ASCN050 | 1/2" |
| ASCN075 | 3/4" |

*- Not UL approved



Offset Set Screw Connectors

Application

Use to connect EMT to metal outlet box or enclosure where an offset is desired

- Approved for use in concrete-tight locations when taped
- Assembled with tri-combo screws and die-cast locknut
- Die-cast from high strength zinc alloy

| OFFSET SET SCREW CONNECTORS | |
|-----------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| OCS050 | 1/2" |
| OCS075 | 3/4" |
| OCS100 | 1" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E210498

LR57925

Offset Compression Connectors

Application

Use to connect EMT to metal outlet box or enclosure where an offset is desired

- Approved for use in concrete-tight locations when taped
- Assembled with die-cast locknut
- Die-cast from high strength zinc alloy

| OFFSET COMPRESSION CONNECTORS | |
|-------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| OCC050 | 1/2" |
| OCC075 | 3/4" |
| OCC100 | 1" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E210498

LR57925

Set Screw Pull Elbows

Application

Used to make a 90° connection of two runs of steel EMT conduit

- Removable aluminum cover permits access for wire pulling
- Furnished with or without rubber gasket
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| PULL ELBOWS - EMT TO EMT | | |
|--------------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| PE050EE | PE050EEG | 1/2" |
| PE075EE | PE075EEG | 3/4" |
| PE100EE | PE100EEG | 1" |
| PE125EE | PE125EEG | 1-1/4" |

*- Product with "G" suffix includes gasket



Combination Pull Elbows

Application

Used to make a 90° connection of two runs of IMC, Rigid or steel EMT conduit

- Removable aluminum cover permits access for wire pulling
- Furnished with rubber gasket
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| PULL ELBOWS - COMBINATION TO COMBINATION | | |
|--|------------|--|
| CATALOG NUMBER | TRADE SIZE | |
| PE050CCG | 1/2" | |
| PE075CCG | 3/4" | |
| PE100CCG | 1" | |
| PE125CCG | 1-1/4" | |



EMT to Box Pull Elbows

Application

Used to make a 90° connection of Steel EMT conduit to a metal box or enclosure

- Removable aluminum cover permits access for wire pulling
- Furnished with or without rubber gasket
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| PULL ELBOWS - EMT TO BOX | | |
|--------------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| PE050EB | PE050EBG | 1/2" |
| PE075EB | PE075EBG | 3/4" |
| PE100EB | PE100EBG | 1" |
| PE125EB | PE125EBG | 1-1/4" |

*- Product with "G" suffix includes gasket



EMT One Hole Straps

Application

Used to support EMT where greater load bearing is required

- Snap-on style enables easy installation
- Approved for indoor and outdoor use
- Made of stamped steel with zinc plating

| EMT ONE HOLE STRAPS | |
|---------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ES0501 | 1/2" |
| ES0751 | 3/4" |
| ES1001 | 1" |
| ES1251 | 1-1/4" |
| ES1501 | 1-1/2" |
| ES2001 | 2" |



Standards

- UL 2239
- CSA C22.2 No. 18.4-15

Certifications

 E229278

EMT Two Hole Straps

Application

Used to support EMT where greater load bearing is required

- Snap-on style enables easy installation
- Approved for indoor and outdoor use
- Made of stamped steel with zinc plating

| EMT TWO HOLE STRAPS | |
|---------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ES0502 | 1/2" |
| ES0752 | 3/4" |
| ES1002 | 1" |
| ES1252 | 1-1/4" |
| ES1502 | 1-1/2" |
| ES2002 | 2" |



Standards

- UL 2239
- CSA C22.2 No. 18.4-15

Certifications

 E229278

Aluminum Set Screw Conduit Bodies

Application


Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Set screw hubs to accommodate EMT
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



E121488



LR57925



No Gasket or Cover



AN Models



CG Models

Aluminum Set Screw Conduit Bodies

Application

Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Set screw hubs to accommodate EMT
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



E121488



LR57925

| ALUMINUM C TYPE CONDUIT BODIES | | | | |
|--------------------------------|-----------|-----------|------------|--------------------------|
| CATALOG NUMBER | | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE |
| | | | | INTERNAL VOLUME (in3) |
| LCSS050 | LCSS050AN | LCSS050CG | 1/2" | - |
| LCSS075 | LCSS075AN | LCSS075CG | 3/4" | #6 AWG |
| LCSS100 | LCSS100AN | LCSS100CG | 1" | #4 AWG |
| LCSS125 | LCSS125AN | LCSS125CG | 1-1/4" | #2 AWG |
| LCSS150 | LCSS150AN | LCSS150CG | 1-1/2" | #1/0 AWG |
| LCSS200 | LCSS200AN | LCSS200CG | 2" | #2/0 AWG |
| LCSS250 | LCSS250AN | | 2-1/2" | 250 MCM |
| LCSS300 | LCSS300AN | | 3" | 250 MCM |
| LCSS350 | LCSS350AN | | 3-1/2" | 300 MCM |
| LCSS400 | LCSS400AN | | 4" | 300 MCM |

*- Product with "AN" suffix includes rubber gasket & stamped cover

*- Product with "CG" suffix includes fiber gasket & die-cast cover



No Gasket or Cover



AN Models



CG Models

Aluminum Set Screw Conduit Bodies

Application

Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Set screw hubs to accommodate EMT
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



E121488



LR57925



No Gasket or Cover

AN Models

CG Models

Aluminum Set Screw Conduit Bodies

Application


Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Set screw hubs to accommodate EMT
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



E121488



LR57925



No Gasket or Cover

AN Models

CG Models

Aluminum Set Screw Conduit Bodies

Application


Used with EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Set screw hubs to accommodate EMT
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



| ALUMINUM LT TYPE CONDUIT BODIES | | | | | |
|---------------------------------|-----------|-----------|------------|--------------------------|-----------------------|
| CATALOG NUMBER | | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in3) |
| LTSS050 | LTSS050AN | LTSS050CG | 1/2" | - | 4.35 |
| LTSS075 | LTSS075AN | LTSS075CG | 3/4" | #6 AWG | 7.3 |
| LTSS100 | LTSS100AN | LTSS100CG | 1" | #4 AWG | 12.2 |
| LTSS125 | LTSS125AN | LTSS125CG | 1-1/4" | #2 AWG | 33.1 |
| LTSS150 | LTSS150AN | LTSS150CG | 1-1/2" | #2 AWG | 33.1 |
| LTSS200 | LTSS200AN | LTSS200CG | 2" | #1 AWG | 67.0 |
| LTSS250 | LTSS250AN | | 2-1/2" | #3/0 AWG | 149.00 |
| LTSS300 | LTSS300AN | | 3" | #3/0 AWG | 175.0 |
| LTSS350 | LTSS350AN | | 3-1/2" | #4/0 AWG | 298.0 |
| LTSS400 | LTSS400AN | | 4" | #4/0 AWG | 300.0 |

*- Product with "AN" suffix includes rubber gasket & stamped cover

*- Product with "CG" suffix includes fiber gasket & die-cast cover



No Gasket or Cover



AN Models



CG Models

Aluminum Rigid Conduit Bodies

Application


Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications



E121488



No Gasket or Cover

AN Models

CG Models

Aluminum Combination Conduit Bodies

Application


Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications



E121488

| ALUMINUM LB TYPE COMBINATION CONDUIT BODIES | | | | |
|---|----------|------------|--------------------------|-----------------------|
| CATALOG NUMBER | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in³) |
| LBC050 | LBC050AN | 1/2" | - | 4.35 |
| LBC075 | LBC075AN | 3/4" | - | 7.3 |
| LBC100 | LBC100AN | 1" | - | 12.2 |
| LBC125 | LBC125AN | 1-1/4" | - | 32.3 |
| LBC150 | LBC150AN | 1-1/2" | - | 33.8 |
| LBC200 | LBC200AN | 2" | - | 71.2 |

*- Product with "AN" suffix includes rubber gasket & stamped cover



No Gasket or Cover

AN Models

Aluminum Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

 E121488



No Gasket or Cover

 LR57925

ALUMINUM C TYPE CONDUIT BODIES

| CATALOG NUMBER | | | TRADE SIZE | MAX 3-CONDUCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
|----------------|---------|---------|------------|---------------------------|------------------------------------|
| LC050 | LC050AN | LC050CG | 1/2" | - | 4.35 |
| LC075 | LC075AN | LC075CG | 3/4" | #6 AWG | 7.3 |
| LC100 | LC100AN | LC100CG | 1" | #4 AWG | 12.2 |
| LC125 | LC125AN | LC125CG | 1-1/4" | #2 AWG | 33.4 |
| LC150 | LC150AN | LC150CG | 1-1/2" | #1/0 AWG | 33.5 |
| LC200 | LC200AN | LC200CG | 2" | #2/0 AWG | 69.5 |
| LC250 | LC250AN | | 2-1/2" | 250 MCM | 159.0 |
| LC300 | LC300AN | | 3" | 250 MCM | 188.0 |
| LC350 | LC350AN | | 3-1/2" | 300 MCM | 307.0 |
| LC400 | LC400AN | | 4" | 300 MCM | 309.0 |

*- Product with "AN" suffix includes rubber gasket & stamped cover

*- Product with "CG" suffix includes fiber gasket & die-cast cover



AN Models



CG Models

Aluminum Combination Conduit Bodies

Application

Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

 E121488

| ALUMINUM LC TYPE COMBINATION CONDUIT BODIES | | | |
|---|----------|------------|---------------------------|
| CATALOG NUMBER | | TRADE SIZE | MAX 3-CONDUCTOR WIRE SIZE |
| LCC050 | LCC050AN | 1/2" | - |
| LCC075 | LCC075AN | 3/4" | #6 AWG |
| LCC100 | LCC100AN | 1" | #4 AWG |
| LCC125 | LCC125AN | 1-1/4" | #2 AWG |
| LCC150 | LCC150AN | 1-1/2" | #1/0 AWG |
| LCC200 | LCC200AN | 2" | #2/0 AWG |

*- Product with AN suffix includes rubber gasket & stamped cover

*- Product with CG suffix includes fiber gasket & die-cast cover



No Gasket or Cover



AN Models

Aluminum Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

| ALUMINUM LL TYPE CONDUIT BODIES | | | | |
|---------------------------------|---------|---------|------------|--------------------------|
| CATALOG NUMBER | | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE |
| | | | | INTERNAL VOLUME (in³) |
| LL050 | LL050AN | LL050CG | 1/2" | - |
| LL075 | LL075AN | LL075CG | 3/4" | #6 AWG |
| LL100 | LL100AN | LL100CG | 1" | #4 AWG |
| LL125 | LL125AN | LL125CG | 1-1/4" | #2 AWG |
| LL150 | LL150AN | LL150CG | 1-1/2" | #1/0 AWG |
| LL200 | LL200AN | LL200CG | 2" | #4/0 AWG |
| LL250 | LL250AN | | 2-1/2" | 300 MCM |
| LL300 | LL300AN | | 3" | 350 MCM |
| LL350 | LL350AN | | 3-1/2" | 350 MCM |
| LL400 | LL400AN | | 4" | 350 MCM |

*- Product with AN suffix includes rubber gasket & stamped cover

**- Product with CG suffix includes fiber gasket & die-cast cover



No Gasket or Cover



AN Models



CG Models

Certifications

E121488

LR57925

Aluminum Combination Conduit Bodies

Application

Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

| ALUMINUM LL TYPE COMBINATION CONDUIT BODIES | | | | |
|---|----------|----------|------------|--------------------------|
| CATALOG NUMBER | | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE |
| | | | | INTERNAL VOLUME (in³) |
| LLC050 | LLC050AN | LLC050CG | 1/2" | - |
| LLC075 | LLC075AN | LLC075CG | 3/4" | #6 AWG |
| LLC100 | LLC100AN | LLC100CG | 1" | #4 AWG |
| LLC125 | LLC125AN | LLC125CG | 1-1/4" | #2 AWG |
| LLC150 | LLC150AN | LLC150CG | 1-1/2" | #1/0 AWG |
| LLC200 | LLC200AN | LLC200CG | 2" | #4/0 AWG |

**- Product with AN suffix includes rubber gasket & stamped cover



No Gasket or Cover



AN Models

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

E121488

LR57925

Aluminum Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications



E121488



No Gasket or Cover



AN Models



CG Models

Aluminum Combination Conduit Bodies

Application


Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications



E121488

ALUMINUM LR TYPE COMBINATION CONDUIT BODIES

| CATALOG NUMBER | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in³) |
|----------------|----------|------------|--------------------------|-----------------------|
| LRC050 | LRC050AN | 1/2" | - | 4.35 |
| LRC075 | LRC075AN | 3/4" | #6 AWG | 7.3 |
| LRC100 | LRC100AN | 1" | #4 AWG | 12.2 |
| LRC125 | LRC125AN | 1-1/4" | #2 AWG | 35.8 |
| LRC150 | LRC150AN | 1-1/2" | #1/0 AWG | 35.1 |
| LRC200 | LRC200AN | 2" | #4/0 AWG | 69.7 |

** Product with AN suffix includes rubber gasket & stamped cover



No Gasket or Cover



AN Models

Aluminum Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & CSA C22.2 No. 18.3-12

Certifications

 E121488

 LR57925



| ALUMINUM LT TYPE CONDUIT BODIES | | | | |
|---------------------------------|---------|------------|--------------------------|-----------------------|
| CATALOG NUMBER | | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in³) |
| LT050 | LT050AN | 1/2" | - | 4.35 |
| LT075 | LT075AN | 3/4" | #6 AWG | 7.3 |
| LT100 | LT100AN | 1" | #4 AWG | 12.2 |
| LT125 | LT125AN | 1-1/4" | #2 AWG | 33.1 |
| LT150 | LT150AN | 1-1/2" | #2 AWG | 33.1 |
| LT200 | LT200AN | 2" | #1 AWG | 67.0 |
| LT250 | LT250AN | 2-1/2" | #3/0 AWG | 149.00 |
| LT300 | LT300AN | 3" | #3/0 AWG | 175.0 |
| LT350 | LT350AN | 3-1/2" | #4/0 AWG | 298.0 |
| LT400 | LT400AN | 4" | #4/0 AWG | 300.0 |

*- Product with "AN" suffix includes rubber gasket & stamped cover

*- Product with "CG" suffix includes fiber gasket & die-cast cover

Aluminum Combination Conduit Bodies

Application

Used with threaded rigid conduit, IMC or EMT for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

 E121488

 LR57925

| ALUMINUM LT TYPE COMBINATION CONDUIT BODIES | | | |
|---|------------|--------------------------|-----------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in³) |
| LTC050 | LTC050AN | 1/2" | - |
| LTC075 | LTC075AN | 3/4" | #6 AWG |
| LTC100 | LTC100AN | 1" | #4 AWG |
| LTC125 | LTC125AN | 1-1/4" | #2 AWG |
| LTC150 | LTC150AN | 1-1/2" | #2 AWG |
| LTC200 | LTC200AN | 2" | #1 AWG |

-- Product with AN suffix includes rubber gasket & stamped cover



Aluminum Service Entrance Elbows

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection and maintenance

- Assembled with fiber gasket and aluminum die cast cover
- UL listed for wet location use
- Die cast from high strength, corrosion and weather resistant aluminum alloy

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

 E121488

 LR57925

| ALUMINUM LB TYPE CONDUIT BODIES | | | | |
|---------------------------------|------------|--------------------------|------------------------------------|------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) | |
| SLB050 | SLB050CN | 1/2" | - | 1.8 |
| SLB075 | SLB075CN | 3/4" | - | 3.8 |
| SLB100 | SLB100CN | 1" | - | 5.7 |
| SLB125 | | 1-1/4" | - | 13.5 |
| SLB150 | | 1-1/2" | - | 17.0 |
| SLB200 | | 2" | - | 29.3 |
| SLBXL125 | | 1-1/4" | - | 24.3 |
| SLBXL200 | | 2" | - | 63.0 |

*- Product with CN suffix includes rubber gasket

*- Product with XL are extra long designs



Standard



Extra Long

Aluminum Rigid Conduit Bodies - Canadian Style

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Combination conduit bodies also accommodate EMT applications
- Assembled with slotted / Robertson combination screws
- Assembled with rubber gasket and stamped cover
- Cast from high strength corrosion and weather resistant aluminum alloy

Standards

- CSA C22.2 No. 18.1-13 & C22.2 No. 18.3-12

Certifications

 LR57925

| CANADIAN LB TYPE CONDUIT BODIES | |
|---------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CLB050AN | 1/2" |
| CLB075AN | 3/4" |
| CLB100AN | 1" |
| CLB125AN | 1-1/4" |
| CLB150AN | 1-1/2" |
| CLB200AN | 2" |

| CANADIAN LB TYPE CONDUIT BODIES | |
|---------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CLBC050AN | 1/2" |
| CLBC075AN | 3/4" |
| CLBC100AN | 1" |
| CLBC125AN | 1-1/4" |
| CLBC150AN | 1-1/2" |
| CLBC200AN | 2" |

*- Product with AN suffix includes rubber gasket & stamped cover



Aluminum Mogul Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing conductors that are stiff due to large size or type of insulation. Mogul bodies provide longer openings to prevent sharp bends and kinks during installation.

- Longer body facilitates pulling of larger conductors
- Cast covers provide additional wiring area
- Cast from high strength corrosion and weather resistant aluminum alloy
- Pre-assembled with fiber gasket

Standards

- UL 514B
- CSA 22.2 No. 18

Certifications

-  E121488
-  LR57925

| ALUMINUM LB TYPE CONDUIT BODIES | | |
|---------------------------------|------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | INTERNAL VOLUME (in ³) |
| LBM0125CG | 1-1/4" | 40 |
| LBM0150CG | 1-1/2" | 128 |
| LBM0200CG | 2" | 128 |



Ductile Iron Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- NPT threaded hubs
- Cast from high strength ductile iron and zinc plated

Standards

- UL 514B
- CSA 22.2 No. 18

Certifications

 E121488
LISTED

 LR57925

| IRON LB TYPE CONDUIT BODIES | | | |
|-----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLB050 | 1/2" | - | 4.5 |
| MLB075 | 3/4" | #6 | 7.5 |
| MLB100 | 1" | #4 | 12.5 |
| MLB125 | 1-1/4" | #2 | 32.3 |
| MLB150 | 1-1/2" | #1/0 | 35.3 |
| MLB200 | 2" | #4/0 | 73 |
| MLB250 | 2-1/2" | 300MCM | 138 |
| MLB300 | 3" | 350MCM | 170 |
| MLB350 | 3-1/2" | 500MCM | 300 |
| MLB400 | 4" | 500MCM | 328 |



| IRON LL TYPE CONDUIT BODIES | | | |
|-----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLL050 | 1/2" | - | 4.5 |
| MLL075 | 3/4" | #6 | 7.5 |
| MLL100 | 1" | #4 | 12.5 |
| MLL125 | 1-1/4" | #2 | 32.3 |
| MLL150 | 1-1/2" | #1/0 | 35.3 |
| MLL200 | 2" | #4/0 | 73 |
| MLL250 | 2-1/2" | 300MCM | 138 |
| MLL300 | 3" | 350MCM | 170 |
| MLL350 | 3-1/2" | 350MCM | 300 |
| MLL400 | 4" | 350MCM | 328 |



| IRON LR TYPE CONDUIT BODIES | | | |
|-----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLR050 | 1/2" | - | 4.5 |
| MLR075 | 3/4" | #6 | 7.5 |
| MLR100 | 1" | #4 | 12.5 |
| MLR125 | 1-1/4" | #2 | 32.3 |
| MLR150 | 1-1/2" | #1/0 | 35.3 |
| MLR200 | 2" | #4/0 | 73 |
| MLR250 | 2-1/2" | 300MCM | 138 |
| MLR300 | 3" | 350MCM | 170 |
| MLR350 | 3-1/2" | 350MCM | 300 |
| MLR400 | 4" | 350MCM | 328 |



Ductile Iron Rigid Conduit Bodies

Application

Used with threaded rigid conduit or IMC for providing access to the interior of a conduit system for pulling, splicing, inspection, and maintenance

- Flat back design for easy mounting close to walls
- NPT threaded hubs
- Cast from high strength ductile iron and zinc plated

Standards

- UL 514B
- CSA 22.2 No. 18

Certifications

 E121488
LISTED

 LR57925

| IRON X TYPE CONDUIT BODIES | | | |
|----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLX050 | 1/2" | - | 5.6 |
| MLX075 | 3/4" | #6 | 9.5 |
| MLX100 | 1" | #4 | 15 |
| MLX125 | 1-1/4" | #2 | 33 |
| MLX150 | 1-1/2" | #1 | 36 |
| MLX200 | 2" | #2/0 | 75 |



| IRON T TYPE CONDUIT BODIES | | | |
|----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLT050 | 1/2" | - | 6 |
| MLT075 | 3/4" | #6 | 9.5 |
| MLT100 | 1" | #4 | 15 |
| MLT125 | 1-1/4" | #2 | 33 |
| MLT150 | 1-1/2" | #1 | 36 |
| MLT200 | 2" | #2/0 | 75 |
| MLT250 | 2-1/2" | #4/0 | 138 |
| MLT300 | 3" | #4/0 | 170 |
| MLT350 | 3-1/2" | 350MCM | 300 |
| MLT400 | 4" | 350MCM | 328 |



| IRON C TYPE CONDUIT BODIES | | | |
|----------------------------|------------|--------------------------|------------------------------------|
| CATALOG NUMBER | TRADE SIZE | MAX 3-CONDCTOR WIRE SIZE | INTERNAL VOLUME (in ³) |
| MLC050 | 1/2" | - | 4.5 |
| MLC075 | 3/4" | #6 | 7.5 |
| MLC100 | 1" | #4 | 12.5 |
| MLC125 | 1-1/4" | #2 | 32.3 |
| MLC150 | 1-1/2" | #1/0 | 35.3 |
| MLC200 | 2" | #3/0 | 73 |
| MLC250 | 2-1/2" | 250MCM | 138 |
| MLC300 | 3" | 250MCM | 170 |
| MLC350 | 3-1/2" | 350MCM | 300 |
| MLC400 | 4" | 350MCM | 328 |



Conduit Body Covers

Application

Used in conjunction with gaskets when assembling conduit bodies to cover openings

- Stamped and die-cast aluminum covers used with aluminum conduit bodies
- Stamped steel covers used with iron conduit bodies
- Cast covers used with ductile iron conduit bodies
- Includes captive zinc plated, steel mounting screws
- Stamped and die-cast from aluminum alloy or stamped from zinc plated steel or sand cast from ductile iron

Standards

- UL 514A & 514B
- CSA C22.2 No. 18.1-13 &
CSA C22.2 No. 18.3-12

Certifications

E121488



LR57925



STAMPED ALUMINUM COVERS

| CATALOG NUMBER | TRADE SIZE |
|----------------|-----------------|
| ASC050 | 1/2" |
| ASC075 | 3/4" |
| ASC100 | 1" |
| ASC150 | 1-1/4" & 1-1/2" |
| ASC200 | 2" |
| ASC300 | 2-1/2" & 3" |
| ASC400 | 3-1/2" & 4" |

*- Product with u suffix W/O screws



DIE CAST ALUMINUM COVERS

| CATALOG NUMBER | TRADE SIZE |
|----------------|-----------------|
| ADC050 | 1/2" |
| ADC075 | 3/4" |
| ADC100 | 1" |
| ADC150 | 1-1/4" & 1-1/2" |
| ADC200 | 2" |
| ADC300 | 2-1/2" & 3" |
| ADC400 | 3-1/2" & 4" |

*- Product with u suffix W/O screws



| DUCTILE IRON COVERS | |
|---------------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| CC050 | 1/2" |
| CC075 | 3/4" |
| CC100 | 1" |
| CC150 | 1-1/4" & 1-1/2" |
| CC200 | 2" |
| CC300 | 2-1/2" & 3" |
| CC400 | 3-1/2" & 4" |



| STAMPED STEEL COVERS | |
|----------------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| SSC050 | 1/2" |
| SSC075 | 3/4" |
| SSC100 | 1" |
| SSC150 | 1-1/4" & 1-1/2" |
| SSC200 | 2" |
| SSC300 | 2-1/2" & 3" |
| SSC400 | 3-1/2" & 4" |



Conduit Body Gaskets

Application

Used with aluminum conduit bodies to seal enclosure with covers

- Available in fiber and rubber
- Form 5 rubber gaskets used with Form 5 conduit bodies to seal enclosure
- Form 5 can be converted to open type gaskets by tearing out center section along scored line

| RUBBER GASKETS | |
|----------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| NG050 | 1/2" |
| NG075 | 3/4" |
| NG100 | 1" |
| NG150 | 1-1/4" & 1-1/2" |
| NG200 | 2" |
| NG300 | 2-1/2"& 3" |
| NG400 | 3-1/2"& 4" |



| FIBER GASKETS | |
|----------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| FG050 | 1/2" |
| FG075 | 3/4" |
| FG100 | 1" |
| FG150 | 1-1/4" & 1-1/2" |
| FG200 | 2" |
| FG300 | 2-1/2"& 3" |
| FG400 | 3-1/2"& 4" |



| FORM 5 RUBBER GASKETS | |
|-----------------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| NGT050 | 1/2" |
| NGT075 | 3/4" |
| NGT100 | 1" |
| NGT150 | 1-1/4" & 1-1/2" |
| NGT200 | 2" |
| NGT300 | 2-1/2" & 3" |
| NGT400 | 3-1/2" & 4" |



Conduit Bushings

Application

Used to terminate rigid conduit or IMC to an enclosure

- Bushing throat provides a smooth surface to prevent damage to wire during pulling
- Available with 150°C rated insulator, 105°C rated insulator, or without insulator
- Available in zinc plated, high strength ductile iron or high strength zinc alloy



No Insulator

150°C Insulator

| ZINC CONDUIT BUSHINGS | | |
|-----------------------|-----------------|------------|
| CATALOG NUMBER | | TRADE SIZE |
| No Insulator | 150°C Insulator | |
| GB050 | GBI050 | 1/2" |
| GB075 | GBI075 | 3/4" |
| GB100 | GBI100 | 1" |
| GB125 | GBI125 | 1-1/4" |
| GB150 | GBI150 | 1-1/2" |
| GB200 | GBI200 | 2" |
| GB250 | GBI250 | 2-1/2" |
| GB300 | GBI300 | 3" |
| GB350 | GBI350 | 3-1/2" |
| GB400 | GBI400 | 4" |

GBI Series - Product includes black insulator

Standards

- UL 514B
- CSA 22.2 No. 18

Certifications

E155411

LR57925



No Insulator

105°C Insulator



150°C Insulator

| DUCTILE IRON CONDUIT BUSHINGS | | |
|-------------------------------|-----------------|-----------------|
| CATALOG NUMBER | | TRADE SIZE |
| No Insulator | 105°C Insulator | 150°C Insulator |
| MGB050 | MGBG050 | MGBI050 |
| MGB075 | MGBG075 | MGBI075 |
| MGB100 | MGBG100 | MGBI100 |
| MGB125 | MGBG125 | MGBI125 |
| MGB150 | MGBG150 | MGBI150 |
| MGB200 | MGBG200 | MGBI200 |
| MGB250 | MGBG250 | MGBI250 |
| MGB300 | MGBG300 | MGBI300 |
| MGB350 | MGBG350 | MGBI350 |
| MGB400 | MGBG400 | MGBI400 |
| MGB500 | MGBG500 | MGBI500 |
| MGB600 | MGBG600 | MGBI600 |

MGBG Series - Product includes gray insulator

MGBI Series - Product includes black insulator

Conduit Bushings W/O Lug

Application

Used to terminate threaded rigid conduit or IMC to an enclosure

- Bushing throat provides a smooth surface to prevent damage to wire during pulling
- Available with 150° C rated insulator, or without insulator
- Available in zinc plated, high strength ductile iron or high strength zinc alloy

ZINC CONDUIT BUSHINGS W/O LUG

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| GBI050T | 1/2" |
| GBI075T | 3/4" |
| GBI100T | 1" |
| GBI125T | 1-1/4" |
| GBI150T | 1-1/2" |
| GBI200T | 2" |
| GBI250T | 2-1/2" |
| GBI300T | 3" |
| GBI350T | 3-1/2" |
| GBI400T | 4" |

GBI Series - Product includes black insulator



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| DUCTILE IRON SET SCREW BUSHINGS | | |
|---------------------------------|-----------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| 105°C Insulator | 150°C Insulator | |
| MGBG050SS | MGBI050SS | 1/2" |
| MGBG075SS | MGBI075SS | 3/4" |
| MGBG100SS | MGBI100SS | 1" |
| MGBG125SS | MGBI125SS | 1-1/4" |
| MGBG150SS | MGBI150SS | 1-1/2" |
| MGBG200SS | MGBI200SS | 2" |
| MGBG250SS | MGBI250SS | 2-1/2" |
| MGBG300SS | MGBI300SS | 3" |
| MGBG350SS | MGBI350SS | 3-1/2" |
| MGBG400SS | MGBI400SS | 4" |
| MGBG500SS | MGBI500SS | 5" |
| MGBG600SS | MGBI600SS | 6" |

MGBG Series - Product includes gray insulator

MGBI Series - Product includes black insulator



105°C Insulator



150°C Insulator

| DUCTILE IRON SET SCREW BUSHINGS | |
|---------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MGB050T | 1/2" |
| MGB075T | 3/4" |
| MGB100T | 1" |
| MGB125T | 1-1/4" |
| MGB150T | 1-1/2" |
| MGB200T | 2" |
| MGB250T | 2-1/2" |
| MGB300T | 3" |
| MGB350T | 3-1/2" |
| MGB400T | 4" |
| MGB500T | 5" |
| MGB600T | 6" |

*- No Insulator with 3 tapped holes



Grounding Bushings - Lay-in Lug

Application

Used to terminate threaded rigid conduit, or IMC to an enclosure

- Provided with lay-in style aluminum lug for easy attachment of grounding wire
- Bushing throat provides a smooth surface to prevent damage to wire during pulling
- Available with 150° C or 105° C rated insulator
- Available in zinc plated, high strength ductile iron or high strength zinc alloy

Standards

- UL 467 & 486A-486B
- CSA C22.2 No. 41-13 & CSA C22.2 No. 65-13

Certifications



E88878

ZINC INSULATED LAY-IN LUG GROUND BUSHINGS

| CATALOG NUMBER | TRADE SIZE | LUG WIRE RANGE |
|----------------|------------|----------------|
| GBILA050 | GBILA050T | 1/2" |
| GBILA075 | GBILA075T | 3/4" |
| GBILA100 | GBILA100T | 1" |
| GBILA125 | GBILA125T | 1-1/4" |
| GBILA125S | -- | 1-1/4" |
| GBILA150 | GBILA150T | 1-1/2" |
| GBILA150S | -- | 1-1/2" |
| GBILA200 | GBILA200T | 2" |
| GBILA200S | -- | 2" |
| GBILA250 | GBILA250T | 2-1/2" |
| GBILA250S | -- | 2-1/2" |
| GBILA300 | GBILA300T | 3" |
| GBILA300S | -- | 3" |
| GBILA350 | GBILA350T | 3-1/2" |
| GBILA350S | GBILA350ST | 3-1/2" |
| GBILA400 | GBILA400T | 4" |
| GBILA400S | GBILA400ST | 4" |

*- Product with T suffix includes 3 pad machining
GBILA Series - Product includes black insulator



105°C Insulator



150°C Insulator

DUCTILE IRON INSULATED SET SCREW GROUND BUSHINGS

| CATALOG NUMBER | TRADE SIZE | LUG WIRE RANGE | | | |
|-----------------|-----------------|-----------------|-----------------|------------|----------------|
| 105°C Insulator | 150°C Insulator | 105°C Insulator | 150°C Insulator | TRADE SIZE | LUG WIRE RANGE |
| MGBGLA050 | MGBILA050 | MGBGLA050X | MGBILA050X | 1/2" | #14 - #4 |
| MGBGLA075 | MGBILA075 | MGBGLA075X | MGBILA075X | 3/4" | #14 - #4 |
| MGBGLA100 | MGBILA100 | MGBGLA100X | MGBILA100X | 1" | #14 - #4 |
| MGBGLA125 | MGBILA125 | MGBGLA125X | MGBILA125X | 1-1/4" | #14 - #4 |
| MGBGLA125S | MGBILA125S | MGBGLA125Y | MGBILA125Y | 1-1/4" #1 | 4 - #1/0 |
| MGBGLA150 | MGBILA150 | MGBGLA150X | MGBILA150X | 1-1/2" | #14 - #2 |
| MGBGLA150 | MGBILA150S | MGBGLA150Y | MGBILA150Y | 1-1/2" | #14 - #1/0 |
| MGBGLA200 | MGBILA200 | MGBGLA200X | MGBILA200X | 2" | #14 - #2 |
| MGBGLA200S | MGBILA200S | MGBGLA200Y | MGBILA200Y | 2" | #14 - #1/0 |
| MGBGLA250 | MGBILA250 | MGBGLA250X | MGBILA250X | 2-1/2" | #14 - #1/0 |
| MGBGLA250S | MGBILA250S | MGBGLA250Y | MGBILA250Y | 2-1/2" | #6 - #3/0 |
| MGBGLA250T | MGBILA250T | MGBGLA250Z | MGBILA250Z | 2-1/2" | #6 - 250MCM |
| MGBGLA300 | MGBILA300 | MGBGLA300X | MGBILA300X | 3" | #14 - #1/0 |
| MGBGLA300S | MGBILA300S | MGBGLA300Y | MGBILA300Y | 3" | #6 - #3/0 |
| MGBGLA300T | MGBILA300T | MGBGLA300Z | MGBILA300Z | 3" | #6 - 250MCM |
| MGBGLA350 | MGBILA350 | MGBGLA350X | MGBILA350X | 3-1/2" | #14 - #1/0 |
| MGBGLA350S | MGBILA350S | MGBGLA350Y | MGBILA350Y | 3-1/2" | #6 - #3/0 |
| MGBGLA350T | MGBILA350T | MGBGLA350Z | MGBILA350Z | 3-1/2" | #6 - 250MCM |
| MGBGLA400 | MGBILA400 | MGBGLA400X | MGBILA400X | 4" | #14 - #1/0 |
| MGBGLA400S | MGBILA400S | MGBGLA400Y | MGBILA400Y | 4" | #6 - #3/0 |
| MGBGLA400T | MGBILA400T | MGBGLA400Z | MGBILA400Z | 4" | #6 - 250MCM |
| MGBGLA500 | MGBILA500 | MGBGLA500X | MGBILA500X | 5" | #6 - 250MCM |
| MGBGLA500T | MGBILA500T | MGBGLA500Y | MGBILA500Y | 5" | #6 - #3/0 |
| MGBGLA600 | MGBILA600 | MGBGLA600X | MGBILA600X | 6" | #6 - 250MCM |
| MGBGLA600T | MGBILA600T | MGBGLA600Y | MGBILA600Y | 6" | #6 - #3/0 |

MGBGLA Series - Product includes gray insulator

MGBILA Series - Product includes black insulator

Grounding Bushings - Feed-thru Lug

Application

Used to terminate threaded rigid conduit, or IMC to an enclosure

- Provided with feed-thru aluminum lug for attaching a grounding wire
- Bushing throat provides a smooth surface to prevent damage to wire during pulling
- Available with 150° C rated insulator
- Available in zinc plated, high strength ductile iron or high strength zinc alloy

Standards

- UL 467 & 486A-486B
- CSA C22.2 No. 41-13 & C22.2 No. 65-13

Certifications



E88878

ZINC INSULATED FEED-THRU LUG GROUND BUSHINGS

| CATALOG NUMBER | TRADE SIZE | LUG WIRE RANGE |
|----------------|------------|----------------|
| GBILB050 | 1/2" | #14 - #4 |
| GBILB075 | 3/4" | #14 - #4 |
| GBILB100 | 1" | #14 - #4 |
| GBILB125 | 1-1/4" | #14 - #4 |
| GBILB150 | 1-1/2" | #14 - #2 |
| GBILB200 | 2" | #14 - #2 |
| GBILB250 | 2-1/2" | #14 - #1/0 |
| GBILB300 | 3" | #14 - #1/0 |
| GBILB350 | 3-1/2" | #14 - #2/0 |
| GBILB400 | 4" | #14 - #2/0 |

GBILB Series - Product includes black insulator



DUCTILE IRON INSULATED GROUND BUSHINGS

| CATALOG NUMBER | TRADE SIZE | LUG WIRE RANGE |
|----------------|------------|----------------|
| MGBILB050 | 1/2" | #14 - #4 |
| MGBILB075 | 3/4" | #14 - #4 |
| MGBILB100 | 1" | #14 - #4 |
| MGBILB125 | 1-1/4" | #14 - #4 |
| MGBILB150 | 1-1/2" | #14 - #2 |
| MGBILB200 | 2" | #14 - #2 |
| MGBILB250 | 2-1/2" | #14 - #1/0 |
| MGBILB250S | 2-1/2" | #6 - 250MCM |
| MGBILB300 | 3" | #14 - #1/0 |
| MGBILB300S | 3" | #6 - 250MCM |
| MGBILB350 | 3-1/2" | #14 - #2/0 |
| MGBILB350S | 3-1/2" | #6 - 250MCM |
| MGBILB400 | 4" | #14 - #2/0 |
| MGBILB400S | 4" | #6 - 250MCM |
| MGBILB500* | 5" | #6 - 250MCM |
| MGBILB600* | 6" | #6 - 250MCM |

* - Not UL Listed or CSA Certified.

MGBILB Series - Product includes black insulator

Grounding Bushings - Copper Lay-in Lug

Application

Used to terminate rigid conduit or IMC to an enclosure

- Provided with lay-in style copper lug for easy attachment of grounding wire
- Bushing throat provides a smooth surface to prevent damage to wire during pulling
- Available with 150° C or 105° C rated insulator
- Cast from high strength ductile iron and zinc plated

Standards

- UL 467
- CSA 22.2 No. 41

Certifications



E88878



LR57925



105°C Insulator



150°C Insulator



105°C Insulator



150°C Insulator

| DUCTILE IRON INSULATED GROUND BUSHINGS | | | |
|--|-----------------|------------|----------------|
| CATALOG NUMBER | | TRADE SIZE | LUG WIRE RANGE |
| 105°C Insulator | 150°C Insulator | 1/2" | #14 - #4 |
| MGBGLC050 | MGBILC050 | 1/2" | #14 - #4 |
| MGBGLC075 | MGBILC075 | 3/4" | #14 - #4 |
| MGBGLC100 | MGBILC100 | 1" | #14 - #4 |
| MGBGLC125 | MGBILC125 | 1-1/4" | #14 - #4 |
| MGBGLC125S | MGBILC125S | 1-1/4" | #8 - #1/0 |
| MGBGLC150 | MGBILC150 | 1-1/2" | #14 - #4 |
| MGBGLC150S | MGBILC150S | 1-1/2" | #8 - #1/0 |
| MGBGLC200 | MGBILC200 | 2" | #14 - #4 |
| MGBGLC200S | MGBILC200S | 2" | #8 - #1/0 |
| MGBGLC250 | MGBILC250 | 2-1/2" | #8 - #1/0 |
| MGBGLC250S | MGBILC250S | 2-1/2" | #6 - 250MCM |
| MGBGLC250T | MGBILC250T | 2-1/2" | #6 - #3/0 |
| MGBGLC300 | MGBILC300 | 3" | #8 - #1/0 |
| MGBGLC300S | MGBILC300S | 3" | #6 - 250MCM |
| MGBGLC300T | MGBILC300T | 3" | #6 - #3/0 |
| MGBGLC350 | MGBILC350 | 3-1/2" | #8 - #1/0 |
| MGBGLC350S | MGBILC350S | 3-1/2" | #6 - 250MCM |
| MGBGLC350T | MGBILC350T | 3-1/2" | #6 - #3/0 |
| MGBGLC400 | MGBILC400 | 4" | #8 - #1/0 |
| MGBGLC400S | MGBILC400S | 4" | #6 - 250MCM |
| MGBGLC400T | MGBILC400T | 4" | #6 - #3/0 |
| MGBGLC500 | MGBILC500 | 5" | #6 - 250MCM |
| MGBGLC500T | MGBILC500T | 5" | #6 - #3/0 |
| MGBGLC600 | MGBILC600 | 6" | #6 - 250MCM |
| MGBGLC600T | MGBILC600T | 6" | #6 - #3/0 |

MGBGLC Series - Product includes gray insulator

MGBILC Series - Product includes black insulator

| DUCTILE IRON INSULATED SET SCREW GROUND BUSHINGS | | | |
|--|-----------------|------------|----------------|
| CATALOG NUMBER | | TRADE SIZE | LUG WIRE RANGE |
| 105°C Insulator | 150°C Insulator | 1/2" | #14 - #4 |
| MGBGLC050X | MGBILC050X | 1/2" | #14 - #4 |
| MGBGLC075X | MGBILC075X | 3/4" | #14 - #4 |
| MGBGLC100X | MGBILC100X | 1" | #14 - #4 |
| MGBGLC125X | MGBILC125X | 1-1/4" | #14 - #4 |
| MGBGLC125Y | MGBILC125Y | 1-1/4" | #8 - #1/0 |
| MGBGLC150X | MGBILC150X | 1-1/2" | #14 - #4 |
| MGBGLC150Y | MGBILC150Y | 1-1/2" | #8 - #1/0 |
| MGBGLC200X | MGBILC200X | 2" | #14 - #4 |
| MGBGLC200Y | MGBILC200Y | 2" | #8 - #1/0 |
| MGBGLC250X | MGBILC250X | 2-1/2" | #8 - #1/0 |
| MGBGLC250Y | MGBILC250Y | 2-1/2" | #6 - #3/0 |
| MGBGLC250Z | MGBILC250Z | 2-1/2" | #6 - 250MCM |
| MGBGLC300X | MGBILC300X | 3" | #8 - #1/0 |
| MGBGLC300Y | MGBILC300Y | 3" | #6 - #3/0 |
| MGBGLC300Z | MGBILC300Z | 3" | #6 - 250MCM |
| MGBGLC350X | MGBILC350X | 3-1/2" | #8 - #1/0 |
| MGBGLC350Y | MGBILC350Y | 3-1/2" | #6 - #3/0 |
| MGBGLC350Z | MGBILC350Z | 3-1/2" | #6 - 250MCM |
| MGBGLC400X | MGBILC400X | 4" | #8 - #1/0 |
| MGBGLC400Y | MGBILC400Y | 4" | #6 - #3/0 |
| MGBGLC400Z | MGBILC400Z | 4" | #6 - 250MCM |
| MGBGLC500X | MGBILC500X | 5" | #6 - 250MCM |
| MGBGLC500Y | MGBILC500Y | 5" | #6 - #3/0 |
| MGBGLC600X | MGBILC600X | 6" | #6 - 250MCM |
| MGBGLC600Y | MGBILC600Y | 6" | #6 - #3/0 |

MGBGLC Series - Product includes gray insulator

MGBILC Series - Product includes black insulator

90° Rigid Pull Elbows

Application

Used to make a 90° connection with two runs of threaded rigid conduit or IMC

- Removable aluminum cover permits access for wire pulling
- Furnished with or without rubber gasket
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| CONDUIT TO CONDUIT | | |
|--------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| PE050RRG | PE050RR | 1/2" |
| PE075RRG | PE075RR | 3/4" |
| PE100RRG | -- | 1" |
| PE125RRG | -- | 1-1/4" |

*- Product with G suffix includes gasket



90° Rigid Pull Elbows

Application

Used to make a 90° connection of Threaded Rigid conduit or IMC to a metal box or enclosure enclosure

- Removable aluminum cover permits access for wire pulling
- Furnished with or without rubber gasket
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| CONDUIT TO ENCLOSURE | | |
|----------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| PE050RBG | PE050RB | 1/2" |
| PE075RBG | PE075RB | 3/4" |
| PE100RBG | -- | 1" |
| PE125RBG | -- | 1-1/4" |

*- Product with G suffix includes gasket



Water Tight Hubs

Application

Used to terminate rigid threaded conduit or IMC to enclosure

- Assembled with 90°C rated insulator and rubber sealing ring
- UL listed and CSA certified for wet locations
- Meets NEMA sealing requirements for Type 2, 3, 3R, 4, 5, 12 and 13 enclosures
- Die-cast from high strength zinc alloy

| WATER TIGHT HUBS | | |
|------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| WTH050 | WTH050I | 1/2" |
| WTH075 | WTH075I | 3/4" |
| WTH100 | WTH100I | 1" |
| WTH125 | WTH125I | 1-1/4" |
| WTH150 | WTH150I | 1-1/2" |
| WTH200 | WTH200I | 2" |
| WTH250 | WTH250I | 2-1/2" |
| WTH300 | WTH300I | 3" |
| WTH350 | WTH350I | 3-1/2" |
| WTH400 | WTH400I | 4" |

*- Product with I suffix includes purple insulator



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

LR57925

Water Tight Ground Hubs

Application

Used to terminate rigid threaded conduit or IMC to enclosure

- Assembled with 90°C rated insulator and rubber sealing ring
- UL listed and CSA certified for wet locations
- Meets NEMA sealing requirements for Type 2, 3, 3R, 4, 5, 12 and 13 enclosures
- Die-cast from high strength zinc alloy
- Bonding screw for grounding

| WATER TIGHT GRD HUBS | |
|----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| WTHG050I | 1/2" |
| WTHG075I | 3/4" |
| WTHG100I | 1" |
| WTHG125I | 1-1/4" |
| WTHG150I | 1-1/2" |
| WTHG200I | 2" |
| WTHG250I | 2-1/2" |
| WTHG300I | 3" |
| WTHG350I | 3-1/2" |
| WTHG400I | 4" |

*- Product with I suffix includes purple insulator



Standards

- UL 467
- CSA C22.2 No. 41-13

Certifications

E88878

LR57925

Water Tight Ground Nut

Application

- Used for securing water tight hubs
- Die-cast from high strength zinc alloy
- Available with bonding screw for grounding

Standards

- UL 467
- CSA C22.2 No. 41-13

Certifications

 E88878

 LR57925

| WATER TIGHT GRD NUT | |
|---------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| WTGN050 | 1/2" |
| WTGN075 | 3/4" |
| WTGN100 | 1" |
| WTGN125 | 1-1/4" |
| WTGN150 | 1-1/2" |
| WTGN200 | 2" |
| WTGN250 | 2-1/2" |
| WTGN300 | 3" |
| WTGN350 | 3-1/2" |
| WTGN400 | 4" |



Conduit Nipples

Application

- Used with locknut to serve as a short raceway between enclosures
- Available with or without 90° C rated insulated throat
- Cast from high strength zinc alloy or zinc plated, high strength ductile iron

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925



ZINC CONDUIT NIPPLES

| ZINC CONDUIT NIPPLES | |
|----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CN050 | CN050I |
| CN075 | CN075I |
| CN100 | CN100I |
| CN125 | CN125I |
| CN150 | CN150I |
| CN200 | CN200I |
| CN250 | CN250I |
| CN300 | CN300I |
| CN350 | CN350I |
| CN400 | CN400I |

*- Product with I suffix includes purple insulator



DUCTILE IRON CONDUIT NIPPLES

| DUCTILE IRON CONDUIT NIPPLES | |
|------------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MCN050 | MCN050I |
| MCN075 | MCN075I |
| MCN100 | MCN100I |
| MCN125 | MCN125I |
| MCN150 | MCN150I |
| MCN200 | MCN200I |
| MCN250 | MCN250I |
| MCN300 | MCN300I |
| MCN350 | MCN350I |
| MCN400 | MCN400I |
| MCN500 | MCN500I |
| MCN600 | MCN600I |

*- Product with I suffix includes gray insulator

Three Piece Couplings

Application

Used to connect two lengths of rigid threaded conduit or IMC, when neither conduit can be turned

- Available in zinc plated, high strength ductile iron or high strength aluminum alloy



DUCTILE IRON THREE PIECE COUPLINGS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| MTPC050 | 1/2" |
| MTPC075 | 3/4" |
| MTPC100 | 1" |
| MTPC125 | 1-1/4" |
| MTPC150 | 1-1/2" |
| MTPC200 | 2" |
| MTPC250 | 2-1/2" |
| MTPC300 | 3" |
| MTPC350 | 3-1/2" |
| MTPC400 | 4" |
| MTPC500* | 5" |
| MTPC600* | 6" |

Standards

- UL 514B
- CSA C22.2 No. 18

Certifications

E155411
 LR57925



ALUMINUM THREE PIECE COUPLINGS*

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| TPC050 | 1/2" |
| TPC075 | 3/4" |
| TPC100 | 1" |
| TPC125 | 1-1/4" |
| TPC150 | 1-1/2" |
| TPC200 | 2" |
| TPC250 | 2-1/2" |
| TPC300 | 3" |
| TPC350 | 3-1/2" |
| TPC400 | 4" |

* - cULus listed

Floor Flanges

Application

Used to secure rigid conduit or IMC to the floor

- Cast from high strength ductile iron and zinc plated

| FLOOR FLANGES | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MFF050 | 1/2" |
| MFF075 | 3/4" |
| MFF100 | 1" |
| MFF125 | 1-1/4" |
| MFF150 | 1-1/2" |
| MFF200 | 2" |



Offset Nipples

Application

Used to offset the axis of a raceway by 3/4"

- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| OFFSET NIPPLES | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ON050 | 1/2" |
| ON075 | 3/4" |
| ON100 | 1" |
| ON125 | 1-1/4" |
| ON150 | 1-1/2" |
| ON200 | 2" |
| ON250 | 2-1/2" |
| ON300 | 3" |



Rigid Box Spacers

Application

Used as a raceway between two enclosures

- Cast from high strength zinc alloy

| BOX SPACER | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| BSP050 | 1/2" |
| BSP075 | 3/4" |
| BSP200 | 2" |



Certifications

 E155411

 LR57925

Zinc Die-Cast Locknuts

Application

- Used for securing rigid IMC conduits and other threaded connectors to outlet boxes or enclosures
- Designed with highly effective cast threads
 - Serrations provided on both sides for improved grip
 - Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

-  E155411
-  LR57925

| ZINC DIE-CAST LOCKNUTS | |
|------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| LNC050 | 1/2" |
| LNC075 | 3/4" |
| LNC100 | 1" |
| LNC125 | 1-1/4" |
| LNC150 | 1-1/2" |
| LNC200 | 2" |
| LNC250 | 2-1/2" |
| LNC300 | 3" |
| LNC350 | 3-1/2" |
| LNC400 | 4" |



Reducer Bushings

Application

- Used to reduce the entry size of threaded rigid conduit or IMC and allow joining conduits of two different sizes
- Cast from high strength zinc alloy

| REDUCER BUSHING | |
|-----------------|--------------|
| CATALOG NUMBER | TRADE SIZE |
| RB075/050 | 3/4" to 1/2" |
| RB100/050 | 1" to 1/2" |
| RB100/075 | 1" to 3/4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

-  E155411
-  LR57925

Rigid Set Screw Connectors

Application

Used to connect threadless rigid conduit or IMC to a steel box or other enclosure

- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

ZINC RIGID SET SCREW CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| RSCN050 | 1/2" |
| RSCN075 | 3/4" |



Concrete Slab Elbow

Application

Used to create floor mounts and ceiling drops in poured concrete

- Used in prefabricated in-slab conduit systems
- Simplifies in-slab work
- Smooth interior for safe wire pulling
- Cast from high strength zinc alloy
- Warning sticker pasted on the flange

CONCRETE SLAB ELBOW

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| CEB050 | 1/2" |
| CEB075 | 3/4" |
| CEB100 | 1" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

90° Short Radius Elbows

Application

Used to connect threaded rigid conduit or IMC to a steel box or other enclosure where a close radius is desired

- Cast from high strength zinc alloy

SHORT RADIUS ELBOWS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| SRE050 | 1/2" |
| SRE075 | 3/4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR51725

Clamp Backs

Application

- Provide space between conduit and mounting surface
- Used with one hole straps to support rigid conduit or IMC
 - Cast from high strength ductile iron and zinc plated

Standards

- UL 2239
- CSA 22.2 No. 18

Certifications

 E229278
LISTED

 LR57925

| CLAMP BACKS | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MCB050 | 1/2" |
| MCB075 | 3/4" |
| MCB100 | 1" |
| MCB125 | 1-1/4" |
| MCB150 | 1-1/2" |
| MCB200 | 2" |
| MCB250 | 2-1/2" |
| MCB300 | 3" |
| MCB350 | 3-1/2" |
| MCB400 | 4" |



One Hole Straps

Application

- Used to support rigid conduit or IMC to mounting surface
- Can be used with clamp backs
 - 2-1/2" through 4" trade sizes are also approved for use with EMT
 - Cast from high strength ductile iron and zinc plated

Standards

- UL 2239
- CSA 22.2 No. 18

Certifications

 E229278
LISTED

 LR57925

| ONE HOLE STRAPS | |
|-----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MS037* | 3/8" |
| MS050 | 1/2" |
| MS075 | 3/4" |
| MS100 | 1" |
| MS125 | 1-1/4" |
| MS150 | 1-1/2" |
| MS200 | 2" |
| MS250 | 2-1/2" |
| MS300 | 3" |
| MS350 | 3-1/2" |
| MS400 | 4" |

* - MS037 is not UL listed



Steel Straps

Application

Used to support rigid conduit or IMC where greater load bearing is required

- Snap-on style enables easy installation
- Made of stamped steel with zinc plating
- Approved for indoor and outdoor use

| ONE HOLE RIGID STRAPS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| RS0501 | 1/2" |
| RS0751 | 3/4" |
| RS1001 | 1" |
| RS1251 | 1-1/4" |
| RS1501 | 1-1/2" |
| RS2001 | 2" |
| RS2501 | 2-1/2" |
| RS3001* | 3" |

* - Item not UL listed



Standards

- UL 2239
- CSA C22.2 No. 18.4-15

Certifications

 E229278

| TWO HOLE RIGID STRAPS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| RS0502 | 1/2" |
| RS0752 | 3/4" |
| RS1002 | 1" |
| RS1252 | 1-1/4" |
| RS1502 | 1-1/2" |
| RS2002 | 2" |
| RS2502 | 2-1/2" |
| RS3002 | 3" |
| RS3502 | 3-1/2" |
| RS4002 | 4" |



Plastic Bushings

Application

Plastic insulating bushings are used on the end of Rigid and IMC conduits and other threaded connectors to provide a smooth, well-rounded bearing surface to protect wires or cables.

- Rated 105°C
- Flame retardant
- Made of high grade plastic

| PLASTIC BUSHINGS | |
|------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| PB050 | 1/2" |
| PB075 | 3/4" |
| PB100 | 1" |
| PB125 | 1-1/4" |
| PB150 | 1-1/2" |
| PB200 | 2" |
| PB250 | 2-1/2" |
| PB300 | 3" |
| PB350 | 3-1/2" |
| PB400 | 4" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



Steel Locknuts

Application

Conduit locknuts are used for securing Rigid and IMC conduits and other threaded connectors to a steel outlet box or metal enclosure.

- Made of steel

| STEEL LOCKNUT | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| SLN037 | 3/8" |
| SLN050 | 1/2" |
| SLN075 | 3/4" |
| SLN100 | 1" |
| SLN125 | 1-1/4" |
| SLN150 | 1-1/2" |
| SLN200 | 2" |
| SLN250 | 2-1/2" |
| SLN300 | 3" |
| SLN400 | 4" |



Reducing Washer

Application

Reducing washers are used to reduce the size of a knock-out in a steel outlet box or metal enclosure. Two reducing washers are required for each knock-out

- Made of stamped steel with zinc plating

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| REDUCING WASHER | |
|-----------------|-----------------|
| CATALOG NUMBER | TRADE SIZE |
| RW075/050 | 3/4" - 1/2" |
| RW100/050 | 1" - 1/2" |
| RW100/075 | 1" - 3/4" |
| RW125/050 | 1-1/4" - 1/2" |
| RW125/075 | 1-1/4" - 3/4" |
| RW125/100 | 1-1/4" - 1" |
| RW150/050 | 1-1/2" - 1/2" |
| RW150/075 | 1-1/2" - 3/4" |
| RW150/100 | 1-1/2" - 1" |
| RW150/125 | 1-1/2" - 1-1/4" |
| RW200/050 | 2" - 1/2" |
| RW200/075 | 2" - 3/4" |
| RW200/100 | 2" - 1" |
| RW200/125 | 2" - 1-1/4" |
| RW200/150 | 2" - 1-1/2" |
| RW250/050 | 2-1/2" - 1/2" |
| RW250/075 | 2-1/2" - 3/4" |
| RW250/100 | 2-1/2" - 1" |
| RW250/125 | 2-1/2" - 1-1/4" |
| RW250/150 | 2-1/2" - 1-1/2" |
| RW250/200 | 2-1/2" - 2" |



Clamp Type Connectors

Application

- Used to terminate NM sheathed cable, flexible cord or SE cable to outlet boxes and enclosures in dry locations
- Assembled with die-cast locknut and zinc plated steel screws
- Also available with Snap Lock technology for tool-less assembly to outlet boxes and enclosures in dry locations
- Die-cast from high strength zinc alloy
- Refer to connector listing section for specific cable and conduit ranges and approvals

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

-  E213494- RX037, RX075, RX100, RX125
-  E213494- RX037S, RX075S
-  LR57925- RX037, RX075, RX100, RX125

| CLAMP TYPE CONNECTORS | | |
|-----------------------|------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | NM CABLE RANGE |
| RX037 | 3/8" | (1) 14/2 - 12/2 (2) 14/2 |
| RX037S | 3/8" | 14/2 - 12/2 |
| RX037U | 3/8" | 14/2 - 12/2 |
| RX075 | 3/4" | 10/3 - 8/2 |
| RX075S | 3/4" | 10/3 - 8/3 |
| RX100 | 1" | 10/3 - 4/3 |
| RX100U | 1" | 10/3 - 4/3 |
| RX125 | 1-1/4" | 4/3 - 2/3 |

*- Product with U suffix does not include a locknut

** - Product with "S" suffix includes Snap Lock® technology



Locknut Style



Snap Lock® Style

Clamp Type Connectors

Application

- Used to terminate SE and SER cables to outlet boxes and enclosures in dry locations
- Assembled with die-cast locknut and zinc plated steel screws
 - Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

-  E155410
-  LR57925

| CLAMP TYPE CONNECTORS | | | |
|-----------------------|------------|-----------------------------------|---------------------|
| CATALOG NUMBER | TRADE SIZE | SE OVAL CABLE RANGE | SE OVAL CABLE RANGE |
| RX150 | 1-1/2" | 1.150" x 0.730" - 1.410" x 0.890" | 1.48 |
| RX200 | 2" | 0.700" x 1.200" - 0.870" x 1.460" | 0.750" thru 1.460" |
| SEC125 | 1-1/4" | 1.065" x 0.635" - 1.250" x 0.740" | -- |
| SEC150 | 1-1/2" | 1.065" x 0.635" - 1.250" x 0.740" | -- |
| SEC200 | 2" | 1.405" x 0.875" - 1.450" x 0.875" | -- |



RX Type



SEC Type

Service Entrance Cable Heads

Application

- Used with Type SEU service entrance cable
- Removal cap and two piece insulator make wire pulling and assembly easy
 - UL listed and CSA certified for dry location use
 - Die-cast from high strength, corrosion and weather resistant aluminum alloy

| CABLE HEADS | |
|----------------|---------------|
| CATALOG NUMBER | TRADE SIZE |
| SCEH1 | 3#8 - 3#1 |
| SCEH2 | 3#1/0 - 3#4/0 |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155410
 LR57925

Service Entrance Heads - Clamp-on Type

Application

Clamp-on type head used with rigid conduit, IMC or EMT for pulling service drop conductors

- Assembled with electrical grade insulator with multiple holes
- UL listed and CSA certified for wet location use
- Die-cast from high strength, corrosion and weather resistant aluminum alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E121487
 LR57925

| CLAMP-ON SERVICE ENTRANCE HEADS | | | | |
|---------------------------------|------------|-------------------------|-----------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | INSULATOR HOLE SIZES | NUMBER OF HOLES | INSULATOR CATALOG NUMBER |
| C0050 | 1/2" | 19/64" | 4 | ECI050 |
| C0075 | 3/4" | 3/8" 13/32" | 2 3 | ECI075 |
| C0100 | 1" | 7/16" 1/2" | 2 3 | ECI100 |
| C0125 | 1-1/4" | 19/45" 5/8" | 2 3 | ECI125 |
| C0150 | 1-1/2" | 19/32" 7/16" 3/4" | 2 1 3 | ECI150 |
| C0200 | 2" | 17/32" 3/4" 1" | 1 2 3 | ECI200 |
| C0250 | 2-1/2" | 7/8" 1" 1-5/16" | 3 1 3 | ECI250 |
| C0300 | 3" | 7/8" 1" 1-5/16" | 3 1 3 | ECI250 |
| C0300L | 3" | 1-1/8" 1-3/4" | 4 3 | ECI3007 |
| C0350 | 3-1/2" | 1-1/8" 1-3/4" | 4 3 | ECI3007 |
| C0400 | 4" | 1-1/8" 1-3/4" | 4 3 | ECI3007 |



Service Entrance Heads - Threaded Type

Application

Threaded type head used with rigid conduit and IMC for pulling service drop conductors

- Assembled with electrical grade insulator with multiple holes
- UL listed and CSA certified for wet location use
- Die-cast from high strength, corrosion and weather resistant aluminum alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E121487

 LR57925



| CLAMP-ON SERVICE ENTRANCE HEADS | | | | |
|---------------------------------|------------|--------------------------|-----------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | INSULATOR HOLE SIZES | NUMBER OF HOLES | INSULATOR CATALOG NUMBER |
| TH050 | 1/2" | 19/64" 3/8" 13/32" | 4 2 3 | ECI050 |
| TH100 | 1" | 7/16" | 2 | ECI100 |
| | | 1/2" | 3 | |
| TH125 | 1-1/4" | 19/45" 5/8" | 2 3 | ECI125 |
| | | 19/32" 7/16" 3/4" | 2 1 3 | |
| TH150 | 1-1/2" | 17/32" 3/4" 1" | 1 2 3 | ECI150 |
| | | 7/8" 1" 1-5/16" | 3 1 3 | |
| TH200 | 2" | 7/8" 1" 1-5/16" | 3 1 3 | ECI200 |
| | | 1-1/8" 1-3/4" | 4 3 | |
| TH250 | 2-1/2" | 1-1/8" 1-3/4" | 4 3 | ECI250 |
| | | 7/8" 1" 1-5/16" | 3 1 3 | |
| TH300 | 3" | 1-1/8" 1-3/4" | 4 3 | ECI250 |
| | | 1-1/8" 1-3/4" | 2 4 | |
| TH300L | 3" | 1-1/8" 1-3/4" | 4 3 | ECI3007 |
| TH350 | 3-1/2" | 1-1/8" 1-3/4" | 4 3 | ECI3007 |
| TH400 | 4" | 1-1/8" 1-3/4" | 2 4 | ECI3006 |
| TH500* | 5" | 1-1/8" 1-3/4" | 2 4 | ECI3006 |
| TH600* | 6" | 1-1/8" 1-3/4" | 2 4 | ECI3006 |

* - Not UL listed or CSA certified

Service Entrance Heads - Mast Type

Application

Mast type head used with rigid and IMC for pulling service drop conductors

- Assembled with electrical grade insulator with multiple holes
- UL listed and CSA certified for wet location use
- Die-cast from high strength, corrosion and weather resistant aluminum alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E121487

 LR57925

| MAST HEADS | | | | |
|----------------|------------------------------|-------------------------|-----------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | INSULATOR HOLE SIZES | NUMBER OF HOLES | INSULATOR CATALOG NUMBER |
| MT1 | 2" Conduit 1-1/4" Cap | 19/45" 5/8" | 2 3 | ECI125 |
| | | 19/45" 5/8" | 2 3 | |
| MT2 | 2-1/2" Conduit 1-1/4" Cap | 19/45" 5/8" | 2 3 | ECI125 |
| | | 19/32" 7/16" 3/4" | 2 1 3 | |
| MT3 | 2" Conduit 1-1/2" Cap | 19/32" 7/16" 3/4" | 2 1 3 | ECI150 |
| | | 17/32" 3/4" 1" | 1 2 3 | |
| MT4 | 2-1/2" Conduit 2" Cap | 17/32" 3/4" 1" | 1 2 3 | ECI200 |



Service Entrance Heads - Set Screw Type

Application

Set screw type head used with rigid and IMC for pulling service drop conductors

- Assembled with electrical grade insulator with multiple holes
- UL listed and CSA certified for wet location use
- Die-cast from high strength, corrosion and weather resistant aluminum alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E121487

 LR57925



| SET SCREW SERVICE ENTRANCE HEADS | | | | |
|----------------------------------|------------|----------------------|-----------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | INSULATOR HOLE SIZES | NUMBER OF HOLES | INSULATOR CATALOG NUMBER |
| SS050 | 1/2" | 19/64" | 4 | ECI050 |
| SS075 | 3/4" | 3/8" | 2 | ECI075 |
| | | 13/32" | 3 | |
| SS100 | 1" | 7/16" | 2 | ECI100 |
| | | 1/2" | 3 | |
| SS125 | 1-1/4" | 19/45" | 2 | ECI125 |
| | | 5/8" | 3 | |
| SS150 | 1-1/2" | 19/32" | 2 | ECI150 |
| | | 7/16" | 1 | |
| | | 3/4" | 3 | |
| SS200 | 2" | 17/32" | 1 | ECI200 |
| | | 3/4" | 2 | |
| | | 1" | 3 | |
| SS250 | 2-1/2" | 7/8" | 3 | ECI250 |
| | | 1" | 1 | |
| | | 1-5/16" | 3 | |
| SS300 | 3" | 7/8" | 3 | ECI250 |
| | | 1" | 1 | |
| | | 1-5/16" | 3 | |
| SS300L | 3" | 1-1/8" | 4 | ECI3007 |
| SS350 | 3-1/2" | 1-3/4" | 3 | ECI3007 |
| | | 1-1/8" | 4 | |
| SS400 | 4" | 1-3/4" | 3 | ECI3006 |
| | | 1-1/8" | 2 | |

NM Cable Connector

Application

NM cable connectors are used to terminate NM Sheathed cable or Flexible cord to a knockout in a dry location box or enclosure

- Easy snap-in construction
- Wide variety of cable configurations
- Non-Metallic

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E213494

| NM CABLE CONNECTOR | | | | |
|--------------------|------------|---------------|--------------------|-----------------|
| CATALOG NUMBER | TRADE SIZE | KNOCKOUT SIZE | NM (ONE CABLE) | NM (TWO CABLES) |
| PNMR037 | 3/8" | 1/2" | 14/2 - 6/2 12/4 | 14/2 - 10/2 |
| PNMR075 | 3/4" | 3/4" | 6/2 - 6/3 | 14/3 - 10/2 |



Insulators for Service Entrance Heads

Application

Used with clamp-on, threaded, set screw and mast type service entrance heads

| PHENOLIC INSULATORS | | |
|---------------------|-------------------------|-----------------|
| CATALOG NUMBER | INSULATOR HOLE SIZES | NUMBER OF HOLES |
| ECI050 | 19/64" | 4 |
| ECI075 | 3/8" 13/32" | 2 3 |
| ECI100 | 7/16" 1/2" | 2 3 |
| ECI125 | 19/45" 5/8" | 2 3 |
| ECI150 | 19/32" 7/16" 3/4" | 2 1 3 |
| ECI200 | 17/32" 3/4" 1" | 1 2 3 |
| ECI250 | 7/8" 1" 1-5/16" | 3 1 3 |
| ECI3006 | 1-1/8" 1-3/4" | 2 4 |
| ECI3007 | 1-1/8" 1-3/4" | 4 3 |



Conduit Sill Plates

Application

Used in conjunction with sealing compound to protect EMT or service entrance cable and cover the hole where it enters the building

- Die-cast from high strength Aluminium alloy
- Supplied with mounting screws

| CONDUIT SILL PLATES | | |
|---------------------|-------------|--------------------------|
| CATALOG NUMBER | TRADE SIZE | NUMBER OF MOUNTING HOLES |
| SPC050/075 | 1/2" - 3/4" | 2 |
| SPC100 | 1" | 2 |
| SPC125 | 1-1/4" | 4 |
| SPC150 | 1-1/2" | 4 |
| SPC200 | 2" | 4 |



2 Mounting Holes



4 Mounting Holes

Water-tight Connectors

Application

Used to connect service entrance cable to a metal enclosure or service enclosure in wet locations

- Die-cast from high strength zinc alloy
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155410
LISTED

 LR57925

| WATER-TIGHT CONNECTORS | | |
|------------------------|------------|--------------------|
| CATALOG NUMBER | TRADE SIZE | SE OVAL CABLE SIZE |
| WC1004 | 1" | 0.400 by 0.630 |
| WC1006 | 1" | 0.440 by 0.700 |
| WC1008 | 1" | 0.500 by 0.800 |
| WC1251 | 1-1/4" | 0.510 by 0.850 |
| WC1252 | 1-1/4" | 0.570 by 0.940 |
| WC1253 | 1-1/4" | 0.660 by 1.120 |
| WC15010 | 1-1/2" | 0.705 by 1.195 |
| WC15020 | 1-1/2" | 0.740 by 1.235 |
| WC20010 | 2" | 0.705 by 1.195 |
| WC20020 | 2" | 0.705 by 1.235 |
| WC20030 | 2" | 0.830 by 1.415 |
| WC20040 | 2" | 0.850 by 1.540 |
| WC20040L | 2" | 0.995 by 1.580 |



UF Cable Connectors

Application

Used to secure UF cable to a metal enclosure or waterproof box with a threaded hub

- Die-cast from high strength zinc alloy
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E213494
LISTED

 LR57925

| UF CONNECTORS | | |
|----------------|------------|-------------|
| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
| UFC050 | 1/2" | 12/2 |
| UFC075 | 3/4" | 12/3 |



Straight Squeeze Connectors

Application

Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure or outlet box

- Available in zinc plated, high strength iron or high strength zinc alloy
- Zinc connectors assembled with die-cast locknut and zinc plated steel screws
- Iron connectors assembled with steel locknut and zinc plated steel screws
- Available with 90° C rated throat insulator
- Refer to connector listing section for specific cable and conduit ranges and approvals

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



ZINC STRAIGHT SQUEEZE CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| SSQ037 | SSQ037I** |
| SSQ050 | SSQ050I |
| SSQ075 | SSQ075I |
| SSQ100 | SSQ100I |
| SSQ125 | SSQ125I |
| SSQ150 | SSQ150I |
| SSQ150U | -- |
| SSQ200 | SSQ200I |
| SSQ200U | -- |
| SSQ250 | SSQ250I |
| SSQ300 | SSQ300I |
| SSQ350 | SSQ350I |
| SSQ350U | -- |
| SSQ400 | SSQ400I |

*- Product with I suffix includes red** & purple insulator

**- Product with U suffix does not include a locknut

IRON STRAIGHT SQUEEZE CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| MSSQ050 | MSSQ050I |
| MSSQ075 | MSSQ075I |
| MSSQ100 | MSSQ100I |
| MSSQ125 | MSSQ125I |
| MSSQ150 | MSSQ150I |
| MSSQ200 | MSSQ200I |
| MSSQ250 | MSSQ250I |
| MSSQ300 | MSSQ300I |
| MSSQ350 | MSSQ350I |
| MSSQ400 | MSSQ400I |

**- Product with I suffix includes gray insulator



Angled Squeeze Connectors

Application

Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure or outlet box

- Available in zinc plated, high strength iron or high strength zinc alloy
- Zinc connectors assembled with die-cast locknut and zinc plated steel screws
- Iron connectors assembled with steel locknut and zinc plated steel screws
- Available with 90° C rated throat insulator
- Refer to connector listing section for specific cable and conduit ranges and approvals

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



ZINC 90° SQUEEZE CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| ASQ037 | ASQ037I |
| ASQ037DSI** | -- |
| ASQ050 | ASQ050I |
| ASQ050DSI** | -- |
| ASQ075 | ASQ075I |
| ASQ100 | ASQ100I |
| ASQ125 | ASQ125I |
| ASQ150 | ASQ150I |
| ASQ200 | ASQ200I |
| ASQ250 | ASQ250I |
| ASQ300 | ASQ300I |
| ASQ350 | ASQ350I |
| ASQ400 | ASQ400I |

*- Product with I suffix includes red** & purple insulator

** - Product with "S" suffix includes Snap Lock® technology

*** - Product with "DSI" suffix includes Insulated, Double Snap Lock® technology

IRON 90° SQUEEZE CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| MASQ050 | MASQ050I |
| MASQ075 | MASQ075I |
| MASQ100 | MASQ100I |
| MASQ125 | MASQ125I |
| MASQ150 | MASQ150I |
| MASQ200 | MASQ200I |
| MASQ250 | MASQ250I |
| MASQ300 | MASQ300I |
| MASQ350 | MASQ350I |
| MASQ400 | MASQ400I |

**- Product with I suffix includes gray insulator



IRON 90° DUPLEX CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| MDA037 | 3/8" |



E155411-ASQ037DSI, ASQ050DSI, MDA037

Screw-In Connectors

Application

Used to terminate steel or aluminum flexible metal conduit to an enclosure or outlet box

- Fitting screws into conduit for ease of assembly
- Assembled with die-cast zinc locknut
- Available with 90° C rated throat insulator
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

 E155411- SICN037S, SICN050S



Without Insulator



With Insulator



Snap Lock® Style

| SCREW-IN CONNECTORS | | |
|---------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| SICN037 | SICN037I | 3/8" |
| SICN037S | -- | 3/8" |
| SICN050 | SICN050I | 1/2" |
| SICN050S | -- | 1/2" |
| SICN075 | SICN075I | 3/4" |
| SICN100 | SICN100I | 1" |
| SICN125 | SICN125I | 1-1/4" |
| SICN150 | SICN150I | 1-1/2" |
| SICN200 | SICN200I | 2" |

*- Product with I suffix includes purple insulator

*- Products with "S" suffix include Snap Lock® technology

Screw-In Couplings

Application

Used to connect two lengths of steel or aluminum flexible metal conduit

- Fitting screws into conduit for ease of assembly
- Die-cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| SCREW-IN COUPLINGS | |
|--------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| SICP050 | 1/2" |
| SICP075 | 3/4" |
| SICP100 | 1" |
| SICP125 | 1-1/4" |
| SICP150 | 1-1/2" |
| SICP200 | 2" |



Set Screw Connectors

Application

Used to terminate steel or iron flexible metal conduit to an enclosure or outlet box

- Assembled with die-cast zinc locknut and zinc plated steel screw
- Available with 90° C rated throat insulator
- Die-cast from high strength zinc alloy
- Refer to connector listing section for specific cable and conduit ranges and approvals

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

| SET SCREW CONNECTORS | | |
|----------------------|------------|------|
| CATALOG NUMBER | TRADE SIZE | |
| FCA050 | FCA050I | 1/2" |
| FCA075 | FCA075I | 3/4" |

*- Product with I suffix includes purple insulator



Without Insulator

With Insulator

Combination Connector

Application

Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure or outlet box

- Assembled with die-cast zinc locknut or snap-fit spring and zinc plated steel screws
- Die-cast from high strength zinc alloy
- Refer to connector listing section for specific cable and conduit ranges and approvals

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E155411

 LR57925

 174008

| COMBINATION CONNECTOR | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| FBMC037 | 3/8" |
| FBMC037S | 3/8" |



BX Connectors

Application

- Used to terminate armored or metal clad cable to an enclosure or outlet box
- Die-cast from high strength zinc alloy
 - Refer to Connector Listing Section for specific cable and conduit ranges and approvals


Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



E155411

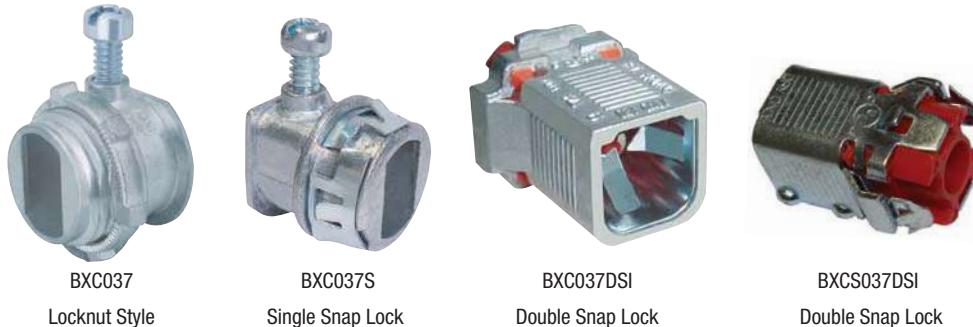

BXC037

Locknut Style

BXC037S

Single Snap Lock

BXC037DSI

Double Snap Lock

BXCS037DSI

Double Snap Lock

One Hole BX Strap

Application

One hole straps are used to provide support for runs of Armored Cable.

- Zinc Plated Steel

| ONE HOLE BX STRAP | |
|-------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| BXS037 | 3/8" |



Anti-Short Bushing

Application

Anti-short bushings are inserted into the end of AC or FMC in order to protect the conductors from the sharp edges of the raceway where cut.

- Non-Metallic

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



E121487

| ANTI-SHORT BUSHING | |
|--------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| ASB0 | 0 |
| ASB1 | 1 |
| ASB2 | 2 |
| ASB3 | 3 |
| ASB4 | 4 |



Saddle Connectors

Application

- Used to terminate non-metallic, armored or metal clad cables to an enclosure or outlet box
- Die-cast from high strength zinc alloy
 - Refer to Connector Listing Section for specific cable and conduit ranges and approvals

| SADDLE CONNECTORS | |
|-------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| SAD037 | 3/8" |
| SAD037S | 3/8" |
| SAD037DC | 3/8" |
| SAD050DC | 1/2" |
| SAD075DC | 3/4" |
| SAD100DC | 1" |

*- Product with DC suffix includes die cast clamp

*- Products with "S" suffix include Snap Lock® technology

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

- E155411- SAD037
- LR57925- SAD037
- E155411



SAD037
Locknut Style



SAD037S
Snap Lock® Style



SAD037DC

Duplex Connectors

Application

- Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure
- Available with one or two zinc plated steel screws
 - Available in high strength zinc alloy or steel
 - Refer to connector listing section for specific cable and conduit ranges and approvals

| DUPLEX CONNECTORS | |
|-------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| DUP1 | 3/8" |
| DUP2 | 3/8" |
| DUP1S | 3/8" |
| DUP1DSI | 3/8" |
| DUPS1DSI | 3/8" |

*- Products with "S" suffix include Snap Lock® technology

**- Product with "DSI" suffix includes red Insulated, Double Snap Lock® technology



Locknut Style



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

- E155411- DUP1, DUP2
- LR57925 - DUP1, DUP2
- E155411 - DUP1S, DUP1DSI, DUPS1DSI



Duplex Connector



Two Screw Locknut Style

Strap Squeeze Connector

Application

Used to terminate flexible metal conduit, armored or metal clad cables to an enclosure or outlet box

- Assembled with die-cast zinc locknut and zinc plated steel screw
- Die-cast from high strength zinc alloy
- Refer to connector listing section for specific cable and conduit ranges and approvals

| STRAP CONNECTOR | |
|-----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| SC050 | 1/2" |



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

LR57925

Snap Connector

Application

Snap-in connectors are used to terminate AC, MC, FMC/RWFMC to a knockout in an enclosure or outlet box

- No tools required
- Zinc Plated Steel

| SNAP CONNECTOR | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| AMC050 | 1/2" |
| AMC075 | 3/4" |
| AMC052 | 1/2" |

**- Product includes red insulator



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

Combination Couplings

Application

Used to connect steel EMT to Non Metallic Sheathed Cable or Flexible Metal Conduit

- EMT side is set screw type and flex side is compression type
- Die-cast from high strength zinc alloy

| COMBINATION COUPLINGS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CMB037SS | 3/8" |
| CMB050SS | 1/2" |
| CMB075SS | 3/4" |



CMB037SS



CMB050SS

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E210498

LR57925

DBL Snap Cut-in BX Connectors

Application

Used to terminate armored or metal clad cable to an enclosure or outlet box

- Die-cast from high strength zinc alloy
- Refer to Connector Listing Section for specific cable and conduit ranges and approvals

| DBL SNAP CUT-IN BX CONN | |
|-------------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| CBXC037DSI | 3/8" |

**- Product includes red insulator,
Double Snap Lock® technology



Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

E155411

Zinc Straight Liquid-Tight Connectors

Application

Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure

- Connectors can be used with tapered female entry or unthreaded knock out using the provided sealing washer and locknut
- Available with or without 90° C rated throat insulators
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



E155411



LR57925

ZINC STRAIGHT LIQUID-TIGHT CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| LTS037 | 3/8" |
| LTS050 | 1/2" |
| LTS075 | 3/4" |
| LTS075U | 3/4" |
| LTS100 | 1" |
| -- | 1" |
| LTS125 | 1-1/4" |
| -- | 1-1/4" |
| LTS150 | 1-1/2" |
| LTS200 | 2" |
| LTS250 | 2-1/2" |
| LTS300 | 3" |
| LTS350 | 3-1/2" |
| LTS400 | 4" |

*- Product with I suffix includes purple insulator

*- Product with U suffix is W/O Locknut



Without Insulator



With Insulator

Zinc 90° Liquid-Tight Connectors

Application

Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure at a 90° angle

- Connectors can be used with tapered female entry or unthreaded knock out using the provided sealing washer and locknut
- Available with or without 90° C rated throat insulators
- Cast from high strength zinc alloy

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



E155411



LR57925

ZINC 90° LIQUID-TIGHT CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| LTA037 | 3/8" |
| LTA050 | 1/2" |
| LTA075 | 3/4" |
| LTA075U | 3/4" |
| LTA100 | 1" |
| LTA125 | 1-1/4" |
| LTA150 | 1-1/2" |
| LTA200 | 2" |
| LTA250 | 2-1/2" |
| LTA300 | 3" |
| LTA350 | 3-1/2" |
| LTA400 | 4" |

*- Product with I suffix includes purple insulator

*- Product with U suffix is W/O Locknut



Without Insulator



With Insulator

Plastic Straight Liquid-tight Connectors

Application

Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure

- Connectors can be used with tapered female entry or unthreaded knock out using the provided sealing washer and locknut
- Made from high grade plastic

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



PLASTIC STRAIGHT LIQUID-TIGHT CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| PLTS037 | -- |
| PLTS050 | PLTS050B |
| PLTS075 | PLTS075B |
| PLTS100 | PLTS100B |
| PLTS125 | PLTS125B |

*- Product with B suffix includes Black color



Plastic 90° Liquid-tight Connectors

Application

Used to terminate and seal liquid-tight flexible metal and non-metallic type B conduit to a box or enclosure at a 90° angle

- Connectors can be used with tapered female entry or unthreaded knock out using the provided sealing washer and locknut
- Made from high grade plastic

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



PLASTIC 90° LIQUID-TIGHT CONNECTORS

| CATALOG NUMBER | TRADE SIZE |
|----------------|------------|
| PLTA037 | -- |
| PLTA050 | PLTA050B |
| PLTA075 | PLTA075B |
| PLTA100 | PLTA100B |

*- Product with B suffix includes Black color



Iron Liquid Tight Fittings

Application

Used to terminate and seal liquid tight flexible metal and liquid tight flexible non-metallic type B Conduits to either an oil-tight, liquid-tight, rain-tight box, or enclosure

- Connectors can be used with tapered thread female entry or unthreaded knock-out using the provided sealing washer and locknut
- Available with or without 105° C rated throat insulators
- Cast from high strength iron - zinc plated
- Furnished with Sealing Ring

Standards

- UL 514B
- CSA C22.2 No. 18
- NEC Article 351
- NEMA FB-1

Certifications



| STRAIGHT LT FITTINGS | | |
|----------------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| MNTS037* | MNTS037I* | 3/8" |
| MNTS050* | MNTS050I* | 1/2" |
| MNTS075* | MNTS075I* | 3/4" |
| MNTS100* | MNTS100I* | 1" |
| MLTS125 | MLTS125I | 1-1/4" |
| MLTS150 | MLTS150I | 1-1/2" |
| MLTS200 | MLTS200I | 2" |
| MLTS250 | MLTS250I | 2-1/2" |
| MLTS300 | MLTS300I | 3" |
| MLTS350 | MLTS350I | 3-1/2" |
| MLTS400 | MLTS400I | 4" |

*- Product with "I" suffix includes purple insulator

*- Product available with Steel nut



| 90° LT FITTINGS | | |
|-----------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| MNTA037* | MNTA037I* | 3/8" |
| MNTA050* | MNTA050I* | 1/2" |
| MNTA075* | MNTA075I* | 3/4" |
| MNTA100* | MNTA100I* | 1" |
| MLTA125 | MLTA125I | 1-1/4" |
| MLTA150 | MLTA150I | 1-1/2" |
| MLTA200 | MLTA200I | 2" |
| MLTA250 | MLTA250I | 2-1/2" |
| MLTA300 | MLTA300I | 3" |
| MLTA350 | MLTA350I | 3-1/2" |
| MLTA400 | MLTA400I | 4" |

*- Product with "I" suffix includes purple insulator

*- Product available with Steel nut



| 45° LT FITTINGS | | |
|-----------------|------------|--------|
| CATALOG NUMBER | TRADE SIZE | |
| MNTY037* | MNTY037I* | 3/8" |
| MNTY050* | MNTY050I* | 1/2" |
| MNTY075* | MNTY075I* | 3/4" |
| MNTY100* | MNTY100I* | 1" |
| MLTY125 | MLTY125I | 1-1/4" |
| MLTY150 | MLTY150I | 1-1/2" |
| MLTY200 | MLTY200I | 2" |
| MLTY250 | MLTY250I | 2-1/2" |
| MLTY300 | MLTY300I | 3" |
| MLTY350 | MLTY350I | 3-1/2" |
| MLTY400 | MLTY400I | 4" |

*- Product with "I" suffix includes purple insulator

*- Product available with Steel nut



Iron Liquid Tight Grounding Connectors

Application

Used to terminate and seal liquid tight flexible metal and liquid tight flexible non-metallic type B conduits to either an oil-tight, liquid-tight, rain-tight box, or enclosure

- Connectors can be used with tapered thread female entry or unthreaded knock-out using the provided sealing washer and locknut.
- Available with or without 105° C rated throat insulators
- Cast from high strength iron and zinc plated
- Furnished with Sealing Ring
- Furnished with AL and CU grounding lugs

Standards

- UL 467
- CSA 22.2 No. 18
- NEC Article 351

Certifications



| STRAIGHT LT FITTINGS WITH LUGS | | | | TRADE SIZE | LUG WIRE RANGE |
|--------------------------------|-----------|------------|------------|------------|----------------|
| CATALOG NUMBER | | | | | |
| MNTS037L* | MNTS037C* | MNTS037IL* | MNTS037IC* | 3/8" | #14 - #4 |
| MNTS050L* | MNTS050C* | MNTS050IL* | MNTS050IC* | 1/2" | #14 - #4 |
| MNTS075L* | MNTS075C* | MNTS075IL* | MNTS075IC* | 3/4" | #14 - #4 |
| MNTS100L* | MNTS100C* | MNTS100IL* | MNTS100IC* | 1" | #14 - #4 |
| MLTS125L | MLTS125C | MLTS125IL | MLTS125IC | 1-1/4" | #14 - #4 |
| MLTS150L | MLTS150C | MLTS150IL | MLTS150IC | 1-1/2" | #14 - #4 |
| MLTS200L | MLTS200C | MLTS200IL | MLTS200IC | 2" | #14 - #4 |
| MLTS250L | MLTS250C | MLTS250IL | MLTS250IC | 2-1/2" | #8 - #1/0 |
| MLTS300L | MLTS300C | MLTS300IL | MLTS300IC | 3" | #8 - #1/0 |
| MLTS350L | MLTS350C | MLTS350IL | MLTS350IC | 3-1/2" | #6 - #3/0 |
| MLTS400L | MLTS400C | MLTS400IL | MLTS400IC | 4" | #6 - #3/0 |

*- Product with L suffix includes Aluminum Grounding Lug & C suffix includes Copper Grounding Lug

*- Product with IL suffix includes purple Insulated Throat with Aluminum Grounding Lug & IC suffix includes purple Insulated Throat with Copper Grounding Lug

*- Product available with Steel nut



| 90° LT FITTINGS WITH LUGS | | | | TRADE SIZE | LUG WIRE RANGE |
|---------------------------|-----------|------------|------------|------------|----------------|
| CATALOG NUMBER | | | | | |
| MNTA037L* | MNTA037C* | MNTA037IL* | MNTA037IC* | 3/8" | #14 - #4 |
| MNTA050L* | MNTA050C* | MNTA050IL* | MNTA050IC* | 1/2" | #14 - #4 |
| MNTA075L* | MNTA075C* | MNTA075IL* | MNTA075IC* | 3/4" | #14 - #4 |
| MNTA100L* | MNTA100C* | MNTA100IL* | MNTA100IC* | 1" | #14 - #4 |
| MLTA125L | MLTA125C | MLTA125IL | MLTA125IC | 1-1/4" | #14 - #4 |
| MLTA150L | MLTA150C | MLTA150IL | MLTA150IC | 1-1/2" | #14 - #4 |
| MLTA200L | MLTA200C | MLTA200IL | MLTA200IC | 2" | #14 - #4 |
| MLTA250L | MLTA250C | MLTA250IL | MLTA250IC | 2-1/2" | #8 - #1/0 |
| MLTA300L | MLTA300C | MLTA300IL | MLTA300IC | 3" | #8 - #1/0 |
| MLTA350L | MLTA350C | MLTA350IL | MLTA350IC | 3-1/2" | #6 - #3/0 |
| MLTA400L | MLTA400C | MLTA400IL | MLTA400IC | 4" | #6 - #3/0 |

*- Product with L suffix includes Aluminum Grounding Lug & C suffix includes Copper Grounding Lug

*- Product with IL suffix includes purple Insulated Throat with Aluminum Grounding Lug & IC suffix includes Insulated Throat with Copper Grounding Lug

*- Product available with Steel nut



| 45° LT FITTINGS WITH LUGS | | | | TRADE SIZE | LUG WIRE RANGE |
|---------------------------|-----------|------------|------------|------------|----------------|
| CATALOG NUMBER | | | | | |
| MNTY037L* | MNTY037C* | MNTY037IL* | MNTY037IC* | 3/8" | #14 - #4 |
| MNTY050L* | MNTY050C* | MNTY050IL* | MNTY050IC* | 1/2" | #14 - #4 |
| MNTY075L* | MNTY075C* | MNTY075IL* | MNTY075IC* | 3/4" | #14 - #4 |
| MNTY100L* | MNTY100C* | MNTY100IL* | MNTY100IC* | 1" | #14 - #4 |
| MLTY125L | MLTY125C | MLTY125IL | MLTY125IC | 1-1/4" | #14 - #4 |
| MLTY150L | MLTY150C | MLTY150IL | MLTY150IC | 1-1/2" | #14 - #4 |
| MLTY200L | MLTY200C | MLTY200IL | MLTY200IC | 2" | #14 - #4 |
| MLTY250L | MLTY250C | MLTY250IL | MLTY250IC | 2-1/2" | #8 - #1/0 |
| MLTY300L | MLTY300C | MLTY300IL | MLTY300IC | 3" | #8 - #1/0 |
| MLTY350L | MLTY350C | MLTY350IL | MLTY350IC | 3-1/2" | #6 - #3/0 |
| MLTY400L | MLTY400C | MLTY400IL | MLTY400IC | 4" | #6 - #3/0 |

*- Product with L suffix includes Aluminum Grounding Lug & C suffix includes Copper Grounding Lug

*- Product with IL suffix includes purple Insulated Throat with Aluminum Grounding Lug & IC suffix includes Insulated Throat with Copper Grounding Lug

*- Product available with Steel nut



Ground Rod Clamps

Application

Used to connect bare copper wire to copper ground rod or rebar

- Cast from high strength, highly conductive copper alloy
- All listed models approved for Direct Burial in earth and concrete

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

 E88878

 LR57925

| STANDARD GROUND CLAMPS WITH BRONZE HEX BOLTS | | | | |
|--|-----------------|------------|------------|--------------------|
| CATALOG NUMBER | COPPER ROD SIZE | WIRE RANGE | REBAR SIZE | BOLT SIZE (UNC-2A) |
| R11 | 1/2" | #10 - #2 | 3/8" | 3/8-16 |
| R22 | 1/2" & 5/8" | #10 - #2 | 1/2" | 3/8-16 |
| R33 | 3/4" | #10 - #2 | 5/8" | 3/8-16 |



STANDARD GROUND CLAMPS WITH STAINLESS STEEL HEX BOLTS

| CATALOG NUMBER | COPPER ROD SIZE | WIRE RANGE | REBAR SIZE | BOLT SIZE (UNC-2A) |
|----------------|-------------------|------------|------------|--------------------|
| R11SS | 1/2" | #10 - #2 | 3/8" | 3/8-16 |
| R22SS | 1/2" & 5/8" | #10 - #2 | 1/2" | 3/8-16 |
| R33SS | 3/4" | #10 - #2 | 5/8" | 3/8-16 |
| R11USS | 1/2", 5/8" & 3/4" | #10 - #1/0 | - | 3/8-16 |



STANDARD GROUND CLAMPS WITH BRONZE HEX BOLTS

| CATALOG NUMBER | COPPER ROD SIZE | WIRE RANGE | REBAR SIZE | BOLT SIZE (UNC-2A) |
|----------------|-----------------|------------|------------|--------------------|
| R10* | 3/8" | #10 - #4 | - | 5/16-18 |
| R1 | 1/2" | #10 - #2 | 3/8" | 7/16-14 |
| R2 | 5/8" | #8 - #1/0 | 1/2" | 7/16-14 |
| R3 | 3/4" | #8 - #1/0 | 5/8" | 7/16-14 |

*Not UL or CSA certified



STANDARD GROUND CLAMPS WITH BRONZE HEX BOLTS

| CATALOG NUMBER | COPPER ROD SIZE | WIRE RANGE | BOLT SIZE (UNC-2A) |
|----------------|-----------------|------------|--------------------|
| HDC34S | 3/4" | #8 - #3/0 | 1/2-13 |

Combination Ground Clamps for Bare Wire

Application

Used to connect bare copper wire to water pipe or rebar

- Available with lay-in style lug for fast and easy installation of ground wires
- Cast from high strength, highly conductive copper alloy
- All models approved for Direct Burial in earth and concrete
- RBC4D features super-compact design ideal for rebar grids, pools and spas
- Available with bronze or stainless steel hardware

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications



| LAY-IN LUG STYLE GROUND CLAMPS | | | | | |
|--------------------------------|------------|------------|-------------|-----------------|-----------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | REBAR RANGE | LUG STYLE | HARDWARE |
| RBC2D | 1/2" - 1" | #10 - #2 | 3/8" - 1" | In-Line | Bronze |
| RBC2SS | 1/2" - 1" | #10 - #2 | 3/8" - 1" | In-Line | Stainless Steel |
| RBC3D | 1/2" - 1" | #10 - #2 | 3/8" - 1" | Perpendicular | Bronze |
| RBC4D | 1/2" - 1" | #10 - #2 | 3/8" - 1" | Compact In-Line | Bronze |



RBC2D

RBC3D

RBC4D

| FEED-THROUGH LUG STYLE GROUND CLAMPS | | | | | |
|--------------------------------------|------------|------------|-------------|-----------|----------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | REBAR RANGE | LUG STYLE | SCREW MATERIAL |
| RBC1D | 1/2" - 1" | #10 - #2 | 3/8" - 1" | In-Line | Bronze |



Ground Clamps for Bare Wire

Application

Used to connect bare copper wire to galvanized steel water pipe or copper tubing

- Cast from high strength, highly conductive copper alloy
- Select models approved for use with rebar and copper ground rod

| STANDARD BRONZE GROUND CLAMPS | | | | | |
|-------------------------------|-------------|------------|-------------|------------------|-------------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | REBAR RANGE | COPPER ROD RANGE | HARDWARE |
| C11 | 1/2" - 1" | #10 - #2 | 5/8" - 3/4" | 1/2" - 1" | Zinc plated steel |
| C11B | 1/2" - 1" | #10 - #2 | 5/8" - 3/4" | 1/2" - 1" | Brass |
| C5* | 1/2" - 1" | #8 - #2 | - | 1/2" - 1" | Zinc plated steel |
| C22 | 1-1/4" - 2" | #10 - #2 | - | - | Zinc plated steel |
| C4 | 2-1/2" - 4" | #10 - #2 | - | - | Zinc plated steel |
| C8 | 4" - 6" | #10 - #2 | - | - | Zinc plated steel |

* - Light Duty Construction



Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

E88878

LR57925

| DIRECT BURIAL BRONZE GROUND CLAMPS | | | | | |
|------------------------------------|-------------|------------|-------------|------------------|-----------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | REBAR RANGE | COPPER ROD RANGE | HARDWARE |
| C11D | 1/2" - 1" | #10 - #2 | 1/2" - 1" | 1/2" - 1" | Bronze |
| C11SS* | 1/2" - 1" | #10 - #2 | 1/2"" - 1" | 1/2" - 1" | Stainless steel |
| C22D | 1-1/4" - 2" | #10 - #2 | - | - | Bronze |
| C22SS* | 1-1/4" - 2" | #10 - #2 | - | - | Stainless steel |

* - Products are cULus listed with stainless steel screw



Ground Clamps for Bare Wire

Application

Used to connect copper or aluminum ground conductor to galvanized water pipe, copper water tubing, or ground rod

- Cast from high strength zinc alloy

Standards

- UL 467 & 486A-486B
- CSA C22.2 No. 41-13 & C22.2 No. 65-13

Certifications

 E88878
LISTED

 LR57925

| ZINC GROUND CLAMPS | | | | |
|--------------------|------------|------------|------------------|-------------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | COPPER ROD RANGE | SCREW MATERIAL |
| CZ11 | 1/2" - 1" | #10 - #2 | 1/2" - 1" | Zinc plated steel |
| CZ11P* | 1/2" - 1" | #10 - #2 | 1/2" - 1" | Zinc plated steel |

*- P suffix indicates plated zinc (brass in color); not UL listed



Ground Clamps for Armored Wire

Application

Used to connect bare or armored copper wire to steel water pipe

- Integral clamp securely holds armor
- Standard hardware is zinc plated steel
- Cast from high strength zinc alloy

| ZINC GROUND CLAMPS | | | |
|--------------------|------------|------------|------------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | COPPER ROD RANGE |
| CZ6* | 1/2" - 1" | #8 - #4 | - |
| CZ6P* | 1/2" - 1" | #8 - #4 | - |

*- Product is not UL or CSA listed



Ground Clamps for Armored Wire

Application

Used to connect bare or armored copper wire to steel water pipe

- Integral clamp securely holds armor
- Standard hardware is zinc plated steel, Direct Burial product uses bronze screws
- Cast from high strength, highly conductive copper alloy
- Select models approved for use with copper ground rod

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

 E88878

 LR57925

| STANDARD BRONZE GROUND CLAMPS | | | |
|-------------------------------|-------------|------------|------------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | COPPER ROD RANGE |
| C6 | 1/2" - 1" | #8 - #4 | 1/2" - 1" |
| C7 | 1-1/4" - 2" | #8 - #4 | - |
| C71* | 2-1/2" - 4" | #8 - #4 | - |
| C72* | 4-1/2" - 6" | #8 - #4 | - |

*- Products are not UL or CSA listed



| DIRECT BURIAL BRONZE GROUND CLAMPS | | | |
|------------------------------------|------------|------------|------------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | COPPER ROD RANGE |
| C6D* | 1/2" - 1" | #8 - #4 | 1/2" - 1" |

*- Product assembled with bronze hardware



Ground Clamps for Rigid Conduit

Application

Used to connect copper grounding conductor to rigid conduit or IMC to steel or copper water pipe

- Cast from high strength, highly conductive copper alloy
- Assembled with zinc plated steel screws
- Select models available with brass screws

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

 E88878

 LR57925

| BRONZE GROUND CLAMPS WITH STANDARD HUBS | | | |
|---|-------------|------------|--------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | CONDUIT SIZE |
| C61 | 1/2" - 1" | #8 - #4 | 1/2" |
| C61B* | 1/2" - 1" | #8 - #4 | 1/2" |
| C62 | 1/2" - 1" | #8 - #4 | 3/4" |
| C62B* | 1/2" - 1" | #8 - #4 | 3/4" |
| C63 | 1/2" - 1" | #8 - #4 | 1" |
| C66 | 1-1/4" - 2" | #8 - #4 | 1/2" |
| C67 | 1-1/4" - 2" | #8 - #4 | 3/4" |
| C68 | 1-1/4" - 2" | #8 - #4 | 1" |
| C41 | 2-1/2" - 4" | #8 - #4 | 1/2" |
| C42 | 2-1/2" - 4" | #8 - #4 | 3/4" |
| C43 | 2-1/2" - 4" | #8 - #4 | 1" |
| C81 | 4" - 6" | #8 - #4 | 1/2" |
| C82 | 4" - 6" | #8 - #4 | 3/4" |
| C83 | 4" - 6" | #8 - #4 | 1" |

*- Product with "B" suffix assembled with brass screws



Ground Clamps for Rigid Conduit with 360° Swivel Hub

Application

Used to connect copper grounding conductor in rigid conduit or IMC to steel or copper water pipe

- Cast from high strength, highly conductive copper alloy
- Integral clamp swivels 360° for easy alignment
- Assembled with zinc plated steel screws

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

 E88878

 LR57925

| BRONZE GROUND CLAMPS WITH SWIVEL HUBS | | | |
|---------------------------------------|-------------|------------|--------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | CONDUIT SIZE |
| C11LH1 | 1/2" - 1" | #10 - #6 | 1/2" |
| C11DLH1D* | 1/2" - 1" | #10 - #6 | 1/2" |
| C11LH2 | 1/2" - 1" | #10 - #2/0 | 3/4" |
| C11LH3 | 1/2" - 1" | #10 - #3/0 | 1" |
| C22LH1 | 1-1/4" - 2" | #10 - #6 | 1/2" |
| C22LH2 | 1-1/4" - 2" | #10 - #2/0 | 3/4" |
| C22LH3 | 1-1/4" - 2" | #10 - #3/0 | 1" |
| C4LH1 | 2-1/4" - 4" | #10 - #6 | 1/2" |
| C4LH2 | 2-1/4" - 4" | #10 - #2/0 | 3/4" |
| C4LH3 | 2-1/4" - 4" | #10 - #3/0 | 1" |

*- Product with "B" suffix assembled with brass screws



Ground Clamps for Rigid Conduit with Copper Straps

Application


Used to connect copper grounding conductor in rigid conduit or IMC to steel or copper water pipe, or copper ground rod

- Cast from high strength, highly conductive copper alloy
- Copper strap allows flexibility during and after installation and helps protect conduit from vibration
- Assembled with zinc plated steel screws

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications



BRONZE GROUND CLAMPS WITH STANDARD HUB & STRAP

| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | CONDUIT SIZE |
|----------------|------------|------------|--------------|
| C11CSH1 | 1/2" - 1" | #8 - #4 | 1/2" |
| C11CSH2 | 1/2" - 1" | #8 - #4 | 3/4" |
| C11CSH3 | 1/2" - 1" | #8 - #4 | 1" |



BRONZE GROUND CLAMPS WITH SWIVEL HUB & STRAP

| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | CONDUIT SIZE |
|----------------|------------|------------|--------------|
| C11CSLH1 | 1/2" - 1" | #10 - #6 | 1/2" |
| C11CSLH2 | 1/2" - 1" | #10 - #2/0 | 3/4" |
| C11CSLH3 | 1/2" - 1" | #10 - #3/0 | 1" |



C11CSLH1

C11CSLH2 & 3

Ground Clamps for Rigid Conduit or EMT with 360° Swivel Hub

Application


Used to connect copper grounding conductor in rigid conduit, IMC, or EMT to steel or copper water pipe, or copper ground rod

- Integral hub accommodates rigid, IMC or EMT conduit and swivels 360° for easy alignment
- Cast from high strength, highly conductive copper alloy
- Assembled with zinc plated steel screws

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications



BRONZE GROUND CLAMPS WITH COMBINATION SWIVEL HUB

| CATALOG NUMBER | PIPE RANGE | WIRE RANGE | RIGID CONDUIT SIZE | EMT SIZE |
|----------------|-------------|------------|--------------------|-------------|
| C11JPT | 1/2" - 1" | #10 - #6 | 1/2" | 1/2" - 3/4" |
| C22JPT | 1-1/4" - 2" | #10 - #6 | 1/2" | 1/2" - 3/4" |
| C4JPT | 2-1/2" - 4" | #10 - #6 | 1/2" | 1/2" - 3/4" |



360° Swivel Hub

Application

Used to connect bare or armored copper wire to steel or copper water pipe

- Integral clamp swivels 360° for easy alignment
- Cast from high strength, highly conductive copper alloy
- Assembled with zinc plated steel screws

BRONZE GROUND CLAMPS WITH SWIVEL HUB

| CATALOG NUMBER | PIPE RANGE | WIRE RANGE |
|----------------|------------|------------|
| JA | NA | #10 - #6 |



Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

E88878

LR57925

Ground Clamps for Armored Wire with 360° Swivel Hub

Application

Used to connect bare or armored copper wire to steel or copper water pipe

- Integral clamp securely holds armor
- Integral clamp swivels 360° for easy alignment
- Cast from high strength, highly conductive copper alloy
- Assembled with zinc plated steel screws

BRONZE GROUND CLAMPS WITH SWIVEL HUB

| CATALOG NUMBER | PIPE RANGE | WIRE RANGE |
|----------------|-------------|------------|
| C11JA | 1/2" - 1" | #10 - #6 |
| C22JA | 1-1/4" - 2" | #10 - #6 |
| C4JA | 2-1/2" - 4" | #10 - #6 |



Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

E88878

LR57925

Conduit Hubs

Application

Used with grounding pipe clamps to connect rigid conduit to water pipe for grounding

- Cast from high strength, highly conductive copper alloy
- Copper strap allows flexibility during and after installation and helps protect conduit from vibration
- Assembled with zinc plated steel screws

Standards

- UL 467
- CSA C22.2 No. 41
- NEC Article 250

Certifications

 E88878

 LR57925

| STANDARD BRONZE HUB | | |
|---------------------|------------|------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE |
| H1 | 1/2" | #8 - #4 |
| H2 | 3/4" | #8 - #4 |
| H3 | 1" | #8 - #4 |



| 360° SWIVEL TYPE BRONZE HUB | | |
|-----------------------------|------------|------------|
| CATALOG NUMBER | PIPE RANGE | WIRE RANGE |
| LH1 | 1/2" | #10 - #6 |
| LH2 | 3/4" | #10 - #2/0 |
| LH3 | 1" | #10 - #3/0 |



LH1



LH2 & 3

Jumper Clamps

Application

Used to provide an easy jumper connection with a wide range of conductors

- Parallel groove design doesn't require removal of bolt for installation
- Cast from high strength, highly conductive copper alloy
- Available with various plating options (see table)

Standards

- UL 467

Certifications

 E88878

| BRONZE JUMPER CLAMPS | |
|----------------------|----------------------------|
| CATALOG NUMBER | PLATING |
| K1 | One groove plating removed |
| K2 | Fully tin plated |
| K3 | Not plated |
| KUL | Fully tin plated |

| WIRE RANGES - ALL STYLES | | |
|--------------------------|-----------------|----------------------------|
| SIDE 1 | SIDE 2 | TIGHTENING TORQUE (in-lbs) |
| 2/0 str. | 2/0 str. | 180 in-lb |
| 2/0 str. | #8 AWG Cu, Str. | 160 in-lb |
| 2/0 str. | #8 AWG Cu, Sol. | 150 in-lb |
| 2/0 str. | #6 AWG Cu, Sol. | 150 in-lb |
| 1/0 ACSR | 1/0 ACSR | 120 in-lb |



Tank Ground Connectors

Application

Used for grounding connections on distribution transformer tanks

- Cast from high strength, highly conductive copper alloy
- Two way models accommodate cable in horizontal or vertical orientations
- Available with tin plating ("TP" suffix)

| TANK GROUND CONNECTORS | | | |
|------------------------|-------|------------|---------|
| CATALOG NUMBER | STYLE | WIRE RANGE | PLATING |
| TG011A | 1 Way | #10 - #1 | None |
| TG011ATP | 1 Way | #10 - #1 | Tin |
| TG020A | 1 Way | #8 - #2/0 | None |
| TG020ATP | 1 Way | #8 - #2/0 | Tin |
| TGT12A | 2 Way | #10 - #1 | None |
| TGT12ATP | 2 Way | #10 - #1 | Tin |
| TGT21A | 2 Way | #8 - #2/0 | None |
| TGT21ATP | 2 Way | #8 - #2/0 | Tin |

* - Products are not UL or CSA listed



1 Way



2 Way

Intersystem Bonding Bridge

Application

Used in residential and commercial applications to ground up to 4 systems to a single location

- Meets 2011 NEC Clause 250.94 for Intersystem Bonding Termination
- Lay-in style connection for up to 4 auxiliary ground wires - 1 more than NEC requirement
- Available in die-cast zinc or copper alloy , or aluminum
- Plastic cover provides an aesthetically pleasing installation and provides protection
- Approved for use with solid or stranded copper conductors
- Assembled with stainless steel screws and plastic cover

Standards

- UL 467
- CSA C22.2 No. 41-13
- UL 486A-486B
- CSA 22.2 No. 65-13

Certifications



| INTERSYSTEM BONDING BRIDGE | | | |
|----------------------------|-----------------------|----------------------|----------------|
| CATALOG NUMBER | MAIN SCREW WIRE RANGE | TAP SCREW WIRE RANGE | MATERIAL |
| IBB03 | #6 - #2 | #14 - #4 | Aluminum Alloy |
| IBBZ03 | #6 - #2 | #14 - #4 | Zinc Alloy |
| IBBZ03Z | #6 - #2 | #14 - #4 | Zinc Alloy |
| IBBCU03 | #6 - #2 | #14 - #4 | Copper Alloy |



Zinc



Copper

Grounding Lugs

Application

Used to bond wires and surfaces for grounding applications

- Lay-in option allows quick and easy installation even after conductors are run
- Listed for use with solid and stranded, copper and aluminum conductors
- Copper lug is listed for Direct Burial and is ideal for swimming pool and solar grounding applications

| LAY-IN ALUMINUM LUGS | |
|----------------------|-------------|
| CATALOG NUMBER | WIRE RANGE |
| LA4 | #14 - #4 |
| LA2 | #14 - #2 |
| LA1/0 | #14 - #1/0 |
| LA3/0 | #6 - #3/0 |
| LA250 | #6 - 250MCM |



Standards

- UL 467 & 486A-486B
- CSA C22.2 NO. 41 & 22.2 No. 65-13

Certifications

E88878

E257216

| FEED-THROUGH ALUMINUM LUGS | |
|----------------------------|------------|
| CATALOG NUMBER | WIRE RANGE |
| LB4 | #14 - #4 |
| LB2 | #14 - #2 |
| LB1/0 | #14 - #1/0 |
| LB2/0 | #14 - #2/0 |



| LAY-IN CAST COPPER LUGS | |
|-------------------------|------------|
| CATALOG NUMBER | WIRE RANGE |
| LA4C | #14 - #4 |
| LA4CD* | #14 - #4 |

*- P suffix indicates tin plated

| LAY-IN COPPER LUGS | |
|--------------------|-------------|
| CATALOG NUMBER | WIRE RANGE |
| LC4CU | #14 - #4 |
| LC1/0CU | #8 - #1/0 |
| LC3/0CU | #3/0 - #4 |
| LC250CU | #6 - 250MCM |



Conduit Hangers

Application

Used to secure and support EMT and rigid conduit from overhead supports

- Assembled with carriage bolt and nut
- Zinc plated, stamped steel construction

Standards

- UL 2239
- CSA C22.2 No. 18.4-15

Certifications

 E229278
LISTED

| CONDUIT HANGERS | | | |
|-----------------|------------|----------|-------------|
| CATALOG NUMBER | TRADE SIZE | EMT SIZE | RIGID SIZE |
| CH050 | 0 | 1/2" | 3/8" & 1/2" |
| CH075 | 1 | 3/4" | 3/4" |
| CH100 | 2 | 1" | 1" |
| CH125 | 2-1/2" | 1-1/4" | - |
| CH125A | 3 | 1-1/2" | 1-1/4" |
| CH150 | 4 | - | 1-1/2" |
| CH200 | 5 | 2" | 2" |
| CH250 | 6 | - | 2-1/2" |
| CH300 | 7 | - | 3" |



Conduit Supports - Ductile Iron

Application

Used to support and secure rigid conduit, IMC, or EMT to a mounting surface

- Cast from high strength iron/ductile iron and zinc plated
- Available with threaded rod, lag screw, or clamp only

| CONDUIT SUPPORTS | | |
|------------------|------------|-------------------------|
| CATALOG NUMBER | TRADE SIZE | ATTACHMENT MEANS |
| MCS200 | 2" | 1/2" X 10" Threaded Rod |
| MCS200L | 2" | Lag Screw |
| MCS200U | 2" | None |
| MCS250 | 2-1/2" | 1/2" X 10" Threaded Rod |
| MCS250L | 2-1/2" | Lag Screw |
| MCS250U | 2-1/2" | None |
| MCS300 | 3" | 5/8" X 14" Threaded Rod |
| MCS300U | 3" | None |
| MCS350 | 3-1/2" | 5/8" X 14" Threaded Rod |
| MCS350U | 3-1/2" | None |
| MCS400 | 4" | 5/8" X 14" Threaded Rod |
| MCS400U | 4" | None |



Beam Clamps

Application

Used to attach electrical hardware to steel structures

- Assembled with square head bolt
- Cast from high strength iron/ductile iron and zinc plated

Standards

- UL 2239
- CSA C22.2 No. 18


Certifications



| BEAM CLAMPS | | | | | |
|----------------|-------------|----------------|---------------|-----------|----------------------|
| CATALOG NUMBER | JAW OPENING | BEAM THICKNESS | THREADED HOLE | BOLT SIZE | MAXIMUM LOAD RATING* |
| MB1A | 13/16" | 1/8" - 1/2" | 10-24 | 5/16-18 | 120 lbs |
| MB1AS** | 13/16" | 1/8" - 1/2" | 10-24 | 5/16-18 | 300 lbs |
| MB1 | 13/16" | 1/8" - 1/2" | 1/4-20 | 5/16-18 | 120 lbs |
| MB1S** | 13/16" | 1/8" - 1/2" | 1/4-20 | 5/16-18 | 300 lbs |
| MB1B | 13/16" | 1/8" - 1/2" | 3/8-16 | 5/16-18 | 120 lbs |
| MB1BS** | 13/16" | 1/8" - 1/2" | 3/8-16 | 5/16-18 | 300 lbs |
| MB2 | 7/8" | 1/8" - 1/2" | 5/16-18 | 3/8-16 | 300 lbs |
| MB3 | 1-1/8" | 1/8" - 1/2" | 3/8-16 | 1/2-13 | 300 lbs |
| BMB3 | 7/8" | 1/8" - 1/2" | 3/8-16 | 3/8-16 | 300 lbs |
| MB4 | 31/32" | 1/8" - 3/4" | 1/2-13 | 5/8-11 | 600 lbs |
| BMB4 | 1-3/16" | 1/2" - 3/4" | 1/2-13 | 3/8-16 | 600 lbs |

*- UL load rating is 1/3 of maximum static load

** MB1AS , MB1S , MB1BS are cULus listed



J Clamps

Application

Used to attach rigid conduit, IMC, or EMT to steel structures

- Assembled with square head bolt
- Cast from high strength iron/ductile iron and zinc plated

| J CLAMPS | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| MJ050 | 1/2" |
| MJ075 | 3/4" |
| MJ100 | 1" |



Knockout Seal

Application

Knockout seals are used to close exposed holes in an outlet box or metal enclosure.

- Zinc plated steel.

| KNOCKOUT SEAL | |
|----------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| KOS050 | 1/2" |
| KOS075 | 3/4" |
| KOS100 | 1" |
| KOS125 | 1-1/4" |
| KOS150 | 1-1/2" |
| KOS200 | 2" |



Nail Plate

Application

Safety nail plates are used to protect cable insulation from nail punctures in wooden structures.

- Zinc-Plated Steel

Certifications



| NAIL PLATE | |
|----------------|-------------|
| CATALOG NUMBER | TRADE SIZE |
| NP01 | 1.5" X 2.5" |
| NP02 | 1.5" X 5" |



Cord Grip Non-metallic Connector Without Mesh Black Color

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOW, SOOW, STOOW, SJTOOW and SVO cords
- Plastic fittings
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



**CORD GRIP NON-METALLIC CONNECTOR
WITHOUT MESH BLACK COLOR**

| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
|----------------|------------|-----------------|
| CNS509B | 1/2" | 0.250" - 0.312" |
| CNS5011B | 1/2" | 0.312" - 0.375" |
| CNS5012B | 1/2" | 0.375" - 0.437" |
| CNS5013B | 1/2" | 0.437" - 0.500" |
| CNS5015B | 1/2" | 0.500" - 0.562" |
| CNS757B | 3/4" | 0.187" - 0.250" |
| CNS7510B | 3/4" | 0.250" - 0.375" |
| CNS7512B | 3/4" | 0.375" - 0.437" |
| CNS7514B | 3/4" | 0.437" - 0.562" |
| CNS7516B | 3/4" | 0.500" - 0.625" |
| CNS7518B | 3/4" | 0.562" - 0.687" |
| CNS7519B | 3/4" | 0.625" - 0.750" |
| CNS10019B | 1" | 0.625" - 0.750" |
| CNS10020B | 1" | 0.687" - 0.812" |
| CNS10021B | 1" | 0.750" - 0.875" |
| CNS10022B | 1" | 0.812" - 0.937" |
| CNS10023B | 1" | 0.875" - 1.000" |



UF Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with UF cords
- Plastic fittings
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



UF CONNECTOR

| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
|----------------|-------------|-------------|
| Straight | 90° Angular | |
| CNS501UF | CNA501UF | 1/2" |
| CNS502UF | CNA502UF | 1/2" |
| CNS751UF | CNA751UF | 3/4" |
| CNS752UF | CNA752UF | 3/4" |



Cord Grip Non-metallic Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOOOW, SOOW, STOOOW, SJTOOW and SVO cords
- Plastic fittings with stainless steel single/double weave mesh
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| CORD GRIP NON-METALLIC CONNECTOR WITH METALIC MESH | | | |
|--|-------------|------------|-----------------|
| CATALOG NUMBER | | TRADE SIZE | CABLE RANGE |
| Straight | 90° Angular | | |
| CNS507M | CNA507M | 1/2" | 0.187" - 0.250" |
| CNS509M | CNA509M | 1/2" | 0.250" - 0.312" |
| CNS5011M | CNA5011M | 1/2" | 0.312" - 0.375" |
| CNS5012M | CNA5012M | 1/2" | 0.375" - 0.437" |
| CNS5013M | CNA5013M | 1/2" | 0.437" - 0.500" |
| CNS5015M | CNA5015M | 1/2" | 0.500" - 0.562" |
| CNS5017M | CNA5017M | 1/2" | 0.562" - 0.625" |
| CNS757M | - | 3/4" | 0.187" - 0.250" |
| CNS7510M | CNA7510M | 3/4" | 0.250" - 0.375" |
| CNS7512M | CNA7512M | 3/4" | 0.375" - 0.437" |
| CNS7514M | CNA7514M | 3/4" | 0.437" - 0.562" |
| CNS7516M | CNA7516M | 3/4" | 0.500" - 0.625" |
| CNS7518M | CNA7518M | 3/4" | 0.562" - 0.687" |
| CNS7519M | CNA7519M | 3/4" | 0.625" - 0.750" |
| CNS7520M | CNA7520M | 3/4" | 0.687" - 0.812" |
| CNS10014M | - | 1" | 0.437" - 0.562" |
| CNS10016M | - | 1" | 0.500" - 0.625" |
| CNS10018M | CNA10018M | 1" | 0.562" - 0.687" |
| CNS10019M | CNA10019M | 1" | 0.625" - 0.750" |
| CNS10020M | CNA10020M | 1" | 0.687" - 0.812" |
| CNS10021M | CNA10021M | 1" | 0.750" - 0.875" |
| CNS10022M | - | 1" | 0.812" - 0.937" |
| CNS10023M | CNA10023M | 1" | 0.875" - 1.000" |



Straight



90° Angular

Cord Grip Non-metallic Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOOOW, SOOW, STOOOW, SJTOOW and SVO cords
- Plastic fittings with plastic single/double weave mesh
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| CORD GRIP NON-METALLIC CONNECTOR WITH NYLON MESH | | | |
|--|-------------|------------|-----------------|
| CATALOG NUMBER | | TRADE SIZE | CABLE RANGE |
| Straight | 45° Angular | | |
| CNS507N | CNA507N | 1/2" | 0.187" - 0.250" |
| CNS509N | CNA509N | 1/2" | 0.250" - 0.312" |
| CNS5011N | CNA5011N | 1/2" | 0.312" - 0.375" |
| CNS5012N | CNA5012N | 1/2" | 0.375" - 0.437" |
| CNS5013N | CNA5013N | 1/2" | 0.437" - 0.500" |
| CNS757N | - | 3/4" | 0.187" - 0.250" |
| CNS7510N | CNA7510N | 3/4" | 0.250" - 0.375" |
| CNS7512N | CNA7512N | 3/4" | 0.375" - 0.437" |
| CNS7514N | CNA7514N | 3/4" | 0.437" - 0.562" |
| CNS7516N | CNA7516N | 3/4" | 0.500" - 0.625" |
| CNS7518N | CNA7518N | 3/4" | 0.562" - 0.687" |
| CNS7519N | CNA7519N | 3/4" | 0.625" - 0.750" |
| CNS10014N | CNA10014N | 1" | 0.437" - 0.562" |
| CNS10016N | CNA10016N | 1" | 0.500" - 0.625" |
| CNS10018N | - | 1" | 0.562" - 0.687" |
| CNS10019N | CNA10019N | 1" | 0.625" - 0.750" |
| CNS10020N | CNA10020N | 1" | 0.687" - 0.812" |
| CNS10021N | CNA10021N | 1" | 0.750" - 0.875" |
| CNS10022N | - | 1" | 0.812" - 0.937" |
| CNS10023N | CNA10023N | 1" | 0.875" - 1.000" |



Straight



90° Angular

Cord Grip Non-metallic Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOOOW, SOOW, STOOOW, SJTOOW and SVO cords
- Plastic fittings
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



CORD GRIP NON-METALLIC CONNECTOR WITHOUT MESH

| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
|----------------|-------------|------------------------|
| Straight | 90° Angular | |
| CNS254 | -- | 1/4" 0.075" - 0.135" |
| CNS256 | -- | 1/4" 0.135" - 0.200" |
| CNS258 | -- | 1/4" 0.200" - 0.265" |
| CNS375 | CNA375 | 3/8" 0.125" - 0.187" |
| CNS377 | CNA377 | 3/8" 0.187" - 0.250" |
| CNS379 | CNA379 | 3/8" 0.250" - 0.312" |
| CNS3711 | CNA3711 | 3/8" 0.312" - 0.375" |
| CNS3712 | CNA3712 | 3/8" 0.375" - 0.437" |
| CNS503 | CNA503 | 3/8" 0.062" - 0.125" |
| CNS505 | CNA505 | 3/8" 0.125" - 0.187" |
| CNS507 | CNA507 | 3/8" 0.187" - 0.250" |
| CNS509 | CNA509 | 3/8" 0.250" - 0.312" |
| CNS5011 | CNA5011 | 1/2" 0.312" - 0.375" |
| CNS5012 | CNA5012 | 1/2" 0.375" - 0.437" |
| CNS5013 | CNA5013 | 1/2" 0.437" - 0.500" |
| CNS5015 | CNA5015 | 1/2" 0.500" - 0.562" |
| CNS5017 | CNA5017 | 1/2" 0.562" - 0.625" |
| CNS757 | CNA757 | 3/4" 0.187" - 0.250" |
| CNS7510 | CNA7510 | 3/4" 0.250" - 0.375" |
| CNS7512 | CNA7512 | 3/4" 0.375" - 0.437" |
| CNS7514 | CNA7514 | 3/4" 0.437" - 0.562" |
| CNS7516 | CNA7516 | 3/4" 0.500" - 0.625" |
| CNS7518 | CNA7518 | 3/4" 0.562" - 0.687" |
| CNS7519 | CNA7519 | 3/4" 0.625" - 0.750" |
| CNS7520 | CNA7520 | 3/4" 0.687" - 0.812" |
| CNS10014 | CNA10014 | 1" 0.437" - 0.562" |
| CNS10016 | CNA10016 | 1" 0.500" - 0.625" |
| CNS10018 | CNA10018 | 1" 0.562" - 0.687" |
| CNS10019 | CNA10019 | 1" 0.625" - 0.750" |
| CNS10020 | CNA10020 | 1" 0.687" - 0.812" |
| CNS10021 | CNA10021 | 1" 0.750" - 0.875" |
| CNS10022 | CNA10022 | 1" 0.812" - 0.937" |
| CNS10023 | CNA10023 | 1" 0.875" - 1.000" |
| CNS10024 | CNA10024 | 1" 1.000" - 1.125" |
| CNS12521 | CNA12521 | 1 1/4" 0.750" - 0.875" |
| CNS12523 | CNA12523 | 1 1/4" 0.875" - 1.000" |
| CNS12524 | CNA12524 | 1 1/4" 1.000" - 1.125" |
| CNS12525 | CNA12525 | 1 1/4" 1.125" - 1.250" |
| CNS12526 | CNA12526 | 1 1/4" 1.250" - 1.355" |



Straight



90° Angular

Cord Grip Connectors

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO and SVO cords
- Die-cast from high strength zinc alloy
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E121487

 174008

| CORD GRIP CONNECTORS | | |
|----------------------|------------|-----------------|
| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
| CGC0501 | 1/2" | 0.260" |
| CGC0502 | 1/2" | 0.260" - 0.375" |
| CGC0503 | 1/2" | 0.375" - 0.500" |
| CGC0751 | 3/4" | 0.440" - 0.500" |
| CGC0752 | 3/4" | 0.500" - 0.625" |
| CGC0753 | 3/4" | 0.625" - 0.750" |
| CGC1001 | 1" | 0.375" - 0.500" |
| CGC1002 | 1" | 0.500" - 0.625" |
| CGC1003 | 1" | 0.625" - 0.750" |
| CGC1004 | 1" | 0.750" - 0.880" |
| CGC1005 | 1" | 0.880" - 0.985" |



Strain Relief Box Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOOOW, SOOW, STOOOW, SJTOOW and SVO cords
- Zinc die-cast fittings with galvanized steel single weave mesh
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

 E121487

 174008

| STRAIN RELIEF BOX CONNECTOR | | |
|-----------------------------|------------|-------------|
| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
| DC05022I | 1/2" | 0.22-0.32" |
| DC05030I | 1/2" | 0.30-0.43" |
| DC05040I | 1/2" | 0.40-0.54" |
| DC07552I | 3/4" | 0.52-0.73" |
| DC10070I | 1" | 0.70-0.97" |
| DC12594I | 1-1/4" | 0.94-1.25" |
| DC150120I | 1-1/2" | 1.20-1.50" |
| DC200140I | 2" | 1.40-1.75" |

*- Product with I suffix includes insulator



Angular Cord Grip AL Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOWW, SOOW, STOWW, SJTOOW and SVO cords
- Aluminum fittings with stainless steel single/double weave mesh
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| Angular Cord grip AL Connector | | | |
|--------------------------------|-------------|------------|-----------------|
| CATALOG NUMBER | | TRADE SIZE | CABLE RANGE |
| 90° Angular | 45° Angular | | |
| CGA5025M | CGY5025M | 1/2" | 0.187" - 0.250" |
| CGA501M | CGY501M | 1/2" | 0.250" - 0.375" |
| CGA502M | CGY502M | 1/2" | 0.375" - 0.500" |
| - | CGY503M | 1/2" | 0.500" - 0.550" |
| CGA504M | CGY504M | 1/2" | 0.500" - 0.625" |
| - | CGY7525M | 3/4" | 0.187" - 0.250" |
| CGA751M | CGY751M | 3/4" | 0.250" - 0.375" |
| CGA752M | CGY752M | 3/4" | 0.375" - 0.500" |
| - | CGY753M | 3/4" | 0.500" - 0.550" |
| CGA754M | CGY754M | 3/4" | 0.500" - 0.625" |
| CGA755M | CGY755M | 3/4" | 0.625" - 0.750" |
| CGA1002M | CGY1002M | 1" | 0.375" - 0.500" |
| CGA1004M | CGY1004M | 1" | 0.500" - 0.625" |
| CGA1005M | CGY1005M | 1" | 0.625" - 0.750" |
| CGA1006M | CGY1006M | 1" | 0.750" - 0.875" |
| CGA1007M | CGY1007M | 1" | 0.875" - 1.000" |
| CGA1256M | CGY1256M | 1-1/4" | 0.750" - 0.875" |
| CGA1257M | CGY1257M | 1-1/4" | 0.875" - 1.000" |
| CGA1258M | CGY1258M | 1-1/4" | 1.000" - 1.125" |
| CGA1259M | CGY1259M | 1-1/4" | 1.125" - 1.250" |
| CGA12510M | CGY12510M | 1-1/4" | 1.250" - 1.375" |
| CGA1506M | CGY1506M | 1-1/2" | 0.750" - 0.875" |
| CGA1507M | CGY1507M | 1-1/2" | 0.875" - 1.000" |
| CGA1508M | CGY1508M | 1-1/2" | 1.000" - 1.125" |
| CGA1509M | CGY1509M | 1-1/2" | 1.125" - 1.250" |
| CGA15010M | CGY15010M | 1-1/2" | 1.250" - 1.375" |
| CGA20010M | - | 2" | 1.250" - 1.375" |
| CGA20011M | - | 2" | 1.312" - 1.437" |
| CGA20012M | - | 2" | 1.437" - 1.562" |
| CGA20013M | - | 2" | 1.562" - 1.687" |
| CGA20014M | - | 2" | 1.687" - 1.812" |
| CGA20015M | - | 2" | 1.750" - 1.875" |



90° Angular



45° Angular

Cord Grip Al Straight Connector

Application


Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOW, SOOW, STOW, SJTOOW and SVO cords
- Aluminum fittings with stainless steel single/double weave mesh
- Rubber grommet provides water-tight seal


Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications

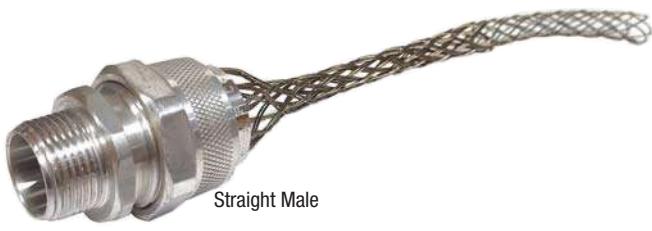

Straight Male

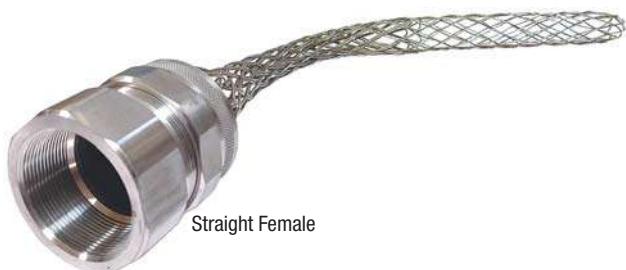

Straight Female

| CORD GRIP AL STRAIGHT CONNECTOR | | | |
|---------------------------------|-----------------|------------|-----------------|
| CATALOG NUMBER | | TRADE SIZE | CABLE RANGE |
| Straight Male | Straight Female | 3/8" | 0.187" - 0.250" |
| CGS3725M | CGS3725FM | 3/8" | 0.250" - 0.312" |
| CGS3726M | CGS3726FM | 3/8" | 0.250" - 0.375" |
| CGS3727M | CGS3727FM | 3/8" | 0.250" - 0.437" |
| CGS3728M | CGS3728FM | 3/8" | 0.187" - 0.250" |
| CGS5025M | CGS5025FM | 1/2" | 0.250" - 0.375" |
| CGS501M | CGS501FM | 1/2" | 0.375" - 0.500" |
| CGS502M | CGS502FM | 1/2" | 0.560" - 0.625" |
| CGS504M | CGS504FM | 1/2" | 0.625" - 0.750" |
| CGS505M | - | 1/2" | 0.750" - 0.875" |
| CGS506M | - | 3/4" | 0.187" - 0.250" |
| CGS7525M | - | 3/4" | 0.250" - 0.375" |
| CGS751M | CGS751FM | 3/4" | 0.375" - 0.500" |
| CGS752M | CGS752FM | 3/4" | 0.500" - 0.625" |
| CGS754M | CGS754FM | 3/4" | 0.625" - 0.750" |
| CGS755M | CGS755FM | 3/4" | 0.750" - 0.875" |
| CGS756M | - | 3/4" | 0.375" - 0.500" |
| CGS1002M | CGS1002FM | 1" | 0.625" - 0.750" |
| CGS1004M | CGS1004FM | 1" | 0.750" - 0.875" |
| CGS1005M | - | 1" | 0.875" - 1.000" |
| CGS1256M | CGS1256FM | 1-1/4" | 0.750" - 0.875" |
| CGS1257M | CGS1257FM | 1-1/4" | 0.875" - 1.000" |
| CGS1258M | CGS1258FM | 1-1/4" | 1.000" - 1.125" |
| CGS1259M | - | 1-1/4" | 1.125" - 1.250" |
| CGS12510M | - | 1-1/4" | 1.250" - 1.375" |
| CGS1506M | CGS1506FM | 1-1/2" | 0.750" - 0.875" |
| CGS1507M | CGS1507FM | 1-1/2" | 0.875" - 1.000" |
| CGS1508M | CGS1508FM | 1-1/2" | 1.000" - 1.125" |
| CGS1509M | CGS1509FM | 1-1/2" | 1.125" - 1.250" |
| CGS15010M | CGS15010FM | 1-1/2" | 1.250" - 1.375" |
| CGS15011M | - | 1-1/2" | 1.312"-1.437" |
| CGS20010M | CGS20010FM | 2" | 1.250" - 1.375" |
| CGS20011M | - | 2" | 1.312" - 1.437" |
| CGS20012M | CGS20012FM | 2" | 1.437" - 1.562" |
| CGS20013M | CGS20013FM | 2" | 1.562" - 1.687" |
| CGS20014M | CGS20014FM | 2" | 1.687" - 1.812" |
| CGS20015M | CGS20015FM | 2" | 1.750" - 1.875" |
| CGS20016M | - | 2" | 1.812" - 1.937" |
| CGS20017M | - | 2" | 1.937" - 2.062" |
| CGS20018M | - | 2" | 2.062" - 2.187" |
| CGS20019M | - | 2" | 2.187" - 2.312" |
| CGS20020M | - | 2" | 2.312" - 2.437" |
| CGS25014M | - | 2-1/2" | 1.687" - 1.812" |
| CGS25016M | - | 2-1/2" | 1.812" - 1.937" |
| CGS25017M | - | 2-1/2" | 1.937" - 2.062" |
| CGS25018M | - | 2-1/2" | 2.062" - 2.187" |
| CGS25019M | - | 2-1/2" | 2.187" - 2.312" |
| CGS25020M | - | 2-1/2" | 2.312" - 2.437" |
| CGS30014M | - | 3" | 1.687" - 1.812" |
| CGS30016M | - | 3" | 1.812" - 1.937" |
| CGS30017M | - | 3" | 1.937" - 2.062" |
| CGS30018M | - | 3" | 2.062" - 2.187" |
| CGS30019M | - | 3" | 2.187" - 2.312" |
| CGS30020M | - | 3" | 2.312" - 2.437" |
| CGS30021M | - | 3" | 2.437" - 2.625" |
| CGS30022M | - | 3" | 2.625" - 2.812" |
| CGS30023M | - | 3" | 2.812" - 3.000" |
| CGS30024M | - | 3" | 3.000" - 3.250" |

Water Tight Connector

Application

Used to seal, provide strain relief and terminate portable or flexible cords to metal enclosure or box

- Suitable for use with S, SO, ST, STO, SJ, SJT, SJTO, SJOOW, SOOW, STOOW, SJTOOW and SVO cords
- Yellow Plastic fittings with stainless steel or plastic single/double weave mesh
- Rubber grommet provides water-tight seal

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| WATER TIGHT CONNECTOR | | |
|-----------------------|------------|-------------|
| CATALOG NUMBER | TRADE SIZE | CABLE RANGE |
| Stainless Steel Mesh | Nylon Mesh | |
| W5011M | -- | 1/2" |
| W5012M | -- | 1/2" |
| W5013M | -- | 1/2" |
| W5015M | -- | 1/2" |
| W5017M | -- | 1/2" |
| W7512M | -- | 3/4" |
| W7514M | W7514N | 3/4" |
| W7516M | W7516N | 3/4" |
| W7518M | -- | 3/4" |
| W7519M | -- | 3/4" |
| W7520M | -- | 3/4" |
| W10018M | -- | 1" |
| W10019M | W10019N | 1" |
| W10021M | W10021N | 1" |
| W10022M | -- | 1" |
| W10023M | W10023N | 1" |



One Gang Boxes

Application

May be used as a weatherproof junction box or as a housing for electrical devices in wet, damp or dry locations

- Rugged, seamless die-cast construction prevents moisture penetration
- Tapered internal NPT threaded hubs comply with NEMA requirements and accept threaded conduit fittings or threaded conduits for a secure installation
- Powder coated for maximum corrosion resistance
- Closure plugs, ground screws and mounting lugs included
- Available in bulk or custom shrink wrapped packaging

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications

 E121488

 LR57925

 E121488 - 21054 & 21074



11053, 11073
& 11103



21053, 21073
& 21103



11054 &
11074



11055 &
11075



31055, 31075
& 31105



41055, 41075
& 41105



21054 & 21074

1/2" OUTLETS, ONE GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|--------|--------------|--------|----------|
| 11053G1 | Gray | 18.3 | 2" | (3) 1/2" |
| 11053W1 | White | 18.3 | 2" | (3) 1/2" |
| 11053A1 | Bronze | 18.3 | 2" | (3) 1/2" |
| 11053B1 | Black | 18.3 | 2" | (3) 1/2" |
| 21053G1 | Gray | 25.5 | 2-5/8" | (3) 1/2" |
| 21053W1 | White | 25.5 | 2-5/8" | (3) 1/2" |
| 21053A1 | Bronze | 25.5 | 2-5/8" | (3) 1/2" |
| 21054G1 | Gray | 23.8 | 2-5/8" | (4) 1/2" |
| 21054W1 | White | 23.8 | 2-5/8" | (4) 1/2" |
| 21054A1 | Bronze | 23.8 | 2-5/8" | (4) 1/2" |
| 11054G1 | Gray | 17.00 | 2" | (4) 1/2" |
| 11054W1 | White | 17.00 | 2" | (4) 1/2" |
| 11054A1 | Bronze | 17.00 | 2" | (4) 1/2" |
| 11055G1 | Gray | 18.3 | 2" | (5) 1/2" |
| 11055W1 | White | 18.3 | 2" | (5) 1/2" |
| 11055A1 | Bronze | 18.3 | 2" | (5) 1/2" |
| 31055G1 | Gray | 18.3 | 2" | (5) 1/2" |
| 31055W1 | White | 18.3 | 2" | (5) 1/2" |
| 31055A1 | Bronze | 18.3 | 2" | (5) 1/2" |
| 31055B1 | Black | 18.3 | 2" | (5) 1/2" |
| 41055G1 | Gray | 25.00 | 2-5/8" | (5) 1/2" |

3/4" OUTLETS, ONE GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|--------|--------------|--------|----------|
| 11073G1 | Gray | 18.3 | 2" | (3) 3/4" |
| 11073W1 | White | 18.3 | 2" | (3) 3/4" |
| 11073A1 | Bronze | 18.3 | 2" | (3) 3/4" |
| 21073G1 | Gray | 25.5 | 2-5/8" | (3) 3/4" |
| 21073W1 | White | 25.5 | 2-5/8" | (3) 3/4" |
| 21073A1 | Bronze | 25.5 | 2-5/8" | (3) 3/4" |
| 21074G1 | Gray | 23.8 | 2-5/8" | (4) 3/4" |
| 21074W1 | White | 23.8 | 2-5/8" | (4) 3/4" |
| 21074A1 | Bronze | 23.8 | 2-5/8" | (4) 3/4" |
| 11074G1 | Gray | 18.3 | 2" | (4) 3/4" |
| 11074W1 | White | 18.3 | 2" | (4) 3/4" |
| 11074A1 | Bronze | 18.3 | 2" | (4) 3/4" |
| 11075G1 | Gray | 17 | 2" | (5) 3/4" |
| 11075W1 | White | 17 | 2" | (5) 3/4" |
| 11075A1 | Bronze | 17 | 2" | (5) 3/4" |
| 31075G1 | Gray | 18.3 | 2" | (5) 3/4" |
| 41075G1 | Gray | 25.0 | 2-5/8" | (5) 3/4" |

1" OUTLETS, ONE GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|-------|--------------|--------|---------|
| 11103G1 | Gray | 17.7 | 2" | (3) 1" |
| 21103G1 | Gray | 23 | 2-5/8" | (3) 1" |
| 31105G1 | Gray | 16.70 | 2" | (5) 1" |
| 41105G1 | Gray | 23 | 2-5/8" | (5) 1" |

Two Gang Boxes

Application

May be used as a weatherproof junction box or as a housing for electrical devices in wet, damp or dry locations

- Rugged, seamless die-cast construction prevents moisture penetration
- Tapered internal NPT threaded hubs comply with NEMA requirements and accept threaded conduit fittings or threaded conduits for a secure installation
- Powder coated for maximum corrosion resistance
- Closure plugs, ground screws and mounting lugs included
- Available in bulk or custom shrink wrapped packaging

1/2" OUTLETS, TWO GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|--------|--------------|--------|----------|
| 12053G1 | Gray | 31.0 | 2" | (3) 1/2" |
| 12053W1 | White | 31.0 | 2" | (3) 1/2" |
| 12053A1 | Bronze | 31.0 | 2" | (3) 1/2" |
| 12054G1 | Gray | 31.0 | 2" | (4) 1/2" |
| 12054W1 | White | 31.0 | 2" | (4) 1/2" |
| 12054A1 | Bronze | 31.0 | 2" | (4) 1/2" |
| 12055G1 | Gray | 31.0 | 2" | (5) 1/2" |
| 12055W1 | White | 31.0 | 2" | (5) 1/2" |
| 12055A1 | Bronze | 31.0 | 2" | (5) 1/2" |
| 32055G1 | Gray | 31.0 | 2" | (5) 1/2" |
| 22055G1 | Gray | 36.0 | 2-5/8" | (5) 1/2" |
| 12056G1 | Gray | 31.0 | 2" | (6) 1/2" |
| 32056G1 | Gray | 31.0 | 2" | (6) 1/2" |
| 12057G1 | Gray | 30.3 | 2" | (7) 1/2" |
| 32057G1 | Gray | 31.0 | 2" | (7) 1/2" |
| 32057A1 | Bronze | 31.0 | 2" | (7) 1/2" |
| 42057G1 | Gray | 36.0 | 2-5/8" | (7) 1/2" |

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



E121488



LR57925



12053, 12073 & 12103



12055 & 12075



12054 & 12074



32055, 32075 & 32105



22055, 22075 & 22105



32056 & 32076



32057 & 32077



42057, 42077 & 42107

3/4" OUTLETS, TWO GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|--------|--------------|--------|----------|
| 12073G1 | Gray | 31.0 | 2" | (3) 3/4" |
| 12074G1 | Gray | 31.0 | 2" | (4) 3/4" |
| 12074W1 | White | 31.0 | 2" | (4) 3/4" |
| 12074A1 | Bronze | 31.0 | 2" | (4) 3/4" |
| 12075G1 | Gray | 31.0 | 2" | (5) 3/4" |
| 32075G1 | Gray | 31.0 | 2" | (5) 3/4" |
| 22075G1 | Gray | 36.0 | 2-5/8" | (5) 3/4" |
| 32076G1 | Gray | 30.3 | 2" | (6) 3/4" |
| 12077G1 | Gray | 30.2 | 2" | (7) 3/4" |
| 32077G1 | Gray | 30.3 | 2" | (7) 3/4" |
| 42077G1 | Gray | 36.0 | 2-5/8" | (7) 3/4" |

1" OUTLETS, TWO GANG BOXES

| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
|----------------|--------|--------------|--------|---------|
| 12103G1 | Gray | 31.0 | 2" | (3) 1" |
| 12103W1 | White | 31.0 | 2" | (3) 1" |
| 12103A1 | Bronze | 31.0 | 2" | (3) 1" |
| 32105G1 | Gray | 31.0 | 2" | (5) 1" |
| 22105G1 | Gray | 36.0 | 2-5/8" | (5) 1" |
| 42107G1 | Gray | 36.0 | 2-5/8" | (7) 1" |

Three Gang & Round Boxes

Application


May be used as a weatherproof junction box or as a housing for electrical devices in wet, damp or dry locations

- Rugged, seamless die-cast construction prevents moisture penetration
- Tapered internal NPT threaded hubs comply with NEMA requirements and accept threaded conduit fittings or threaded conduits for a secure installation
- Powder coated for maximum corrosion resistance
- Closure plugs, ground screws and mounting lugs included
- Available in bulk or custom shrink wrapped packaging

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



E121488



LR57925

| THREE GANG BOXES | | | | |
|------------------|-------|--------------|-------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| 13077G1 | Gray | 55.0 | 2" | (7) 3/4" |
| 13107G1 | Gray | 55.0 | 2" | (7) 1" |

| ROUND BOXES | | | | |
|----------------|--------|--------------|--------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| 71055G1 | Gray | 16.0 | 1-1/2" | (5) 1/2" |
| 71055W1 | White | 16.0 | 1-1/2" | (5) 1/2" |
| 71055A1 | Bronze | 16.0 | 1-1/2" | (5) 1/2" |
| 71055B1 | Black | 16.0 | 1-1/2" | (5) 1/2" |
| 71075G1 | Gray | 16.0 | 1-1/2" | (5) 3/4" |
| 71075W1 | White | 16.0 | 1-1/2" | (5) 3/4" |
| 71075A1 | Bronze | 16.0 | 1-1/2" | (5) 3/4" |



13077 & 13107



71055 & 71075

Extension Rings

Application


May be used to provide additional capacity for box fill requirements

- Rugged, seamless die-cast construction prevents moisture penetration
- Tapered internal NPT threaded hubs comply with NEMA requirements and accept threaded conduit fittings or threaded conduits for a secure installation
- Powder coated for maximum corrosion resistance
- Closure plugs provided with outlet versions
- Available in bulk or custom shrink wrapped packaging

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



E121488



LR57925



ER1



ER2

EF10504 &
EF10754ER10504 &
ER10754

ER70504 & ER70754



ER10502



ER10506

| ONE GANG | | | | |
|----------------|-----------|--------------|-------|---------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| ER1 | Unpainted | 9.5 | 1" | - |
| ER1G1 | Gray | 9.5 | 1" | - |
| ER1W1 | White | 9.5 | 1" | - |
| ER1A1 | Bronze | 9.5 | 1" | - |

| TWO GANG | | | | |
|----------------|--------|--------------|-------|---------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| ER2G1 | Gray | 16 | 1" | - |
| ER2A1 | Bronze | 16 | 1" | - |

| ONE GANG FLANGED WITH OUTLETS | | | | |
|-------------------------------|--------|--------------|--------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| EF10504G1 | Gray | 12.5 | 1-1/2" | (4) 1/2" |
| EF10504W1 | White | 12.5 | 1-1/2" | (4) 1/2" |
| EF10504A1 | Bronze | 12.5 | 1-1/2" | (4) 1/2" |
| EF10754G1 | Gray | 12.5 | 1-1/2" | (4) 3/4" |
| EF10754W1 | White | 12.5 | 1-1/2" | (4) 3/4" |
| EF10754A1 | Bronze | 12.5 | 1-1/2" | (4) 3/4" |

| ONE GANG WITH OUTLETS | | | | |
|-----------------------|--------|--------------|--------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| ER10502G1 | Gray | 9.5 | 1-1/2" | (2) 1/2" |
| ER10504G1 | Gray | 9.5 | 1-1/2" | (4) 1/2" |
| ER10504W1 | White | 9.5 | 1-1/2" | (4) 1/2" |
| ER10504A1 | Bronze | 9.5 | 1-1/2" | (4) 1/2" |
| ER10506G1 | Gray | 9.5 | 1-1/2" | (6) 1/2" |
| ER10752G1 | Gray | 11 | 1-1/2" | (2) 3/4" |
| ER10754G1 | Gray | 11 | 1-1/2" | (4) 3/4" |
| ER10756G1 | Gray | 11 | 1-1/2" | (6) 3/4" |

| ROUND WITH OUTLETS | | | | |
|--------------------|-----------|--------------|--------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| ER70504G1 | Gray | 16.5 | 1-1/2" | (4) 1/2" |
| ER70504W1 | White | 16.5 | 1-1/2" | (4) 1/2" |
| ER70504A1 | Bronze | 16.5 | 1-1/2" | (4) 1/2" |
| ER70504U | Unpainted | 16.5 | 1-1/2" | (4) 1/2" |
| ER70754G1 | Gray | 16.5 | 1-1/2" | (4) 3/4" |

One Gang Device Covers

Application

- May be used to provide weatherproof protection for an outdoor receptacle
- Rugged, seamless die-cast construction prevents moisture penetration
 - Self-closing lids provide weatherproof assurance when the receptacle is not in use
 - Powder coated for maximum corrosion resistance
 - Includes installation hardware and gasket
 - Available in bulk or custom shrink wrapped packaging

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

 E121488

 LR57925

 E121488 - MC1M2G1, MC1M2W1, MC1M2A1
- MC1M3G1, MC1M3W0, MC1M3A0



| HORIZONTAL CONFIGURATION | | |
|--------------------------|--------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C112G1 | Gray | Duplex |
| C112W1 | White | Duplex |
| C112A1 | Bronze | Duplex |
| C112B1 | Black | Duplex |
| C122G1 | Gray | GFCI |
| C122W1 | White | GFCI |
| C122A1 | Bronze | GFCI |
| C122B1 | Black | GFCI |
| C182G1 | Gray | 1.425" Diameter Outlet |
| C182W1 | White | 1.425" Diameter Outlet |
| C182A1 | Bronze | 1.425" Diameter Outlet |
| MC1M2G1 | Gray | Duplex, GFCI, 1.410" Round |
| MC1M2W1 | White | Duplex, GFCI, 1.410" Round |
| MC1M2A1 | Bronze | Duplex, GFCI, 1.410" Round |

| VERTICAL CONFIGURATION | | |
|------------------------|--------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C111G1 | Gray | Duplex |
| C111W1 | White | Duplex |
| C111A1 | Bronze | Duplex |
| C111B1 | Black | Duplex |
| C121G1 | Gray | GFCI |
| C121W1 | White | GFCI |
| C121A1 | Bronze | GFCI |
| C121B1 | Black | GFCI |
| C131G1 | Gray | Single Receptacle |
| C141G1 | Gray | Toggle Switch |
| C141W1 | White | Toggle Switch |
| C141A1 | Bronze | Toggle Switch |
| C141B1 | Black | Toggle Switch |
| C161G1 | Gray | 2.125" Diameter Outlet |
| C161W1 | White | 2.125" Diameter Outlet |
| C161A1 | Bronze | 2.125" Diameter Outlet |
| C163G1 | Gray | 1.625" Diameter Outlet |
| C164G1 | Gray | 1.75" Diameter Outlet |
| C165G1 | Gray | 1.437" Diameter Outlet |
| C171G1 | Gray | 1.645" Diameter Outlet |
| C181G1 | Gray | 1.425" Diameter Outlet |
| C181W1 | White | 1.425" Diameter Outlet |
| C181A1 | Bronze | 1.425" Diameter Outlet |
| C189G1 | Gray | 1.425" Diameter Outlet |
| MC151G1 | Gray | Switch Cover |
| MC1M1G1 | Gray | Duplex, GFCI, 1.410" Round |
| MC1M1W1 | White | Duplex, GFCI, 1.410" Round |
| MC1M1A1 | Bronze | Duplex, GFCI, 1.410" Round |

| UNIVERSAL CONFIGURATION | | |
|-------------------------|--------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| MC1M3G1 | Gray | Duplex, GFCI, 1.410" Round |
| MC1M3W1 | White | Duplex, GFCI, 1.410" Round |
| MC1M3A1 | Bronze | Duplex, GFCI, 1.410" Round |

Two and Three Gang Device Covers

Application

- May be used to provide weatherproof protection for an outdoor receptacle
- Rugged, seamless die-cast construction prevents moisture penetration
 - Self-closing lids provide weatherproof assurance when the receptacle is not in use
 - Powder coated for maximum corrosion resistance
 - Includes installation hardware and gasket
 - Available in bulk or custom shrink wrapped packaging

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

 E121488

 LR57925

 E121488 - MC2MMG1, MC2MMW1, MC2MMA1



C292



C293



C291



C211



C222



C221



C210



C231



C232



C233



C241




C242



C244



C255

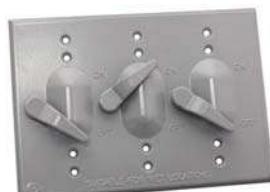

C3444



| TWO GANG FIXED CONFIGURATION | | |
|------------------------------|--------|----------------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C211G1 | Gray | Two Duplex |
| C211W1 | White | Two Duplex |
| C211A1 | Bronze | Two Duplex |
| C222G1 | Gray | Two GFCI |
| C222W1 | White | Two GFCI |
| C222A1 | Bronze | Two GFCI |
| C221G1 | Gray | GFCI and Duplex |
| C221W1 | White | GFCI and Duplex |
| C221A1 | Bronze | GFCI and Duplex |
| C210G1 | Gray | Oversized Single Duplex |
| C210W1 | White | Oversized Single Duplex |
| C210A1 | Bronze | Oversized Single Duplex |
| C231G1 | Gray | Duplex and 1.417" Diameter Round |
| C232G1 | Gray | GFCI and 1.417" Diameter Round |
| C233G1 | Gray | Two 1.417" Diameter Round |
| C233W1 | White | Two 1.417" Diameter Round |
| C233A1 | Bronze | Two 1.417" Diameter Round |
| C241G1 | Gray | Duplex and Lever Switch |
| C242G1 | Gray | GFCI and Lever Switch |
| C244G1 | Gray | Two Lever Switch |
| C244A1 | Bronze | Two Lever Switch |
| C255G1 | Gray | Two Switch Cover |
| C255W1 | White | Two Switch Cover |
| C255A1 | Bronze | Two Switch Cover |
| C291G1 | Gray | Single 2.125" Diameter Round |
| C292G1 | Gray | Single 2.64" Diameter Round |
| C293G1 | Gray | Single 1.75" Diameter Round |

| TWO GANG MULTI-USE | | |
|--------------------|--------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| MC251G1 | Gray | Switch and Duplex Cover |
| MC252G1 | White | Switch and GFCI Cover |
| MC2MMG1 | Gray | Duplex, GFCI, 1.410" Round |
| MC2MMW1 | White | Duplex, GFCI, 1.410" Round |
| MC2MMA1 | Bronze | Duplex, GFCI, 1.410" Round |

| THREE GANG FIXED CONFIGURATION | | |
|--------------------------------|-------|----------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C3444G1 | Gray | Three Lever Switches |

One Gang Blank Covers

Application

One-gang blank covers are used with one-gang, rectangular weatherproof boxes.

Protects boxes not in use.

- Made from stamped steel
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket

ONE GANG BLANK COVERS

| CATALOG NUMBER | COLOR |
|----------------|--------|
| BC1000G1 | Gray |
| BC1000W1 | White |
| BC1000A1 | Bronze |
| BC1000B1 | Black |
| BC1001G1 | Gray |
| BC1002G1 | Gray |
| BC1002W1 | White |
| BC1002A1 | Bronze |
| BC1002B1 | Black |

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



Two Gang Blank Covers

Application

Two-gang blank covers are used with two-gang, square weatherproof boxes.

Protects boxes not in use.

- Made from stamped steel
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket

TWO GANG BLANK COVERS

| CATALOG NUMBER | COLOR |
|----------------|--------|
| BC2000G1 | Gray |
| BC2000W1 | White |
| BC2000A1 | Bronze |



Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



Three Gang Blank Covers

Application

Three-gang blank covers are used with three-gang, rectangular weatherproof boxes. Protects boxes not in use.

- Made from stamped steel
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket

| THREE GANG BLANK COVER | |
|------------------------|-------|
| CATALOG NUMBER | COLOR |
| BC3000G1 | Gray |



Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications




Round Blank Covers

Application

Round blank covers are used with 4" round weatherproof boxes. Protects boxes not in use.

- Made from stamped steel
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket

| ROUND BLANK COVERS | |
|--------------------|--------|
| CATALOG NUMBER | COLOR |
| BC7000G1 | Gray |
| BC7000W1 | White |
| BC7000A1 | Bronze |
| BC7004G1 | Gray |

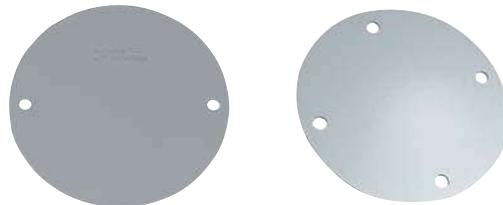

Standards

- UL 514A
- CSA C22.2 No. 18.1-13

Certifications



Rectangular Lamp Holder Covers


Application

For use with rectangular boxes

- Cluster covers provide easy means for mounting lampholders and/or accessories
- Rugged, seamless die-cast construction
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket
- 2 closure plugs included with 2 and 3 hole cluster covers
- Available in bulk or custom shrink wrapped packaging

RECTANGULAR LAMP HOLDER COVERS

| CATALOG NUMBER | COLOR | OUTLETS |
|----------------|--------|----------|
| GC1051G1 | Gray | (1) 1/2" |
| GC1051W1 | White | (1) 1/2" |
| GC1051A1 | Bronze | (1) 1/2" |
| GC1051B1 | Black | (1) 1/2" |
| GC1052G1 | Gray | (2) 1/2" |
| GC1052W1 | White | (2) 1/2" |
| GC1052A1 | Bronze | (2) 1/2" |
| GC1053G1 | Gray | (3) 1/2" |
| GC1053W1 | White | (3) 1/2" |
| GC1053A1 | Bronze | (3) 1/2" |
| GC1053B1 | Black | (3) 1/2" |

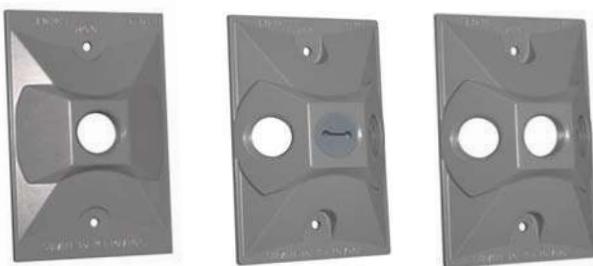

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



Round Lamp Holder Covers

Application

For use with 4" round boxes

- Cluster covers provide easy means for mounting lampholders and/or accessories
- Rugged, seamless die-cast construction
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket
- 2 closure plugs included with 2 and 3 hole cluster covers
- Available in bulk or custom shrink wrapped packaging

ROUND LAMP HOLDER COVERS

| CATALOG NUMBER | COLOR | OUTLETS |
|----------------|-----------|----------|
| GC7051G1 | Gray | (1) 1/2" |
| GC7051W1 | White | (1) 1/2" |
| GC7051A1 | Bronze | (1) 1/2" |
| GC7051B1 | Black | (1) 1/2" |
| GC7051U1 | Unpainted | (1) 1/2" |
| GC7052G1 | Gray | (2) 1/2" |
| GC7052W1 | White | (2) 1/2" |
| GC7052A1 | Bronze | (2) 1/2" |
| GC7052U1 | Unpainted | (2) 1/2" |
| GC7053G1 | Gray | (3) 1/2" |
| GC7053W1 | White | (3) 1/2" |
| GC7053A1 | Bronze | (3) 1/2" |
| GC7053B1 | Black | (3) 1/2" |



Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



One-Gang Horizontal Duplex Cover and Receptacle Kit

Application


Horizontal duplex cover and receptacle kits are used to provide weatherproof protection for the included outdoor duplex receptacle.

- Suitable for wet locations when the covers are closed
- For horizontal mounting
- 15-Amp duplex receptacle included

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



Kit of Rectangular Box, Cover & Duplex Receptacle

Application

Box, Horizontal duplex cover and receptacle kits are used to provide weatherproof protection for the included outdoor duplex receptacle.

- Suitable for wet locations when the covers are closed
- For horizontal mounting
- 15-Amp tamper-resistant, weather-resistant duplex receptacle included

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



ONE-GANG HORIZONTAL DUPLEX COVER AND RECEPTACLE KIT

| CATALOG NUMBER | COLOR | RECEPTACLE |
|----------------|--------|-----------------------------------|
| F112RA1 | Bronze | Duplex |
| F112RB1 | Black | Duplex |
| F112RG1 | Gray | Duplex |
| F112RW1 | White | Duplex |
| F112RWG1 | Gray | Weather & Tamper Resistant Duplex |



KIT OF RECTANGULAR BOX, COVER & DUPLEX RECEPTACLE

| CATALOG NUMBER | COLOR | RECEPTACLE |
|----------------|----------------|------------|
| FB112RA3 | Bronze | Duplex |
| FB112RB3 | Black | Duplex |
| FB112RG3 | Gray | Duplex |
| FB112RN3 | Nickel | Duplex |
| FB112RO3 | ORB semi gloss | Duplex |
| FB112RW3 | White | Duplex |
| FB112TDA3 | Bronze | Duplex |
| FB112TDB3 | Black | Duplex |
| FB112TDG3 | Gray | Duplex |
| FB112TDU3 | Bronze | Duplex |
| FB112TDUG3 | Gray | Duplex |
| FB112TDUW3 | White | Duplex |
| FB112TDW3 | White | Duplex |



Kit of Rectangular Box, Cover & GFI Receptacle

Application

Box, Horizontal GFCI cover and receptacle kits are used to provide weatherproof protection for the included outdoor GFCI receptacle.

- Suitable for wet locations when the covers are closed
- For horizontal / vertical mounting

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



KIT OF RECTANGULAR BOX, COVER & GFI RECEPTACLE

| CATALOG NUMBER | COLOR | RECEPTACLE |
|----------------|--------|------------|
| FB122RA3 | Bronze | GFCI |
| FB122RB3 | Black | GFCI |
| FB122RG3 | Gray | GFCI |
| FB122RUA3 | Bronze | GFCI |
| FB122RUG3 | Gray | GFCI |
| FB122RUW3 | White | GFCI |
| FB122RW3 | White | GFCI |



One Gang Vertical Multi Cover with switch

Application

Vertical multi use covers are used to provide weatherproof protection .

- Suitable for wet locations when the covers are closed

ONE GANG VERTICAL MULTI COVER WITH SWITCH

| CATALOG NUMBER | COLOR | RECEPTACLE |
|----------------|-------|---------------|
| F151S1G1 | Gray | Toggle Switch |



One Gang Horizontal Switch Cover with Plug

Application

Horizontal cover and receptacle kits are used to provide weatherproof protection for the included outdoor receptacle.

- Suitable for wet locations when the covers are closed
- Receptacle included

ONE GANG HORIZONTAL SWITCH COVER WITH PLUG

| CATALOG NUMBER | COLOR | RECEPTACLE |
|----------------|-------|---------------|
| F184MG1 | Gray | FLANGED INLET |



Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



One Gang Toggle Cover with Toggle Switch

Application

Toggle switch kits are used to provide weatherproof protection for the included outdoor switch mounted in a one-gang weatherproof box.

- Toggle switch included per below
- S1 - Single Pole 15A
- S2 - 3 Pole 15A
- S3 - Single Pole 20A
- S4 - Double Pole 20A

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



| ONE GANG TOGGLE COVER WITH TOGGLE SWITCH | | |
|--|--------|---------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| F141S1A1 | Bronze | Toggle Switch |
| F141S1B1 | Black | Toggle Switch |
| F141S1G1 | Gray | Toggle Switch |
| F141S1W1 | White | Toggle Switch |
| F141S2A1 | Bronze | Toggle Switch |
| F141S2G1 | Gray | Toggle Switch |
| F141S2W1 | White | Toggle Switch |
| F141S3A1 | Bronze | Toggle Switch |
| F141S3G1 | Gray | Toggle Switch |
| F141S4G1 | Gray | Toggle Switch |



Two-Gang Toggle Switch Kit

Application

Two-gang toggle switch covers are used to provide weatherproof protection to two outdoor switches mounted in a two-gang weatherproof box.

- 15-Amp single pole toggle switches included
- 15-Amp duplex receptacle included

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



| TWO GANG TOGGLE SWITCH KIT | | |
|----------------------------|-------|-----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| F241S1RG1 | Gray | Toggle Switch & Duplex |
| F241S1RWG1 | Gray | Toggle Switch & TRWR Duplex |



Two-Gang Toggle Switch Kit

Application

Two-gang toggle switch covers are used to provide weatherproof protection to two outdoor switches mounted in a two-gang weatherproof box.

- Toggle switch included per below

S1 - Single Pole 15A

S2 - 3 Pole 15A

S3 - Single Pole 20A

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



| TWO-GANG TOGGLE SWITCH KIT | | |
|----------------------------|-------|---------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| F244S1G1 | Gray | Toggle Switch |
| F244S1PG1 | Gray | Toggle Switch |
| F244S2G1 | Gray | Toggle Switch |
| F244S3G1 | Gray | Toggle Switch |



Three Gang Toggle Cover with Switch

Application

Toggle switch kits are used to provide weatherproof protection for the included outdoor switch mounted in a one-gang weatherproof box.

- 15-Amp toggle switch included

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



| THREE GANG TOGGLE COVER WITH SWITCH | | |
|-------------------------------------|-------|---------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| F3444S1G0 | Gray | Toggle Switch |



Two Gang Switch Cover with Switch

Application

May be used to provide weatherproof protection for an outdoor receptacle

- Rugged, seamless die-cast construction prevents moisture penetration
- Self-closing lids provide weatherproof assurance when the receptacle is not in use
- Powder coated for maximum corrosion resistance
- Includes installation hardware and gasket
- Available in bulk or custom shrink wrapped packaging included
- 15-Amp single pole toggle switches included

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



E324138

| TWO GANG SWITCH COVER WITH SWITCH | | |
|-----------------------------------|-------|---------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| F255S1G1 | Gray | Toggle Switch |



Five Hole Round Box & Round Cover

Application

May be used as a weatherproof junction box or as a housing for electrical devices in wet, damp or dry locations

- Rugged, seamless die-cast construction prevents moisture penetration
- Reinforced connector outlets provide secure installation
- Powder coated for maximum corrosion resistance
- Closure plugs, ground screws and mounting lugs included
- Available in bulk or custom shrink wrapped packaging

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



E121488

| FIVE HOLE ROUND BOX & ROUND COVER | | |
|-----------------------------------|------------|-------|
| CATALOG NUMBER | TRADE SIZE | COLOR |
| ACB705FG1 | 1/2" | Gray |
| ACB707FG1 | 3/4" | Gray |



One-Gang While-In-Use Receptacle Cover

Application

One-gang in-use receptacle covers allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 16 configurations
- Adaptable for GFCI, duplex, round and switch devices
- Lockable
- Powder coated for maximum corrosion resistance
- Rugged, seamless die-cast construction prevents moisture penetration
- Metallic
- Mount vertically or horizontally with the corner hinge

Includes:

- Adaptor plates, pre-installed gasket and hardware

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



174008


ONE-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|--------|-------------|
| WM10MSG1 | Gray | 2-1/4" Deep |
| WM10MSW1 | White | 2-1/4" Deep |
| WM10MSA1 | Bronze | 2-1/4" Deep |
| WM10MDG1 | Gray | 3-1/8" Deep |
| WM10MDW1 | White | 3-1/8" Deep |
| WM10MDA1 | Bronze | 3-1/8" Deep |



16-in-1

Flexibility

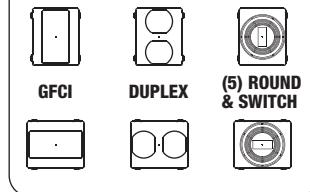

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

Two-Gang While-In-Use Receptacle Cover

Application

Two-gang in-use receptacle covers allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 55 configurations
- Adaptable for GFCI, duplex, round and switch devices
- Lockable
- Powder coated for maximum corrosion resistance
- Rugged, seamless die-cast construction prevents moisture penetration
- Metallic

Includes:

- Adaptor plates, pre-installed gasket and hardware

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



174008


TWO-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|--------|-------------|
| WM21MMDG1 | Gray | 3-1/8" Deep |
| WM21MMDW1 | White | 3-1/8" Deep |
| WM21MMDA1 | Bronze | 3-1/8" Deep |



55-in-1

Flexibility

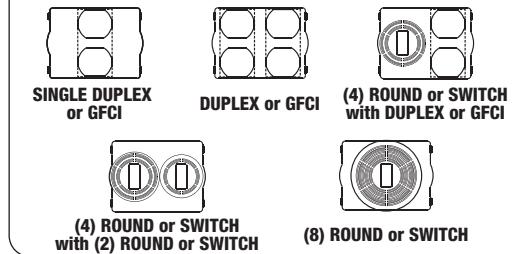

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

One-Gang While-In-Use GFCI Receptacle Kit

Application

One-gang in-use receptacle kits allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 15-Amp tamper-resistant, weather-resistant GFCI receptacle included
- Lockable
- Metallic Cover and Metal Die cast Box
- Mount vertically or horizontally with the corner hinge

Includes:

- One-gang metal box with three 1/2" holes, one-gang while-in-use cover, TRWR GFCI receptacle, closure plugs, adaptor plates, pre-installed gasket and hardware

ONE-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|-------|-------------|
| WMB1S2G3 | Gray | 2-1/4" Deep |




Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

 E324138

 174008

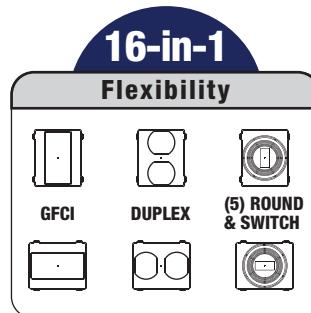

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

Par Lamp Holders

Application

For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers

- Rugged, seamless die-cast construction
- Powder coated for maximum corrosion resistance
- Locking swivel knuckle provides maximum stability and accurate light positioning
- Long wire leads for ease of installation
- Preinstalled porcelain socket and interior gasket
- Includes 1/2" locknut and installation instructions
- Available in bulk or custom shrink wrapped packaging

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications

 E195204- WPH1 / WPH1-K

 LR57925- WPH1 / WPH1-K

 E195204- WPH3/4/5

| LAMP HOLDERS | | |
|----------------|-----------|---------------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| WPH1A1 | Bronze | Lampholder |
| WPH1AK1 | Bronze | Lampholder with gasket |
| WPH1B1 | Black | Lampholder |
| WPH1G1 | Gray | Lampholder |
| WPH1GK1 | Gray | Lampholder with gasket |
| WPH1U0 | Unpainted | Lampholder |
| WPH1W1 | White | Lampholder |
| WPH1WK1 | White | Lampholder with gasket |
| WPH3A0 | Bronze | Contemporary Lampholder |
| WPH3B0 | Black | Contemporary Lampholder |
| WPH3G0 | Gray | Contemporary Lampholder |
| WPH3W0 | White | Contemporary Lampholder |
| WPH4A1 | Bronze | Architectural lampholder |
| WPH4G1 | Gray | Architectural lampholder |
| WPH4W0 | White | Architectural lampholder |
| WPH5A0 | Bronze | Contemporary lampholder (5-1/2" Hood) |
| WPH5B0 | Black | Contemporary lampholder (5-1/2" Hood) |
| WPH5G0 | Gray | Contemporary lampholder (5-1/2" Hood) |
| WPH5W0 | White | Contemporary lampholder (5-1/2" Hood) |



Kit of One Hole Rectangular Cover & One Lampholder

Application

Rectangular cover and lampholder kits are used in conjunction with a rectangular weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



KIT OF ONE HOLE RECTANGULAR COVER & ONE LAMPHOLDER

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|-------------------------------|
| A211A1 | Bronze | KIT OF 1HL REC COV & 1 LH ARB |
| A211G1 | Gray | KIT OF 1HL REC COV & 1 LH GRY |
| A211W1 | White | KIT OF 1HL REC COV & 1 LH WHT |



Kit of Three Hole Rectangular Cover & Two Lampholders

Application

Rectangular cover and lampholder kits are used in conjunction with a rectangular weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



Kit of Three Hole Rectangular Cover & Two Lampholders

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|-------------------------------|
| A212A1 | Bronze | KIT OF 3HL REC COV & 2LH ARBZ |
| A212G1 | Gray | KIT OF 3HL REC COV & 2LH GRY |
| A212W1 | White | KIT OF 3HL REC COV & 2LH WH |



Kit of Rectangular Box, Cover & Two Lampholders

Application

Rectangular cover and lampholder kits are used in conjunction with a rectangular weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



KIT OF RECTANGULAR BOX, COVER & TWO LAMPHOLDERS

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|------------------------------|
| AB212A3 | Bronze | RECT FLOODLIGHT KIT BRZ |
| AB212B3 | Black | RECT FLOODLIGHT KIT BLK |
| AB212G1 | Gray | KIT OF REC BOX COV & 2LH GRY |
| AB212W1 | White | KIT OF REC BOX COV & 2LH WH |



Kit of Rectangular Box, Cover & Three Lampholders

Application

Rectangular cover and lampholder kits are used in conjunction with a rectangular weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



KIT OF RECTANGULAR BOX, COVER & THREE LAMPHOLDERS

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|--------------------------------|
| AB213A1 | Bronze | KIT OF REC BOX COV & 3LH AR BZ |
| AB213W1 | White | KIT OF REC BOX COV & 3LH WHT |



Kit of One Hole Round Cover & One Lampholder

Application


Round cover and lampholder kits are used in conjunction with a 4" round weather-proof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



KIT OF ONE HOLE ROUND COVER & ONE LAMPHOLDER

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|--------------------------------|
| A911A1 | Bronze | KIT OF 1HL RD COV & 1 LH AB |
| A911B2 | Black | KIT OF 1HL RD COV & 1 LH BLACK |
| A911G1 | Gray | KIT OF 1HL RD COV & 1 LH GRY |
| A911W1 | White | KIT OF 1HL RD COV & 1 LH WH |



Kit of Three Hole Round Cover & Two Lampholders

Application

Round cover and lampholder kits are used in conjunction with a 4" round weather-proof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



KIT OF THREE HOLE ROUND COVER & TWO LAMPHOLDERS

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|--------|-------------------------------|
| A912A1 | Bronze | KIT OF 3HL RD COV & 2LH AR BZ |
| A912B2 | Black | KIT OF 1HL RD COV & 2 LH BLK |
| A912G1 | Gray | KIT OF 3HL RD COV & 2LH GRY |
| A912W1 | White | KIT OF 3HL RD COV & 2LH WHT |



Kit Of Round Box, Cover & Two Lampholders

Application

Round cover and lampholder kits are used in conjunction with a 4" round weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| KIT OF ROUND BOX, COVER & TWO LAMPHOLDERS | | |
|---|----------------|--------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| AB912A1 | Bronze | KIT OF ROUND BOX COV & 2LH AR |
| AB912B3 | Black | ROUND FLOODLIGHT KIT BK |
| AB912G1 | Gray | KIT OF ROUND BOX COV & 2LH GRY |
| AB912O1 | ORB semi gloss | KIT OF ROUND BOX COV & 2LH |
| AB912W1 | White | KIT OF ROUND BOX COV & 2LH WH |



Two Lamp Round Box Kit Contemporary

Application

Round cover and lampholder kits are used in conjunction with a 4" round weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| TWO LAMP ROUND BOX KIT CONTEMPORARY | | |
|-------------------------------------|--------|--------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| AB932A1 | Bronze | KIT OF ROUND BOX COV & 2LH AB |
| AB932B0 | Black | KIT OF ROUND BOX COV & 2LH BLK |
| AB932G1 | Gray | 2 LAMP RND BOX KIT CONTEMP SIL |
| AB932W1 | White | KIT OF ROUND BOX COV & 2LH WH |



Swivel Light Kit

Application

Round cover and lampholder kits are used in conjunction with a swivel plate in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| SWIVEL LIGHT KIT | | |
|------------------|--------|------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| A812AO | Bronze | SWIVEL LIGHT KIT AR BZ |
| A812BO | Black | SWIVEL LIGHT KIT BLK |
| A812GO | Gray | SWIVEL LIGHT KIT GRAY |
| A812WO | White | SWIVEL LIGHT KIT WHT |



Kit of Round Box, Cover & Photo Eye

Application

Round cover and lampholder kits, Photoelectric switch are used in conjunction with a 4" round weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| KIT OF ROUND BOX, COVER & PHOTO EYE | | |
|-------------------------------------|-------|--------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| ABE712G3 | Gray | KIT OF RND BX COV & PH EYE GRY |
| ABE712W3 | White | KIT OF RND BX COV & PH EYE WHT |



Kit of Rectangular Box Cover & Photo Eye

Application

Rectangular cover and lampholder kits, Photoelectric switch are used in conjunction with a rectangular weatherproof box in outdoor security or aesthetic lighting applications.

- Adjustable lampholder

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| KIT OF RECTANGULAR BOX COVER & PHOTO EYE | | |
|--|--------|-------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| ABE312A3 | Bronze | SECURITY LIGHT KIT BRONZE |
| ABE312B0 | Black | KIT OF REC BX COV & PH EYE BK |
| ABE312G3 | Gray | SECURITY LIGHT KIT GRY |
| ABE312W3 | White | SECURITY LIGHT KIT WHT |



LED Lights

Application

For outdoor lighting applications, may be installed with weatherproof boxes or cluster covers

- Rugged, seamless die-cast construction
- Powder coated for maximum corrosion resistance
- Adjustable lamp head can be angled in any direction
- Includes installation instructions

| LED LIGHTS | | |
|----------------|--------|------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| WPL8A3 | Bronze | 12 Watt Led Lampholder |
| WPL8G3 | Gray | 12 Watt Led Lampholder |
| WPL8W3 | White | 12 Watt Led Lampholder |
| WPL9A3 | Bronze | 10 Watt Led Lampholder |
| WPL9G3 | Gray | 10 Watt Led Lampholder |
| WPL9W3 | White | 10 Watt Led Lampholder |



Standards

- UL 1598 & UL 8750
- CSA C22.2 No. 250.0-08 & CSA C22.2 No. 250.13

Certifications



Portable Lamp Holders

Application

Simplified installation of ground level outdoor lighting

- Rugged, seamless die-cast construction prevents moisture penetration
- Powder coated for maximum corrosion resistance
- Locking swivel knuckle provides maximum stability and accurate light positioning
- Includes installation instructions
- Available in bulk or custom packaging

| PORTABLE SPIKE-A-LITE™ | | |
|------------------------|-----------|----------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| SL1A | Bronze | Spike-A-Lite™, 6 foot cord |
| SL1B | Black | Spike-A-Lite™, 6 foot cord |
| SL1E | Green | Spike-A-Lite™, 6 foot cord |
| SL1E | Green | Spike-A-Lite™, 6 foot cord |
| SL1G | Gray | Spike-A-Lite™, 6 foot cord |
| SL2A | Bronze | Spike-A-Lite™, 6 foot cord |
| SLL1A | Bronze | 7W LED SPIKELIGHT BRONZE |
| SLL1E | Green | 7W LED SPIKE LIGHT GREEN |
| SLL1G | Gray | 7W LED SPIKE LIGHT GREY |
| SLL1W | White | 7W LED SPIKE LIGHT WHITE |
| SPK2* | Unpainted | Ground stake |

SPK2* is not listed component

Standards

- UL 153
- CSA C22.2 No. 250.4 & CSA C22.2 No. 250.13

Certifications



Kit Of Round Box, Cover & Two LED

Application

Round cover, 4" round weatherproof box and LED kits are used in outdoor security or aesthetic lighting applications.

- Adjustable LED

Standards

- UL 8750
- CSA C22.2 No. 250.0

Certifications



| KIT OF ROUND BOX COV & TWO LED | | |
|--------------------------------|--------|--------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| AB942A1 | Bronze | KIT OF ROUND BOX COV & 2LED AB |
| AB942G1 | Gray | KIT OF ROUND BOX COV & 2LED GR |
| AB942W1 | White | KIT OF ROUND BOX COV & 2LED WH |



Kit Of Round Box, Cover & Two LED

Application

Round cover, 4" round weatherproof box and LED kits are used in outdoor security or aesthetic lighting applications.

- Tool-free adjustable lamp heads
- Long-lasting LED

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



| KIT OF ROUND BOX COV & TWO LED | | |
|--------------------------------|--------|--------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| AB972A1 | Bronze | KIT OF ROUND BOX COV & 2LED AB |
| AB972G1 | Gray | KIT OF ROUND BOX COV & 2LED GR |
| AB972W1 | White | KIT OF ROUND BOX COV & 2LED WH |



Garden Lights

Application

- For accent lighting along walkways or driveways (Max 75W)
- Rugged, seamless die-cast construction prevents moisture penetration
 - Powder coated for maximum corrosion resistance
 - Long wire leads for ease of installation
 - Includes screw-in clear glass globe, 5" for 3-Tier, 7" for 4-Tier lights
 - Available in bulk or custom packaging

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications

 E163827
LISTED

| GARDEN LIGHTING | | |
|-----------------|--------|--|
| CATALOG NUMBER | COLOR | DESCRIPTION |
| GL31AA | Bronze | 3 tier louver light with 5" glass globe |
| GL31AAU | Bronze | 3 tier louver light without glass globe |
| GL31AB | Black | 3 tier louver light with 5" glass globe |
| GL31ABU | Black | 3 tier louver light without glass globe |
| GL31AE | Green | 3 tier louver light with 5" glass globe |
| GL31AEU | Green | 3 tier louver light without glass globe |
| GL31AEUL | Green | 3 tier louver light without glass globe |
| GL31AW | White | 3 tier louver light with 5" glass globe |
| GL31AWU | White | 3 tier louver light without glass globe |
| GL42BA | Bronze | 4 tier louver light with 7" glass globe |
| GL42BAU | Bronze | 4 tier louver light without glass globe |
| GL42BB | Black | 4 tier louver light with 7" glass globe |
| GL42BBU | Black | 4 tier louver light without glass globe |
| GL42BE | Green | 4 tier louver light with 7" glass globe |
| GL42BEU | Green | 4 tier louver light without glass globe |
| GL42BEUL | Green | 4 tier louver light without glass globe |
| GL42BW | White | 4 tier louver light with 7" glass globe |
| GL42BWU | White | 4 tier louver light without glass globe |
| GL42DA | Bronze | 7W 4 tier louver light with 7" glass globe |



GL31B

GL42A

Vaportight Fixtures

Application

- For use in severe service areas where extreme conditions prevail
- Rugged, seamless die-cast construction prevents moisture penetration
 - Powder coated for maximum corrosion resistance
 - All fixtures are industrial grade, factory assembled and fully gasketed
 - Designed to protect light bulb from deteriorating effects of ice, corrosive fumes, non-explosive vapors, etc.
 - Available in bulk or custom packaging



Pendant Mount



Ceiling Mount with Cast Guard

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



CEILING MOUNT

| CATALOG NUMBER | HUB SIZE | WATTAGE | GLOBE |
|----------------|----------|---------|---------------|
| VC901ALC | -- | 75 | Polycarbonate |
| VC901BGC | -- | 100 | Glass |
| VC901BLA | -- | 100 | Polycarbonate |
| VC901BLC | -- | 100 | Polycarbonate |
| VC901BLE | -- | 100 | Polycarbonate |
| VC901 BLL | -- | 100 | Polycarbonate |
| VC901BLR | -- | 100 | Polycarbonate |
| VC901CGC | -- | 200 | Glass |

CEILING MOUNT WITH GLASS GLOBE AND GUARD

| CATALOG NUMBER | HUB SIZE | WATTAGE | GUARD |
|----------------|-------------|---------|-------|
| VC101BGC | -- | 100 | Cast |
| VC201BGC | 3-1/2" & 4" | 100 | Wire |
| VC900BGC | -- | 100 | -- |
| VC101CGC | -- | 200 | Cast |
| VC201CGC | 3-1/2" & 4" | 200 | Wire |
| VC900CGC | -- | 200 | -- |



Ceiling Mount

Box Mount

Wall Mount

| PENDANT MOUNT | | | |
|----------------|----------|---------|---------------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GLOBE |
| VP910ALC | 1/2" | 75 | Polycarbonate |
| VP920ALC | 3/4" | 75 | Polycarbonate |
| VP910AHC | 1/2" | 75 | Polycarbonate |
| VP920AHC | 3/4" | 75 | Polycarbonate |

PENDANT MOUNT WITH GLASS GLOBE AND GUARD

| CATALOG NUMBER | HUB SIZE | WATTAGE | GUARD |
|----------------|----------|---------|-------|
| VP111BGC | 1/2" | 100 | Cast |
| VP121BGC | 3/4" | 100 | Cast |
| VP211BGC | 1/2" | 100 | Wire |
| VP221BGC | 3/4" | 100 | Wire |
| VP911BGC | 1/2" | 100 | -- |
| VP911BLA | 1/2" | 100 | -- |
| VP911BLE | 1/2" | 100 | -- |
| VP911 BLL | 1/2" | 100 | -- |
| VP911BLR | 1/2" | 100 | -- |
| VP921BGC | 3/4" | 100 | -- |
| VP921BLA | 3/4" | 100 | -- |
| VP921BLE | 3/4" | 100 | -- |
| VP921 BLL | 3/4" | 100 | -- |
| VP921BLR | 3/4" | 100 | -- |
| VP211CGC | 1/2" | 200 | Wire |
| VP221CGC | 3/4" | 200 | Wire |
| VP911CGC | 1/2" | 200 | -- |
| VP921CGC | 3/4" | 200 | -- |

BOX MOUNT

| CATALOG NUMBER | HUB SIZE | WATTAGE | GLOBE |
|----------------|----------|---------|---------------|
| VB911ALC | 1/2" | 75 | Polycarbonate |
| VB921ALC | 3/4" | 75 | Polycarbonate |
| VB111BGC | 1/2" | 100 | Glass |
| VB112BGC | 1/2" | 100 | Glass |
| VB121BGC | 3/4" | 100 | Glass |
| VB211BGC | 1/2" | 100 | Glass |
| VB221BGC | 3/4" | 100 | Glass |
| VB911BGC | 1/2" | 100 | Glass |
| VB911BLA | 1/2" | 100 | Polycarbonate |
| VB911BLE | 1/2" | 100 | Polycarbonate |
| VB911 BLL | 1/2" | 100 | Polycarbonate |
| VB911BLR | 1/2" | 100 | Polycarbonate |
| VB921BGC | 3/4" | 100 | Glass |
| VB911BLC | 1/2" | 100 | Polycarbonate |
| VB921BLC | 3/4" | 100 | Polycarbonate |
| VB921BLA | 3/4" | 100 | Polycarbonate |
| VB921BLE | 3/4" | 100 | Polycarbonate |
| VB921 BLL | 3/4" | 100 | Polycarbonate |
| VB921BLR | 3/4" | 100 | Polycarbonate |
| VB210CGC | 1/2" | 200 | Glass |
| VB211CGC | 1/2" | 200 | Glass |
| VB221CGC | 3/4" | 200 | Glass |
| VB911CGC | 1/2" | 200 | Glass |
| VB921CGC | 3/4" | 200 | Glass |

Vaportight Fixtures

Application

- For use in severe service areas where extreme conditions prevail
- Rugged, seamless die-cast construction prevents moisture penetration
 - Powder coated for maximum corrosion resistance
 - All fixtures are industrial grade, factory assembled and fully gasketed
 - Designed to protect light bulb from deteriorating effects of ice, corrosive fumes, non-explosive vapors, etc.
 - Available in bulk or custom packaging

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications

 E163827



Box mount with Wire Guard



Wall Mount



Wall Mount with Guard



Wall Mount with Box



Wall Mount with Box & Guard

| WALL MOUNT | | | |
|----------------|----------|---------|---------------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GLOBE |
| VW901ALC | 4" | 75 | Polycarbonate |
| VW900BGC | 4" | 100 | Glass |
| VW901BGC | 4" | 100 | Glass |
| VW901BLA | 4" | 100 | Polycarbonate |
| VW901BLC | 4" | 100 | Polycarbonate |
| VW901BLE | 4" | 100 | Polycarbonate |
| VW901BLL | 4" | 100 | Polycarbonate |
| VW901BLR | 4" | 100 | Polycarbonate |
| VW901CGC | 4" | 200 | Glass |

| WALL MOUNT WITH GLASS GLOBE AND GUARD | | | |
|---------------------------------------|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GUARD |
| VW101BGC | 4" | 100 | Cast |
| VW201BGC | 4" | 100 | Wire |
| VW201CGC | 4" | 200 | Wire |

| WALL MOUNT WITH 4" BOX | | | |
|------------------------|----------|---------|---------------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GLOBE |
| VX911ALC | 1/2" | 75 | Polycarbonate |
| VX911BLC | 1/2" | 100 | Polycarbonate |
| VX911BLA | 1/2" | 100 | Polycarbonate |
| VX911BLE | 1/2" | 100 | Polycarbonate |
| VX911BLL | 1/2" | 100 | Polycarbonate |
| VX911BLR | 1/2" | 100 | Polycarbonate |
| VX911CGC | 1/2" | 200 | Glass |
| VX911BGC | 1/2" | 100 | Glass |
| VX921BGC | 3/4" | 100 | Glass |
| VX921ALC | 3/4" | 75 | Polycarbonate |
| VX921BLA | 3/4" | 100 | Polycarbonate |
| VX921BLE | 3/4" | 100 | Polycarbonate |
| VX921BLL | 3/4" | 100 | Polycarbonate |
| VX921BLR | 3/4" | 100 | Polycarbonate |

| WALL MOUNT WITH 4" BOX, GLOBE AND GUARD | | | |
|---|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GUARD |
| VX211BGC | 1/2" | 100 | Wire |
| VX111BGC | 1/2" | 100 | Cast |
| VX221BGC | 3/4" | 100 | Wire |
| VX121BGC | 3/4" | 100 | Cast |
| VX211CGC | 1/2" | 200 | Wire |
| VX221CGC | 3/4" | 200 | Wire |

Vaportight Components and Accessories



VP911 & VP921



VC900



VB911 & VB921



VW901



VX911



VAP1



VGC



VGW

| GLOBES | | | |
|----------------|----------|---------------|-------|
| CATALOG NUMBER | HUB SIZE | MATERIAL | COLOR |
| VGLC1 | N/A | Polycarbonate | Clear |
| VGLC2 | N/A | Polycarbonate | Clear |
| VGLA1 | N/A | Polycarbonate | Amber |
| VGLE1 | N/A | Polycarbonate | Green |
| VGLL1 | N/A | Polycarbonate | Blue |
| VGLR1 | N/A | Polycarbonate | Red |
| VGLW1 | N/A | Polycarbonate | White |
| VGLH1 | N/A | Polycarbonate | White |
| VGGC1 | N/A | Glass | Clear |
| VGGC2 | N/A | Glass | Clear |
| VGGC3 | N/A | Glass | Clear |

| PENDANT CAP, SOCKET, GASKET & SCREWS | | | |
|--------------------------------------|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VP910B | 1/2" | 100 | Gray |
| VP911B | 1/2" | 100 | Gray |
| VP911C | 1/2" | 200 | Gray |
| VP920B | 3/4" | 100 | Gray |
| VP921B | 3/4" | 100 | Gray |
| VP921C | 3/4" | 200 | Gray |

| CEILING BOX CAP, SOCKET, GASKET & SCREWS | | | |
|--|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VC900B | N/A | 100 | Gray |
| VC900C | N/A | 200 | Gray |
| VC901B | N/A | 100 | Gray |
| VC901C | N/A | 200 | Gray |

| CEILING MOUNT BOX, SOCKET, GASKET & SCREWS | | | |
|--|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VB911B | 1/2" | 100 | Gray |
| VB911C | 1/2" | 200 | Gray |
| VB912B | 1/2" | 100 | Gray |
| VB921B | 3/4" | 100 | Gray |
| VB921C | 3/4" | 200 | Gray |

| RIGHT ANGLE BRACKET, SOCKET, GASKET & SCREWS | | | |
|--|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VW901B | N/A | 100 | Gray |
| VW901C | N/A | 100 | Gray |

| RIGHT ANGLE BRACKET WITH BOX, SOCKET, GASKET & SCREWS | | | |
|---|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VX911B | 1/2" | 100 | Gray |
| VX911C | 1/2" | 200 | Gray |
| VX921B | 3/4" | 100 | Gray |
| VX921C | 3/4" | 200 | Gray |

| GUARDS | | | |
|----------------|----------|---------|-------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | GURAD |
| VGC1 | N/A | 100 | Cast |
| VGW1 | N/A | 100 | Wire |
| VGW2 | N/A | 200 | Wire |

| VAPOR PLATE WITH GASKET | | | |
|-------------------------|----------|---------|--------|
| CATALOG NUMBER | HUB SIZE | WATTAGE | COLOR |
| VAP1 | N/A | N/A | Plated |

Accessories

Application

For use with weatherproof boxes, covers and kits

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



CP050, CP075, CP100

| CLOSURE PLUGS | | | |
|----------------|-----------|------|----------|
| CATALOG NUMBER | COLOR | SIZE | MATERIAL |
| CP050 | Unpainted | 1/2" | Zinc |
| CP050A | Bronze | 1/2" | Plastic |
| CP050B | Black | 1/2" | Plastic |
| CP050G | Gray | 1/2" | Plastic |
| CP050W | White | 1/2" | Plastic |
| CP075 | Unpainted | 3/4" | Zinc |
| CP075A | Bronze | 3/4" | Plastic |
| CP075B | Black | 3/4" | Plastic |
| CP075G | Gray | 3/4" | Plastic |
| CP075W | White | 3/4" | Plastic |
| CP100 | Unpainted | 1" | Zinc |

Weatherproof Accessories

Application

For use with weatherproof boxes, covers and kits

Standards

- UL 514B
- CSA C22.2 No. 18.3-12

Certifications



| WEATHERPROOF ACCESSORIES | | |
|--------------------------|-----------------|----------|
| CATALOG NUMBER | DESCRIPTION | MATERIAL |
| BH050 | 1/2" Box Holder | Zinc |
| BH075 | 3/4" Box Holder | Zinc |



BH050, BH075

Accessories

Application

For use with weatherproof boxes, covers and kits



G11



G21

| GASKETS | | | |
|----------------|-------|-------------|----------------------------------|
| CATALOG NUMBER | COLOR | DESCRIPTION | MATERIAL |
| G11 | Black | One Gang | Crosslinked Polyethylene Foam |
| G14 | Black | One Gang | Crosslinked Polyethylene Foam |
| G21 | Black | Two Gang | Crosslinked Polyethylene Foam |
| G71 | Black | 4" Round | Crosslinked Polyethylene Foam |
| LHG1 | Black | Lamp Holder | Low density cellulose base fiber |
| LHG2 | Black | Lamp Holder | Nitrile Rubber |

| WEATHERPROOF ACCESSORIES | | |
|--------------------------|---------------|----------|
| CATALOG NUMBER | DESCRIPTION | MATERIAL |
| WPMH1 | Mounting Lugs | Steel |



G71



LHG1



WPMH1

One Gang Non-Metallic Boxes

Application

One-gang outlet boxes are used as a weatherproof junction box or housing for a single electrical device in wet, damp or dry locations.

- 3/4" to 1/2" reducers included

Standards


- UL 514C

Certifications



E332841

| ONE GANG NON-METALLIC BOXES | | | | |
|-----------------------------|-------|--------------|-------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| 11073REPG1 | Gray | 16.3 | 2" | (3) 3/4" |
| 11073REPW1 | White | 16.3 | 2" | (3) 3/4" |

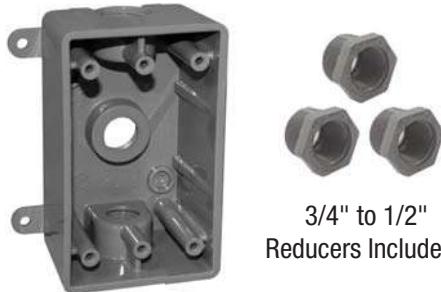

Two Gang Non-Metallic Boxes

Application


Two-gang outlet boxes are used as a weatherproof junction box or as a housing for up to two electrical devices in wet, damp or dry locations.

- (3) 1/2" holes and (4) 3/4" holes

Standards

- UL 514C

Certifications



E332841

| TWO GANG NON-METALLIC BOXES | | | | |
|-----------------------------|-------|--------------|-------|---------------------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| 120577RPG1 | Gray | 28.3 | 2" | (3) 1/2" & (4) 3/4" |
| 120577RPW1 | White | 28.3 | 2" | (3) 1/2" & (4) 3/4" |



Round Non-Metallic Boxes

Application


Round outlet boxes are used as a weatherproof junction box or mounting location for lampholders in wet, damp or dry locations.

- 3/4" to 1/2" reducers included

Standards

- UL 514C

Certifications



E332841

| ROUND NON-METALLIC BOXES | | | | |
|--------------------------|-------|--------------|--------|----------|
| CATALOG NUMBER | COLOR | CUBIC INCHES | DEPTH | OUTLETS |
| 71075REPG1 | Gray | 13.8 | 1-1/2" | (5) 3/4" |
| 71075REPW1 | White | 13.8 | 1-1/2" | (5) 3/4" |



3/4" to 1/2"
Reducers Included

One Gang Non-metallic Flip Covers

Application

May be used to provide weatherproof protection for an outdoor receptacle

- Suitable for wet locations when the covers are closed
- For horizontal installation
- Lockable covers

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



E332841

| HORIZONTAL CONFIGURATION | | |
|--------------------------|-------|------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C112LPG1 | Gray | Duplex |
| C112LPW1 | White | Duplex |

| VERTICAL CONFIGURATION | | |
|------------------------|-------|---------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C141PG1 | Gray | Toggle Switch |
| C141PW1 | White | Toggle Switch |

| UNIVERSAL CONFIGURATION | | |
|-------------------------|-------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C1M3PG1 | Gray | Duplex, GFCI, 1.410" Round |
| C1M3PW1 | White | Duplex, GFCI, 1.410" Round |



C112LPG1, C112LPW1



C141PG1, C141PW1



C1M3PG1, C1M3PW1

Two Gang Toggle Switch Cover


Application

May be used to provide weatherproof protection for an outdoor receptacle

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



E332841

| 2 GANG TOGGLE SW COV | | |
|----------------------|-------|-------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C241PG1 | Gray | Duplex and Lever Switch |
| C241PW1 | White | Duplex and Lever Switch |
| C242PG1 | Gray | GFCI and Lever Switch |
| C242PW1 | White | GFCI and Lever Switch |
| C244PG1 | Gray | Two Lever Switch |
| C244PW1 | White | Two Lever Switch |



C241PG1, C241PW1



C242PG1, C242PW1



C244PG1, C244PW1

Two Gang Multi Use Cover

Application

May be used to provide weatherproof protection for an outdoor receptacle

Standards


- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



E332841

| 2 GANG MULTI USE COVER | | |
|------------------------|-------|----------------------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| C2MMPG1 | Gray | Duplex, GFCI, 1.410" Round |
| C2MMPW1 | White | Duplex, GFCI, 1.410" Round |

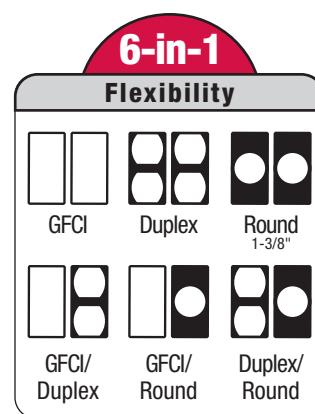

Non Metallic Blank Covers

Application

One-gang blank covers are used with one-gang, rectangular weatherproof boxes. Protects boxes not in use

Standards

- UL 514C
- CSA C22.2 No. 18.3-12

Certifications



E332841

| ONE GANG BLANK COVERS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| BC1001PG1 | Gray |
| BC1001PW1 | White |



Non Metallic Blank Covers

Application

Two-gang blank covers are used with two-gang, square weatherproof boxes. Protects boxes not in use.

Standards

- UL 514

Certifications



E332841

| TWO GANG BLANK COVERS | |
|-----------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| BC2000PG1 | Gray |
| BC2000PW1 | White |



Non Metallic Blank Covers

Application

One-gang blank covers are used with one-gang, rectangular weatherproof boxes. Protects boxes not in use

Standards

- UL 514C

Certifications



E332841

| ROUND BLANK COVERS | |
|--------------------|------------|
| CATALOG NUMBER | TRADE SIZE |
| BC7000PG1 | Gray |
| BC7000PW1 | White |



One Gang Non-metallic Lamp Holder Covers

Application

Three hole cluster covers are used to provide a mounting location for up to three lampholders to a one-gang weatherproof box.

- With three 1/2" threaded knockouts

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



E163827

ONE GANG NON-METALLIC LAMP HOLDER COVERS

| CATALOG NUMBER | COLOR | TRADE SIZE |
|----------------|-------|------------|
| GC1053PG1 | Gray | 1/2" |
| GC1053PW1 | White | 1/2" |



Round Non-metallic Lamp Holder Covers

Application

Three hole cluster covers are used to provide a mounting location for up to three lampholders to a 4" round weatherproof box.

- With three 1/2" threaded knockouts

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



E163827

ROUND NON-METALLIC LAMP HOLDER COVERS

| CATALOG NUMBER | COLOR | TRADE SIZE |
|----------------|-------|------------|
| GC7053PG1 | Gray | 1/2" |
| GC7053PW1 | White | 1/2" |



Non-metallic WP Lamp Holder

Application

Lampholders are used in conjunction with weatherproof boxes and covers for outdoor lighting applications.

- Fits 1/2" knockouts
- Adjustable

Standards

- UL 1598
- CSA C22.2 No. 250.0-08

Certifications



NON METALLIC WP LAMP HOLDER

| CATALOG NUMBER | COLOR | DESCRIPTION |
|----------------|-------|-------------|
| WPH1PG1 | Gray | Lampholder |
| WPH1PW1 | White | Lampholder |



PAR38 type lamps
75-150 max. watt
(not included)

Slimline While In-use Covers

Application

Slimline in-use receptacle covers allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- Adaptable for GFCI and duplex receptacles
- For vertical installations
- Lockable
- Plastic

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications



| HORIZONTAL CONFIGURATION | | |
|--------------------------|-------|-------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| WL14STHG1 | Gray | Duplex/GFCI |
| WL14STHTG1 | Gray | Duplex/GFCI |
| WL14STHW1 | White | Duplex/GFCI |



Meets NEC's 2020 "Extra Duty" Requirement

15 Amp Rated



Low profile,
only 1-9/16" deep

No bending of the cord inside
the cover with vertical cord exits

| VERTICAL CONFIGURATION | | |
|------------------------|-------|-------------|
| CATALOG NUMBER | COLOR | RECEPTACLE |
| WL14STVG1 | Gray | Duplex/GFCI |
| WL14STVTG1 | Gray | Duplex/GFCI |
| WL14STVW1 | White | Duplex/GFCI |



Meets NEC's 2020 "Extra Duty" Requirement

15 Amp Rated



only 1-9/16" deep
Low profile,

No bending of the cord inside
the cover with vertical cord exits

One-Gang While-In-Use Receptacle Cover

Application

One-gang in-use receptacle covers allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 16 configurations
- Adaptable for GFCI, duplex, round and switch devices
- Lockable
- Non-Metallic
- Mount vertically or horizontally with the corner hinge

ONE-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|--------|-------------|
| WL10MSG1 | Gray | 2-1/4" Deep |
| WL10MSW1 | White | 2-1/4" Deep |
| WL10MSA1 | Bronze | 2-1/4" Deep |
| WL10MSTG1 | Clear | 2-1/4" Deep |
| WL10MDG1 | Gray | 3-1/8" Deep |
| WL10MDW1 | White | 3-1/8" Deep |
| WL10MDA1 | Bronze | 3-1/8" Deep |
| WL10MDTG1 | Clear | 3-1/8" Deep |



Includes:

- Adaptor plates, pre-installed gasket and hardware


Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

E332841
LISTED

174008

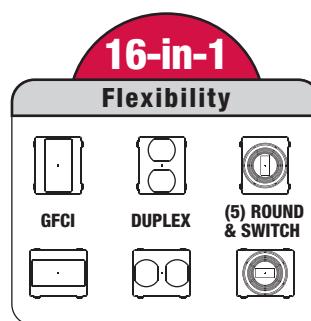

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

Two-Gang While-In-Use Receptacle Cover

Application

Two-gang in-use receptacle covers allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 55 configurations
- Adaptable for GFCI, duplex, round and switch devices
- Lockable
- Non-Metallic

TWO-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|--------|-------------|
| WL21MMDG1 | Gray | 3-1/8" Deep |
| WL21MMDW1 | White | 3-1/8" Deep |
| WL21MMDA1 | Bronze | 3-1/8" Deep |
| WL21MMDTG1 | Clear | 3-1/8" Deep |



Includes:

- Adaptor plates, pre-installed gasket and hardware


Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

E332841
LISTED

174008

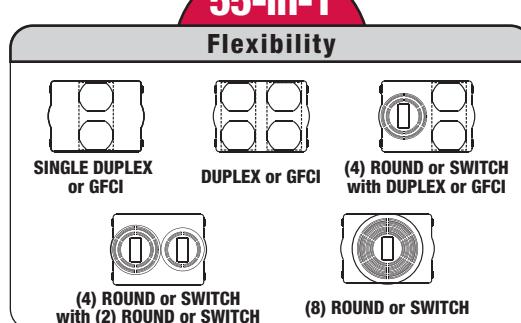

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

One-Gang While-In-Use GFCI Receptacle Kit

Application

One-gang in-use receptacle kits allow an outlet to be utilized while the cover is closed in wet, damp or dry locations.

- 15-Amp tamper-resistant, weather-resistant GFCI receptacle included
- Lockable
- Non-Metallic and Metal Die cast Box
- Mount vertically or horizontally with the corner hinge

Includes:

- One-gang metal box with three 1/2" holes, one-gang while-in-use cover, TRWR GFCI receptacle, closure plugs, adaptor plates, pre-installed gasket and hardware

Standards

- UL 514D
- CSA C22.2 No. 42.1-13

Certifications

 E324138
LISTED

 174008


ONE-GANG WHILE-IN-USE RECEPTACLE COVER

| CATALOG NUMBER | COLOR | DEPTH |
|----------------|-------|-------------|
| WPB1S2G3 | Gray | 2-1/4" Deep |
| WPB1S2TG3 | Clear | 2-1/4" Deep |
| WPB1S2TW3 | White | 2-1/4" Deep |



16-in-1

Flexibility

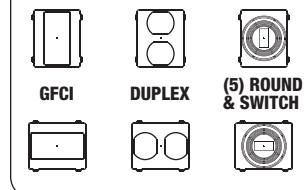

Meets NEMA 3R and NEC's 2020 "Extra Duty" Requirement

Motion Sensor

Application

Motion sensors can be used in conjunction with LED or standard light kits for outdoor security or aesthetic lighting applications.

- Set for motion detection or dusk-to-dawn
- Motion detection with Passive Infrared (PIR) technology
- 240° field of view
- Adjustable sensitivity from 5 to 70 feet
- Adjustable on-times from 1 to 20 minutes

Standards

- UL 773A
- CSA C22.2 No. 284-16

Certifications



| MOTION SENSOR | | |
|----------------|--------|------------|
| CATALOG NUMBER | COLOR | TRADE SIZE |
| MSWDD01G1 | Gray | - |
| MSWDD01A1 | Bronze | - |
| MSWDD01w1 | White | - |



CONNECTOR LISTINGS

| CATALOG NUMBERS | K.O. TRADE SIZE | NM CABLE RANGE | FLEXIBLE CORD DIA. RANGE | SE OVAL CABLE RANGE | SER ROUND CABLE DIA. RANGE | AC CABLE RANGE | | MCI CABLE RANGE | | MCI-A CABLE RANGE | | HCF MCI-A CABLE RANGE | | FMC TRADE SIZE | | RWFMC TRADE SIZE | | |
|-----------------|-----------------|----------------|--------------------------|---------------------|----------------------------|------------------------------|------------------------------|------------------------------|----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|----------|------------------|----------|------|
| | | | | | | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | |
| ASQ037 | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.57" | 14/2 - 10/3 0.48"-0.60" | 14/2 - 10/3 0.469"-0.60" | 14/2 - 10/3 0.47"-0.61" | - | 10/3 - 10/4 0.495"-0.538" | - | 10/2 - 10/4 0.495"-0.584" | 3/8" | 3/8" | 3/8" | 3/8" | |
| ASQ037DSI | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.57" | 14/2 - 10/3 0.48"-0.60" | 14/2 - 10/3 0.469"-0.60" | 14/2 - 10/3 0.47"-0.61" | - | 10/3 - 10/4 0.495"-0.538" | - | 10/2 - 10/4 0.495"-0.584" | 3/8" | 3/8" | 3/8" | 3/8" | |
| ASQ037I | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.575" | 14/2 - 10/3 0.48"-0.60" | 14/2 - 10/3 0.469"-0.60" | 14/2 - 10/3 0.47"-0.61" | - | 10/3 - 10/4 0.495"-0.538" | - | 10/2 - 10/4 0.495"-0.584" | 3/8" | 3/8" | 3/8" | 3/8" | |
| ASQ037S | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.575" | 14/2 - 10/3 0.48"-0.60" | 14/2 - 10/3 0.469"-0.60" | 14/2 - 10/3 0.47"-0.61" | - | 10/3 - 10/4 0.495"-0.538" | - | 10/2 - 10/4 0.495"-0.584" | 3/8" | 3/8" | 3/8" | 3/8" | |
| ASQ050 | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| ASQ050DSI | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| ASQ050I | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| ASQ050S | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| ASQ075 | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| ASQ075I | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| ASQ100 | 1" | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| ASQ100I | 1" | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| ASQ125 | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| ASQ125I | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| ASQ150 | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| ASQ150I | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| ASQ200 | 2" | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| ASQ200I | 2" | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| ASQ250 | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| ASQ250I | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| ASQ300 | 3" | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| ASQ300I | 3" | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| ASQ350 | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |
| ASQ350I | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |
| ASQ400 | 4" | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| ASQ400I | 4" | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| BXC037 | 1/2" | - | - | - | - | 14/2 - 10/2 0.46"-0.598" | - | 14/2 - 10/3 0.469"-0.600" | - | - | - | - | - | - | - | - | - | |
| BXC037DSI | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.618" | 14/2 - 10/3 0.469"-0.618" | 0.395"-0.638" | 0.40"-0.618" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | - | - | - | 3/8" | |
| BXC037S | 1/2" | - | - | - | - | 14/2 - 10/2 0.46"-0.598" | - | 14/2 - 10/3 0.469"-0.600" | - | - | - | - | - | - | - | - | | |
| CBXC037DSI | 1/2" | - | - | - | - | 14/2 - 10/4 0.40"-0.618" | 14/2 - 10/3 0.40"-0.618" | 0.395"-0.638" | 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 14/2 - 10/3 0.395"-0.638" | 3/8" | 3/8" | - | - | |
| DUP1 | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.50" | 14/2 - 10/3 0.46"-0.50" | 0.48"-0.58" | 0.47"-0.60" | 0.468"-0.61" | - | 14/2 - 10/3 0.37"-0.495" | - | 12/2 - 10/2 0.418"-0.495" | 3/8" | 3/8" | 3/8" | 3/8" |
| DUP1DSI | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.50" | 14/2 - 10/3 0.46"-0.50" | 0.48"-0.58" | 0.47"-0.60" | 0.468"-0.61" | - | 14/2 - 10/3 0.37"-0.495" | - | 12/2 - 10/2 0.418"-0.495" | 3/8" | 3/8" | 3/8" | 3/8" |
| DUP1S | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.50" | 14/2 - 10/3 0.46"-0.50" | 0.48"-0.58" | 0.47"-0.60" | 0.468"-0.61" | - | 14/2 - 10/3 0.37"-0.495" | - | 12/2 - 10/2 0.418"-0.495" | - | - | - | |
| DUP2 | 1/2" | - | - | - | - | 14/2 - 10/3 0.46"-0.50" | 14/2 - 10/3 0.46"-0.50" | 0.48"-0.58" | 0.47"-0.60" | 0.468"-0.61" | - | - | - | - | 3/8" | 3/8" | 3/8" | 3/8" |
| FBMC037 | 1/2" | - | - | - | - | 14/2 - 10/2 0.463"-0.59" | 14/2 - 10/2 0.463"-0.59" | 0.47"-0.552" | 0.47"-0.552" | 0.465"-0.585" | - | 12/2 - 10/2 0.435"-0.518" | - | 12/2 - 10/2 0.418"-0.495" | 3/8" | 3/8" | - | - |
| FCA050 | 1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1/2" | - | 1/2" | - | |
| FCA050I | 1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1/2" | - | 1/2" | - | |
| FCA075 | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | - | 3/4" | - | |
| FCA075I | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | - | 3/4" | - | |
| MASQ037 | 3/8" | - | - | - | - | 14/2 - 10/3 0.460"-0.575" | 14/2 - 10/3 0.480"-0.600" | 0.469"-0.600" | 0.470"-0.610" | - | - | - | - | 3/8" | 3/8" | 3/8" | 3/8" | |
| MASQ037I | 3/8" | - | - | - | - | 14/2 - 10/3 0.460"-0.575" | 14/2 - 10/3 0.480"-0.600" | 0.469"-0.600" | 0.470"-0.610" | - | - | - | - | 3/8" | 3/8" | 3/8" | 3/8" | |
| MASQ050 | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| MASQ050I | 1/2" | - | - | - | - | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | 8/2 - 8/3 | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| MASQ075 | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| MASQ075I | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| MASQ100 | 1" | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| MASQ100I | 1" | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| MASQ125 | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| MASQ125I | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| MASQ150 | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| MASQ150I | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| MASQ200 | 2" | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| MASQ200I | 2" | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| MASQ250 | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| MASQ250I | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| MASQ300 | 3" | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| MASQ300I | 3" | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| MASQ350 | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |
| MASQ350I | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |

CONNECTOR LISTINGS

| CATALOG NUMBERS | K.O. TRADE SIZE | NM CABLE RANGE | FLEXIBLE CORD DIA. RANGE | SE OVAL CABLE RANGE | SER ROUND CABLE DIA. RANGE | AC CABLE RANGE | | MCI CABLE RANGE | | MCI-A CABLE RANGE | | HCF MCI-A CABLE RANGE | | FMC TRADE SIZE | | RWFMC TRADE SIZE | | | |
|-----------------|-----------------|-----------------------------|--------------------------|----------------------------------|----------------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------|----------------|-----------------------|----------------|----------------|----------|------------------|----------|--------|---|
| | | | | | | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | STEEL | ALUMINUM | | |
| MASQ400 | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| MASQ400I | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| MSSQ037 | 3/8" | - | - | - | - | 10/3 0.575" | 10/3 0.600" | 10/3 0.600" | - | - | - | - | - | - | - | 3/8" | 3/8" | | |
| MSSQ037I | 3/8" | - | - | - | - | 10/3 0.575" | 10/3 0.600" | 10/3 0.600" | - | - | - | - | - | - | - | 3/8" | 3/8" | | |
| MSSQ050 | 1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| MSSQ050I | 1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | |
| MSSQ075 | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| MSSQ075I | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | 3/4" | 3/4" | 3/4" | |
| MSSQ100 | 1" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| MSSQ100I | 1" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1" | 1" | 1" | 1" | |
| MSSQ125 | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| MSSQ125I | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| MSSQ150 | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| MSSQ150I | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| MSSQ200 | 2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| MSSQ200I | 2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| MSSQ250 | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| MSSQ250I | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | 2-1/2" | 2-1/2" | 2-1/2" | |
| MSSQ300 | 3" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| MSSQ300I | 3" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3" | 3" | 3" | 3" | |
| MSSQ350 | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |
| MSSQ350I | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | 3-1/2" | 3-1/2" | 3-1/2" | |
| MSSQ400 | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| MSSQ400I | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| RX037 | 3/8" | (1) 14/2 - 12/2 (2) 14/2 | 0.209"- 0.450" | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| RX037S | 3/8" | 14/2 - 12/2 | 0.209"- 0.450" | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| RX075 | 3/4" | 10/3 - 8/2 | - | 0.52"- 0.61"- 0.51" x 0.80" | 0.57"- 0.69" | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| RX075S | 3/4" | 10/3 - 8/2 | - | 0.36"- 0.61"- 0.51" x 0.80" | 0.05"- 0.75" | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| RX100 | 1" | 10/3 - 4/3 | - | 0.51" x 0.80"- 0.62" x 0.965" | 0.69"- 0.92" | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| RX125 | 1-1/4" | 4/3 - 2/3 | - | 0.67" x 1.06"- 0.73" x 1.235" | 1.19" | - | - | - | - | - | - | - | - | - | - | - | - | - | |
| SAD037 | 1/2" | 12/2 - 10/3 | - | - | - | 14/2- 10/3 0.465"- 0.500" | 14/2- 10/3 0.480"- 0.585" | 0.475"- 0.600" | 0.468"- 0.610" | - | 0.452"- 0.538" | - | 0.452"- 0.584" | - | - | - | - | - | - |
| SAD037S | 1/2" | 12/2 - 10/3 | - | - | - | 14/2- 10/3 0.465"- 0.500" | 14/2- 10/3 0.480"- 0.585" | 0.475"- 0.600" | 0.468"- 0.610" | - | 0.452"- 0.538" | - | 0.452"- 0.584" | - | - | - | - | - | - |
| SC050 | 1/2" | - | - | - | - | 8/2 - 8/4 | 8/2 - 8/4 | 0.680"- 0.780" | 0.675"- 0.780" | - | - | - | - | - | - | - | - | - | |
| SSQ037 | 3/8" | - | - | - | - | 12/2- 10/3 0.525"- 0.575" | 10/2- 10/3 0.525"- 0.600" | 12/2- 10/3 0.490"- 0.600" | 12/2- 10/3 0.500"- 0.610" | - | - | - | - | 3/8" | 3/8" | - | - | | |
| SSQ037I | 3/8" | - | - | - | - | 12/2- 10/3 0.525"- 0.575" | 10/2- 10/3 0.525"- 0.600" | 12/2- 10/3 0.490"- 0.600" | 12/2- 10/3 0.500"- 0.610" | - | - | - | - | 3/8" | 3/8" | - | - | | |
| SSQ050 | 1/2" | - | - | - | - | 6/3 0.885" | 6/3 0.880" | 6/3 0.860" | 6/3 0.865" | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | | |
| SSQ050I | 1/2" | - | - | - | - | 6/3 0.885" | 6/3 0.880" | 6/3 0.860" | 6/3 0.865" | - | - | - | - | 1/2" | 1/2" | 1/2" | 1/2" | | |
| SSQ075 | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | - | 3/4" | - | |
| SSQ075I | 3/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3/4" | - | 3/4" | - | |
| SSQ100 | 1" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1" | - | 1" | - | |
| SSQ100I | 1" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1" | - | 1" | - | |
| SSQ125 | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| SSQ125I | 1-1/4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/4" | 1-1/4" | 1-1/4" | 1-1/4" | |
| SSQ150 | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| SSQ150I | 1-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 1-1/2" | 1-1/2" | 1-1/2" | 1-1/2" | |
| SSQ200 | 2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| SSQ200I | 2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2" | 2" | 2" | 2" | |
| SSQ250 | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | - | 2-1/2" | - | |
| SSQ250I | 2-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 2-1/2" | - | 2-1/2" | - | |
| SSQ300 | 3" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3" | - | 3" | - | |
| SSQ300I | 3" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3" | - | 3" | - | |
| SSQ350 | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | - | 3-1/2" | - | |
| SSQ350I | 3-1/2" | - | - | - | - | - | - | - | - | - | - | - | - | - | 3-1/2" | - | 3-1/2" | - | |
| SSQ400 | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| SSQ400I | 4" | - | - | - | - | - | - | - | - | - | - | - | - | - | 4" | 4" | 4" | 4" | |
| MYSQ050 | 1/2" | - | - | - | - | 8/3 0.760" | 8/3 0.785" | 8/3 0.755" | 8/3 0.775" | - | - | - | - | - | 1/2" | 1/2" | | | |
| MYSQ050I | 1/2" | - | - | - | - | 8/3 0.760" | 8/3 0.785" | 8/3 0.755" | 8/3 0.775" | - | - | - | - | - | 1/2" | 1/2" | | | |
| MDA037 | 3/8" | - | - | - | - | 12/2 - 14/2 | 12/2 - 14/2 | 12/2 - 14/2 | 12/2 - 14/2 | - | - | - | - | 3/8" | 3/8" | - | - | | |
| MDA037I | 3/8" | - | - | - | - | 12/2 - 14/2 | 12/2 - 14/2 | 12/2 - 14/2 | 12/2 - 14/2 | - | - | - | - | 3/8" | 3/8" | - | - | | |

INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| 11053A1 | 81 | 21073A1 | 81 | A911W1 | 100 | AMC052 | 52 |
| 11053B1 | 81 | 21073G1 | 81 | A912A1 | 100 | AMC075 | 52 |
| 11053G1 | 81 | 21073W1 | 81 | A912B2 | 100 | ASB0 | 50 |
| 11053W1 | 81 | 21074A1 | 81 | A912G1 | 100 | ASB1 | 50 |
| 11054A1 | 81 | 21074G1 | 81 | A912W1 | 100 | ASB2 | 50 |
| 11054G1 | 81 | 21074W1 | 81 | AB212A1 | 99 | ASB3 | 50 |
| 11054W1 | 81 | 21103G1 | 81 | AB212B1 | 99 | ASB4 | 50 |
| 11055A1 | 81 | 22055G1 | 82 | AB212G1 | 99 | ASC050 | 23 |
| 11055G1 | 81 | 22075G1 | 82 | AB212W1 | 99 | ASC050U | 23 |
| 11055W1 | 81 | 22105G1 | 82 | AB213A1 | 99 | ASC075 | 23 |
| 11073A1 | 81 | 31055A1 | 81 | AB213W1 | 99 | ASC075U | 23 |
| 11073G1 | 81 | 31055B1 | 81 | AB912A1 | 101 | ASC100 | 23 |
| 11073REPG1 | 111 | 31055G1 | 81 | AB912B3 | 101 | ASC100U | 23 |
| 11073REPW1 | 111 | 31055W1 | 81 | AB912G1 | 101 | ASC150 | 23 |
| 11073W1 | 81 | 31075G1 | 81 | AB912O1 | 101 | ASC150U | 23 |
| 11074A1 | 81 | 31105G1 | 81 | AB912W1 | 101 | ASC200 | 23 |
| 11074G1 | 81 | 32055G1 | 82 | AB932A1 | 101 | ASC200U | 23 |
| 11074W1 | 81 | 32056G1 | 82 | AB932B0 | 101 | ASC300 | 23 |
| 11075A1 | 81 | 32057A1 | 82 | AB932G1 | 101 | ASC300U | 23 |
| 11075G1 | 81 | 32057G1 | 82 | AB942A1 | 105 | ASC400 | 23 |
| 11075W1 | 81 | 32075G1 | 82 | AB942G1 | 105 | ASC400U | 23 |
| 11103G1 | 81 | 32076G1 | 82 | AB942W1 | 105 | ASCN050 | 7 |
| 12053A1 | 82 | 32077G1 | 82 | AB972A1 | 105 | ASCN075 | 7 |
| 12053G1 | 82 | 32105G1 | 82 | AB972G1 | 105 | ASQ037 | 47 |
| 12053W1 | 82 | 41055G1 | 81 | AB972W1 | 105 | ASQ037I | 47 |
| 12054A1 | 82 | 41075G1 | 81 | ABE312A3 | 103 | ASQ037DSI | 47 |
| 12054G1 | 82 | 42057G1 | 82 | ABE312B0 | 103 | ASQ050 | 47 |
| 12054W1 | 82 | 42077G1 | 82 | ABE312G3 | 103 | ASQ050I | 47 |
| 12055A1 | 82 | 42107G1 | 82 | ABE312W3 | 103 | ASQ050DSI | 47 |
| 12055G1 | 82 | 71055A1 | 83 | ABE712G3 | 103 | ASQ075 | 47 |
| 12055W1 | 82 | 71055B1 | 83 | ABE712W3 | 103 | ASQ075I | 47 |
| 12056G1 | 82 | 71055G1 | 83 | ACB705FG1 | 94 | ASQ100 | 47 |
| 12057RPG1 | 111 | 71055W1 | 83 | ACB707FG1 | 94 | ASQ100I | 47 |
| 12057RPW1 | 111 | 71075A1 | 83 | ACCN050 | 7 | ASQ125 | 47 |
| 12057G1 | 82 | 71075G1 | 83 | ACCN075 | 7 | ASQ125I | 47 |
| 12073G1 | 82 | 71075REPG1 | 112 | ACCN100 | 7 | ASQ150 | 47 |
| 12074A1 | 82 | 71075REPW1 | 112 | ADC050 | 23 | ASQ150I | 47 |
| 12074G1 | 82 | 71075W1 | 83 | ADC050U | 23 | ASQ200 | 47 |
| 12074W1 | 82 | A211A1 | 98 | ADC075 | 23 | ASQ200I | 47 |
| 12075G1 | 82 | A211G1 | 98 | ADC075U | 23 | ASQ250 | 47 |
| 12077G1 | 82 | A211W1 | 98 | ADC100 | 23 | ASQ250I | 47 |
| 12103A1 | 82 | A212A1 | 98 | ADC100U | 23 | ASQ300 | 47 |
| 12103G1 | 82 | A212G1 | 98 | ADC150 | 23 | ASQ300I | 47 |
| 12103W1 | 82 | A212W1 | 98 | ADC150U | 23 | ASQ350 | 47 |
| 13077G1 | 83 | A812A0 | 102 | ADC200 | 23 | ASQ350I | 47 |
| 13107G1 | 83 | A812B0 | 102 | ADC200U | 23 | ASQ400 | 47 |
| 21053A1 | 81 | A812G0 | 102 | ADC300 | 23 | ASQ400I | 47 |
| 21053G1 | 81 | A812W0 | 102 | ADC300U | 23 | BC1000A1 | 87 |
| 21053W1 | 81 | A911A1 | 100 | ADC400 | 23 | BC1000B1 | 87 |
| 21054A1 | 81 | A911B2 | 100 | ADC400U | 23 | BC1000G1 | 87 |
| 21054G1 | 81 | A911G1 | 100 | AMC050 | 52 | BC1001G1 | 87 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| BC1001PG1 | 115 | C11LH1 | 63 | C22LH2 | 63 | C82 | 63 |
| BC1001PW1 | 115 | C11LH2 | 63 | C22LH3 | 63 | C83 | 63 |
| BC1002A1 | 87 | C11LH3 | 63 | C22SS | 60 | CBXC037DSI | 53 |
| BC1002B1 | 87 | C11SS | 60 | C231G1 | 86 | CC050 | 23 |
| BC1002G1 | 87 | C121A1 | 85 | C232G1 | 86 | CC075 | 23 |
| BC1002W1 | 87 | C121B1 | 85 | C233A1 | 86 | CC100 | 23 |
| BC2000A1 | 87 | C121G1 | 85 | C233G1 | 86 | CC150 | 23 |
| BC2000G1 | 87 | C121W1 | 85 | C233W1 | 86 | CC200 | 23 |
| BC2000PG1 | 115 | C122A1 | 85 | C241G1 | 86 | CC300 | 23 |
| BC2000PW1 | 115 | C122B1 | 85 | C241PG1 | 113 | CC400 | 23 |
| BC2000W1 | 87 | C122G1 | 85 | C241PW1 | 113 | CCON050 | 2 |
| BC3000G1 | 88 | C122W1 | 85 | C242G1 | 86 | CCON050I | 2 |
| BC7000A1 | 88 | C131G1 | 85 | C24P2G1 | 113 | CCON050RT | 3 |
| BC7000G1 | 88 | C141A1 | 85 | C242PW1 | 113 | CCON075 | 2 |
| BC7000PG1 | 115 | C141B1 | 85 | C244A1 | 86 | CCON075I | 2 |
| BC7000PW1 | 115 | C141G1 | 85 | C244G1 | 86 | CCON075RT | 3 |
| BC7000W1 | 88 | C141PG1 | 113 | C244PG1 | 113 | CCON100 | 2 |
| BC7004G1 | 88 | C141PW1 | 113 | C244PW1 | 113 | CCON100I | 2 |
| BH050 | 110 | C141W1 | 85 | C255A1 | 86 | CCON100RT | 3 |
| BH075 | 110 | C161A1 | 85 | C255G1 | 86 | CCON125 | 2 |
| BMB3 | 71 | C161G1 | 85 | C255W1 | 86 | CCON125I | 2 |
| BMB4 | 71 | C161W1 | 85 | C291G1 | 86 | CCON150 | 2 |
| BSP050 | 34 | C163G1 | 85 | C292G1 | 86 | CCON150I | 2 |
| BSP075 | 34 | C164G1 | 85 | C293G1 | 86 | CCON200 | 2 |
| BSP200 | 34 | C165G1 | 85 | C2MMPG1 | 114 | CCON200I | 2 |
| BXC037 | 50 | C171G1 | 85 | C2MMPW1 | 114 | CCON250 | 2 |
| BXC037DSI | 50 | C181A1 | 85 | C3444G1 | 86 | CCON250I | 2 |
| BXC037S | 50 | C181G1 | 85 | C4 | 60 | CCON300 | 2 |
| BXCS037DSI | 50 | C181W1 | 85 | C41 | 63 | CCON300I | 2 |
| BXS037 | 50 | C182A1 | 85 | C42 | 63 | CCON350 | 2 |
| C11 | 60 | C182G1 | 85 | C43 | 63 | CCON350I | 2 |
| C111A1 | 85 | C182W1 | 85 | C4JA | 65 | CCON400 | 2 |
| C111B1 | 85 | C189G1 | 85 | C4JPT | 64 | CCON400I | 2 |
| C111G1 | 85 | C1M3PG1 | 113 | C4LH1 | 63 | CCOP050 | 2 |
| C111W1 | 85 | C1M3PW1 | 113 | C4LH2 | 63 | CCOP050RT | 3 |
| C112A1 | 85 | C210A1 | 86 | C4LH3 | 63 | CCOP075 | 2 |
| C112B1 | 85 | C210G1 | 86 | C5 | 60 | CCOP075RT | 3 |
| C112G1 | 85 | C210W1 | 86 | C6 | 62 | CCOP100 | 2 |
| C112LPG1 | 113 | C211A1 | 86 | C61 | 63 | CCOP100RT | 3 |
| C112LPW1 | 113 | C211G1 | 86 | C61B | 63 | CCOP125 | 2 |
| C112W1 | 85 | C211W1 | 86 | C62 | 63 | CCOP150 | 2 |
| C11B | 60 | C22 | 60 | C62B | 63 | CCOP200 | 2 |
| C11CSH1 | 64 | C221A1 | 86 | C63 | 63 | CCOP250 | 2 |
| C11CSH2 | 64 | C221G1 | 86 | C66 | 63 | CCOP300 | 2 |
| C11CSH3 | 64 | C221W1 | 86 | C67 | 63 | CCOP350 | 2 |
| C11CSLH1 | 64 | C222A1 | 86 | C68 | 63 | CCOP400 | 2 |
| C11CSLH2 | 64 | C222G1 | 86 | C6D | 62 | CE050 | 5 |
| C11CSLH3 | 64 | C222W1 | 86 | C7 | 62 | CE075 | 5 |
| C11D | 60 | C22D | 60 | C71 | 62 | CEB050 | 36 |
| C11DLH1D | 63 | C22JA | 65 | C72 | 62 | CEB075 | 36 |
| C11JA | 65 | C22JPT | 64 | C8 | 60 | CEB100 | 36 |
| C11JPT | 64 | C22LH1 | 63 | C81 | 63 | CGA1002M | 78 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| CGA1004M | 78 | CGS1258M | 79 | CGS3728M | 79 | CH150 | 70 |
| CGA1005M | 78 | CGS1259M | 79 | CGS501FM | 79 | CH200 | 70 |
| CGA1006M | 78 | CGS15010FM | 79 | CGS501M | 79 | CH250 | 70 |
| CGA1007M | 78 | CGS15010M | 79 | CGS5025FM | 79 | CH300 | 70 |
| CGA12510M | 78 | CGS15011M | 79 | CGS5025M | 79 | CLB050AN | 19 |
| CGA1256M | 78 | CGS1506FM | 79 | CGS502FM | 79 | CLB075AN | 19 |
| CGA1257M | 78 | CGS1506M | 79 | CGS502M | 79 | CLB100AN | 19 |
| CGA1258M | 78 | CGS1507FM | 79 | CGS504FM | 79 | CLB125AN | 19 |
| CGA1259M | 78 | CGS1507M | 79 | CGS504M | 79 | CLB150AN | 19 |
| CGA15010M | 78 | CGS1508FM | 79 | CGS505M | 79 | CLB200AN | 19 |
| CGA1506M | 78 | CGS1508M | 79 | CGS506M | 79 | CLBC050AN | 19 |
| CGA1507M | 78 | CGS1509FM | 79 | CGS751FM | 79 | CLBC075AN | 19 |
| CGA1508M | 78 | CGS1509M | 79 | CGS751M | 79 | CLBC100AN | 19 |
| CGA1509M | 78 | CGS20010FM | 79 | CGS7525M | 79 | CLBC125AN | 19 |
| CGA20010M | 78 | CGS20010M | 79 | CGS752FM | 79 | CLBC150AN | 19 |
| CGA20011M | 78 | CGS20011M | 79 | CGS752M | 79 | CLBC200AN | 19 |
| CGA20012M | 78 | CGS20012FM | 79 | CGS754FM | 79 | CMB037SS | 6, 53 |
| CGA20013M | 78 | CGS20012M | 79 | CGS754M | 79 | CMB050SS | 6, 53 |
| CGA20014M | 78 | CGS20013FM | 79 | CGS755FM | 79 | CMB075SS | 6, 53 |
| CGA20015M | 78 | CGS20013M | 79 | CGS755M | 79 | CN050 | 32 |
| CGA501M | 78 | CGS20014FM | 79 | CGS756M | 79 | CN050I | 32 |
| CGA5025M | 78 | CGS20014M | 79 | CGY1002M | 78 | CN075 | 32 |
| CGA502M | 78 | CGS20015FM | 79 | CGY1004M | 78 | CN075I | 32 |
| CGA504M | 78 | CGS20015M | 79 | CGY1005M | 78 | CN100 | 32 |
| CGA751M | 78 | CGS20016M | 79 | CGY1006M | 78 | CN100I | 32 |
| CGA752M | 78 | CGS20017M | 79 | CGY1007M | 78 | CN125 | 32 |
| CGA754M | 78 | CGS20018M | 79 | CGY12510M | 78 | CN125I | 32 |
| CGA755M | 78 | CGS20019M | 79 | CGY1256M | 78 | CN150 | 32 |
| CGC0501 | 77 | CGS20020M | 79 | CGY1257M | 78 | CN150I | 32 |
| CGC0502 | 77 | CGS25014M | 79 | CGY1258M | 78 | CN200 | 32 |
| CGC0503 | 77 | CGS25016M | 79 | CGY1259M | 78 | CN200I | 32 |
| CGC0751 | 77 | CGS25017M | 79 | CGY15010M | 78 | CN250 | 32 |
| CGC0752 | 77 | CGS25018M | 79 | CGY1506M | 78 | CN250I | 32 |
| CGC0753 | 77 | CGS25019M | 79 | CGY1507M | 78 | CN300 | 32 |
| CGC1001 | 77 | CGS25020M | 79 | CGY1508M | 78 | CN300I | 32 |
| CGC1002 | 77 | CGS30014M | 79 | CGY1509M | 78 | CN350 | 32 |
| CGC1003 | 77 | CGS30016M | 79 | CGY501M | 78 | CN350I | 32 |
| CGC1004 | 77 | CGS30017M | 79 | CGY5025M | 78 | CN400 | 32 |
| CGC1005 | 77 | CGS30018M | 79 | CGY502M | 78 | CN400I | 32 |
| CGS1002FM | 79 | CGS30019M | 79 | CGY503M | 78 | CNA10014 | 76 |
| CGS1002M | 79 | CGS30020M | 79 | CGY504M | 78 | CNA10014N | 75 |
| CGS1004FM | 79 | CGS30021M | 79 | CGY751M | 78 | CNA10016 | 76 |
| CGS1004M | 79 | CGS30022M | 79 | CGY7525M | 78 | CNA10016N | 75 |
| CGS1005M | 79 | CGS30023M | 79 | CGY752M | 78 | CNA10018 | 76 |
| CGS1006M | 79 | CGS30024M | 79 | CGY753M | 78 | CNA10018M | 74 |
| CGS1007M | 79 | CGS3725FM | 79 | CGY754M | 78 | CNA10019 | 76 |
| CGS12510M | 79 | CGS3725M | 79 | CGY755M | 78 | CNA10019M | 74 |
| CGS1256FM | 79 | CGS3726FM | 79 | CH050 | 70 | CNA10019N | 75 |
| CGS1256M | 79 | CGS3726M | 79 | CH075 | 70 | CNA10020 | 76 |
| CGS1257FM | 79 | CGS3727FM | 79 | CH100 | 70 | CNA10020M | 74 |
| CGS1257M | 79 | CGS3727M | 79 | CH125 | 70 | CNA10020N | 75 |
| CGS1258FM | 79 | CGS3728FM | 79 | CH125A | 70 | CNA10021 | 76 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| CNA10021M | 74 | CNA7518 | 76 | CNS377 | 76 | CNS7519M | 74 |
| CNA10021N | 75 | CNA7518M | 74 | CNS379 | 76 | CNS7519N | 75 |
| CNA10022 | 76 | CNA7518N | 75 | CNS5011 | 76 | CNS751UF | 73 |
| CNA10023 | 76 | CNA7519 | 76 | CNS5011B | 73 | CNS7520 | 76 |
| CNA10023M | 74 | CNA7519M | 74 | CNS5011M | 74 | CNS7520M | 74 |
| CNA10023N | 75 | CNA7519N | 75 | CNS5011N | 75 | CNS752UF | 73 |
| CNA10024 | 76 | CNA751UF | 73 | CNS5012 | 76 | CNS757 | 76 |
| CNA12521 | 76 | CNA7520 | 76 | CNS5012B | 73 | CNS757B | 73 |
| CNA12523 | 76 | CNA7520M | 74 | CNS5012M | 74 | CNS757M | 74 |
| CNA12524 | 76 | CNA752UF | 73 | CNS5012N | 75 | CNS757N | 75 |
| CNA12525 | 76 | CNA757 | 76 | CNS5013 | 76 | CO050 | 42 |
| CNA12526 | 76 | CNS10014 | 76 | CNS5013B | 73 | CO075 | 42 |
| CNA3711 | 76 | CNS10014M | 74 | CNS5013M | 74 | CO100 | 42 |
| CNA3712 | 76 | CNS10014N | 75 | CNS5013N | 75 | CO125 | 42 |
| CNA375 | 76 | CNS10016 | 76 | CNS5015 | 76 | CO150 | 42 |
| CNA377 | 76 | CNS10016M | 74 | CNS5015B | 73 | CO200 | 42 |
| CNA379 | 76 | CNS10016N | 75 | CNS5015M | 74 | CO250 | 42 |
| CNA5011 | 76 | CNS10018 | 76 | CNS5017 | 76 | CO300 | 42 |
| CNA5011M | 74 | CNS10018M | 74 | CNS5017M | 74 | CO300L | 42 |
| CNA5011N | 75 | CNS10018N | 75 | CNS501UF | 73 | CO350 | 42 |
| CNA5012 | 76 | CNS10019 | 76 | CNS502UF | 73 | CO400 | 42 |
| CNA5012M | 74 | CNS10019B | 73 | CNS503 | 76 | CP050 | 110 |
| CNA5012N | 75 | CNS10019M | 74 | CNS505 | 76 | CP050A | 110 |
| CNA5013 | 76 | CNS10019N | 75 | CNS507 | 76 | CP050B | 110 |
| CNA5013M | 74 | CNS10020 | 76 | CNS507M | 74 | CP050G | 110 |
| CNA5013N | 75 | CNS10020B | 73 | CNS507N | 75 | CP050W | 110 |
| CNA5015 | 76 | CNS10020M | 74 | CNS509 | 76 | CP075 | 110 |
| CNA5015M | 74 | CNS10020N | 75 | CNS509B | 73 | CP075A | 110 |
| CNA5017 | 76 | CNS10021 | 76 | CNS509M | 74 | CP075B | 110 |
| CNA5017M | 74 | CNS10021B | 73 | CNS509N | 75 | CP075G | 110 |
| CNA501UF | 73 | CNS10021M | 74 | CNS7510 | 76 | CP075W | 110 |
| CNA502UF | 73 | CNS10021N | 75 | CNS7510B | 73 | CP100 | 110 |
| CNA503 | 76 | CNS10022 | 76 | CNS7510M | 74 | CSICP050 | 5 |
| CNA505 | 76 | CNS10022B | 73 | CNS7510N | 75 | CSICP075 | 5 |
| CNA507 | 76 | CNS10022M | 74 | CNS7512 | 76 | CSICP100 | 5 |
| CNA507M | 74 | CNS10022N | 75 | CNS7512B | 73 | CZ11 | 61 |
| CNA507N | 75 | CNS10023 | 76 | CNS7512M | 74 | CZ11P | 61 |
| CNA509 | 76 | CNS10023B | 73 | CNS7512N | 75 | CZ6 | 61 |
| CNA509M | 74 | CNS10023M | 74 | CNS7514 | 76 | CZ6P | 61 |
| CNA509N | 75 | CNS10023N | 75 | CNS7514B | 73 | DC05022I | 77 |
| CNA7510 | 76 | CNS10024 | 76 | CNS7514M | 74 | DC05030I | 77 |
| CNA7510M | 74 | CNS12521 | 76 | CNS7514N | 75 | DC05040I | 77 |
| CNA7510N | 75 | CNS12523 | 76 | CNS7516 | 76 | DC07552I | 77 |
| CNA7512 | 76 | CNS12524 | 76 | CNS7516B | 73 | DC10070I | 77 |
| CNA7512M | 74 | CNS12525 | 76 | CNS7516M | 74 | DC12594I | 77 |
| CNA7512N | 75 | CNS12526 | 76 | CNS7516N | 75 | DC150120I | 77 |
| CNA7514 | 76 | CNS254 | 76 | CNS7518 | 76 | DC200140I | 77 |
| CNA7514M | 74 | CNS256 | 76 | CNS7518B | 73 | DUP1 | 51 |
| CNA7514N | 75 | CNS258 | 76 | CNS7518M | 74 | DUP1DSI | 51 |
| CNA7516 | 76 | CNS3711 | 76 | CNS7518N | 75 | DUP1S | 51 |
| CNA7516M | 74 | CNS3712 | 76 | CNS7519 | 76 | DUP2 | 51 |
| CNA7516N | 75 | CNS375 | 76 | CNS7519B | 73 | DUPS1DSI | 51 |

INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| ECI050 | 45 | F112RG1 | 90 | FG150 | 24 | GBILA200T | 27 |
| ECI075 | 45 | F112RW1 | 90 | FG200 | 24 | GBILA250 | 27 |
| ECI100 | 45 | F112RWG1 | 90 | FG300 | 24 | GBILA250S | 27 |
| ECI125 | 45 | F141S1A1 | 92 | FG400 | 24 | GBILA250T | 27 |
| ECI150 | 45 | F141S1B1 | 92 | G11 | 110 | GBILA300 | 27 |
| ECI200 | 45 | F141S1G1 | 92 | G14 | 110 | GBILA300S | 27 |
| ECI250 | 45 | F141S1W1 | 92 | G21 | 110 | GBILA300T | 27 |
| ECI3006 | 45 | F141S2A1 | 92 | G71 | 110 | GBILA350 | 27 |
| ECI3007 | 45 | F141S2W1 | 92 | GB050 | 25 | GBILA350S | 27 |
| ECON050 | 4 | F141S3A1 | 92 | GB075 | 25 | GBILA350ST | 27 |
| ECON075 | 4 | F141S3G1 | 92 | GB100 | 25 | GBILA350T | 27 |
| ECOP050 | 4 | F141S4G1 | 92 | GB125 | 25 | GBILA400 | 27 |
| ECOP075 | 4 | F151S1G1 | 91 | GB150 | 25 | GBILA400S | 27 |
| EF10504A1 | 84 | F184MG1 | 91 | GB200 | 25 | GBILA400ST | 27 |
| EF10504G1 | 84 | F241S1RG1 | 92 | GB250 | 25 | GBILA400T | 27 |
| EF10504W1 | 84 | F241S1RWG1 | 92 | GB300 | 25 | GBILB050 | 28 |
| EF10754A1 | 84 | F244S1G1 | 93 | GB350 | 25 | GBILB075 | 28 |
| EF10754G1 | 84 | F244S1PG1 | 93 | GB400 | 25 | GBILB100 | 28 |
| EF10754W1 | 84 | F244S2G1 | 93 | GBI050 | 25 | GBILB125 | 28 |
| ER1 | 84 | F244S3G1 | 93 | GBI050T | 26 | GBILB150 | 28 |
| ER10502G1 | 84 | F255S1G1 | 94 | GBI075 | 25 | GBILB200 | 28 |
| ER10504A1 | 84 | F3444S1G0 | 93 | GBI075T | 26 | GBILB250 | 28 |
| ER10504G1 | 84 | FB112RA3 | 90 | GBI100 | 25 | GBILB300 | 28 |
| ER10504W1 | 84 | FB112RB3 | 90 | GBI100T | 26 | GBILB350 | 28 |
| ER10506G1 | 84 | FB112RG3 | 90 | GBI125 | 25 | GBILB400 | 28 |
| ER10752G1 | 84 | FB112RN3 | 90 | GBI125T | 26 | GC1051A1 | 89 |
| ER10754G1 | 84 | FB112RO3 | 90 | GBI150 | 25 | GC1051B1 | 89 |
| ER10756G1 | 84 | FB112RW3 | 90 | GBI150T | 26 | GC1051G1 | 89 |
| ER1A1 | 84 | FB112TDA3 | 90 | GBI200 | 25 | GC1051W1 | 89 |
| ER1G1 | 84 | FB112TDB3 | 90 | GBI200T | 26 | GC1052A1 | 89 |
| ER1W1 | 84 | FB112TDG3 | 90 | GBI250 | 25 | GC1052G1 | 89 |
| ER2A1 | 84 | FB112TDUA3 | 90 | GBI250T | 26 | GC1052W1 | 89 |
| ER2G1 | 84 | FB112TDUG3 | 90 | GBI300 | 25 | GC1053A1 | 89 |
| ER70504A1 | 84 | FB112TDUW3 | 90 | GBI300T | 26 | GC1053B1 | 89 |
| ER70504G1 | 84 | FB112TDW3 | 90 | GBI350 | 25 | GC1053G1 | 89 |
| ER70504U | 84 | FB122RA3 | 91 | GBI350T | 26 | GC1053PG1 | 116 |
| ER70504W1 | 84 | FB122RB3 | 91 | GBI400 | 25 | GC1053PW1 | 116 |
| ER70754G1 | 84 | FB122RG3 | 91 | GBI400T | 26 | GC1053W1 | 89 |
| ES0501 | 10 | FB122RUA3 | 91 | GBILA050 | 27 | GC7051A1 | 89 |
| ES0502 | 10 | FB122RUG3 | 91 | GBILA050T | 27 | GC7051B1 | 89 |
| ES0751 | 10 | FB122RUW3 | 91 | GBILA075 | 27 | GC7051G1 | 89 |
| ES0752 | 10 | FB122RW3 | 91 | GBILA075T | 27 | GC7051U1 | 89 |
| ES1001 | 10 | FBMC037 | 49 | GBILA100 | 27 | GC7051W1 | 89 |
| ES1002 | 10 | FBMC037S | 49 | GBILA100T | 27 | GC7052A1 | 89 |
| ES1251 | 10 | FCA050 | 49 | GBILA125 | 27 | GC7052G1 | 89 |
| ES1252 | 10 | FCA050I | 49 | GBILA125S | 27 | GC7052U1 | 89 |
| ES1501 | 10 | FCA075 | 49 | GBILA125T | 27 | GC7052W1 | 89 |
| ES1502 | 10 | FCA075I | 49 | GBILA150 | 27 | GC7053A1 | 89 |
| ES2001 | 10 | FG050 | 24 | GBILA150S | 27 | GC7053B1 | 89 |
| ES2002 | 10 | FG075 | 24 | GBILA150T | 27 | GC7053G1 | 89 |
| F112RA1 | 90 | FG100 | 24 | GBILA200 | 27 | GC7053PG1 | 116 |
| F112RB1 | 90 | | | GBILA200S | 27 | GC7053PW1 | 116 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|
| GC7053W1 | 89 |
| GL31AA | 106 |
| GL31AAU | 106 |
| GL31AB | 106 |
| GL31ABU | 106 |
| GL31AE | 106 |
| GL31AEU | 106 |
| GL31AEUL | 106 |
| GL31AW | 106 |
| GL31AWU | 106 |
| GL42BA | 106 |
| GL42BAU | 106 |
| GL42BB | 106 |
| GL42BBU | 106 |
| GL42BE | 106 |
| GL42BEU | 106 |
| GL42BEUL | 106 |
| GL42BW | 106 |
| GL42BWU | 106 |
| GL42DA | 106 |
| H1 | 66 |
| H2 | 66 |
| H3 | 66 |
| HDC34S | 58 |
| IBB03 | 68 |
| IBBCU03 | 68 |
| IBBZ03 | 68 |
| IBBZ03Z | 68 |
| JA | 65 |
| K1 | 66 |
| K2 | 66 |
| K3 | 66 |
| KOS050 | 72 |
| KOS075 | 72 |
| KOS100 | 72 |
| KOS125 | 72 |
| KOS150 | 72 |
| KOS200 | 72 |
| KUL | 66 |
| LA1/0 | 69 |
| LA2 | 69 |
| LA250 | 69 |
| LA3/0 | 69 |
| LA4 | 69 |
| LA4C | 69 |
| LA4CP | 69 |
| LB050 | 14 |
| LB050AN | 14 |
| LB050CG | 14 |
| LB075 | 14 |
| LB075AN | 14 |
| LB075CG | 14 |
| LB075CG | 14 |

| Catalog Number | Page Number |
|----------------|-------------|
| LB1/0 | 69 |
| LB100 | 14 |
| LB100AN | 14 |
| LB100CG | 14 |
| LB125 | 14 |
| LB125AN | 14 |
| LB125CG | 14 |
| LB150 | 14 |
| LB150AN | 14 |
| LB150CG | 14 |
| LB2 | 69 |
| LB2/0 | 69 |
| LB200 | 14 |
| LB200AN | 14 |
| LB200CG | 14 |
| LB250 | 14 |
| LB250AN | 14 |
| LB300 | 14 |
| LB300AN | 14 |
| LB350 | 14 |
| LB350AN | 14 |
| LB4 | 69 |
| LB400 | 14 |
| LB400AN | 14 |
| LBC050 | 14 |
| LBC050AN | 14 |
| LBC075 | 14 |
| LBC075AN | 14 |
| LBC100 | 14 |
| LBC100AN | 14 |
| LBC125 | 14 |
| LBC125AN | 14 |
| LBC150 | 14 |
| LBC150AN | 14 |
| LBC200 | 14 |
| LBC200AN | 14 |
| LBMO125CG | 20 |
| LBMO150CG | 20 |
| LBMO200CG | 20 |
| LBSS050 | 11 |
| LBSS050AN | 11 |
| LBSS050CG | 11 |
| LBSS075 | 11 |
| LBSS075AN | 11 |
| LBSS075CG | 11 |
| LBSS100 | 11 |
| LBSS100AN | 11 |
| LBSS100CG | 11 |
| LBSS125 | 11 |
| LBSS125AN | 11 |
| LBSS125CG | 11 |
| LBSS150 | 11 |

| Catalog Number | Page Number |
|----------------|-------------|
| LBSS150AN | 11 |
| LBSS150CG | 11 |
| LBSS200 | 11 |
| LBSS200AN | 11 |
| LBSS200CG | 11 |
| LBSS250 | 11 |
| LBSS250AN | 11 |
| LBSS300 | 11 |
| LBSS300AN | 11 |
| LBSS350 | 11 |
| LBSS350AN | 11 |
| LBSS400 | 11 |
| LBSS400AN | 11 |
| LC050 | 15 |
| LC050AN | 15 |
| LC050CG | 15 |
| LC075 | 15 |
| LC075AN | 15 |
| LC075CG | 15 |
| LC1/0CU | 69 |
| LC100 | 15 |
| LC100AN | 15 |
| LC100CG | 15 |
| LC125 | 15 |
| LC125AN | 15 |
| LC125CG | 15 |
| LC150 | 15 |
| LC150AN | 15 |
| LC150CG | 15 |
| LC200 | 15 |
| LC200AN | 15 |
| LC200CG | 15 |
| LC250 | 15 |
| LC250AN | 15 |
| LC250CU | 69 |
| LC3/0CU | 69 |
| LC300 | 15 |
| LC300AN | 15 |
| LC350 | 15 |
| LC350AN | 15 |
| LC4CU | 69 |
| LC400 | 69 |
| LC400AN | 15 |
| LCC050 | 15 |
| LCC050AN | 15 |
| LCC075 | 15 |
| LCC075AN | 15 |
| LCC100 | 15 |
| LCC100AN | 15 |
| LCC125 | 15 |
| LCC125AN | 15 |
| LCC150 | 15 |

| Catalog Number | Page Number |
|----------------|-------------|
| LCC150AN | 15 |
| LCC200 | 15 |
| LCC200AN | 15 |
| LCSS050 | 11 |
| LCSS050AN | 11 |
| LCSS050CG | 11 |
| LCSS075 | 11 |
| LCSS075AN | 11 |
| LCSS075CG | 11 |
| LCSS100 | 11 |
| LCSS100AN | 11 |
| LCSS100CG | 11 |
| LCSS125 | 11 |
| LCSS125AN | 11 |
| LCSS125CG | 11 |
| LCSS150 | 11 |
| LCSS150AN | 11 |
| LCSS150CG | 11 |
| LCSS200 | 11 |
| LCSS200AN | 11 |
| LCSS200CG | 11 |
| LCSS250 | 11 |
| LCSS250AN | 11 |
| LCSS300 | 11 |
| LCSS300AN | 11 |
| LCSS350 | 11 |
| LCSS350AN | 11 |
| LCSS400 | 11 |
| LCSS400AN | 11 |
| LH1 | 66 |
| LH2 | 66 |
| LH3 | 66 |
| LHG1 | 110 |
| LHG2 | 110 |
| LL050 | 16 |
| LL050AN | 16 |
| LL050CG | 16 |
| LL075 | 16 |
| LL075AN | 16 |
| LL075CG | 16 |
| LL100 | 16 |
| LL100AN | 16 |
| LL100CG | 16 |
| LL125 | 16 |
| LL125AN | 16 |
| LL125CG | 16 |
| LL150 | 16 |
| LL150AN | 16 |
| LL150CG | 16 |
| LL200 | 16 |
| LL200AN | 16 |
| LL200CG | 16 |

INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| LL250 | 16 | LNC250 | 35 | LRSS125AN | 12 | LTA125I | 54 |
| LL250AN | 16 | LNC300 | 35 | LRSS125CG | 12 | LTA150 | 54 |
| LL300 | 16 | LNC350 | 35 | LRSS150 | 12 | LTA150I | 54 |
| LL300AN | 16 | LNC400 | 35 | LRSS150AN | 12 | LTA200 | 54 |
| LL350 | 16 | LR050 | 17 | LRSS150CG | 12 | LTA200I | 54 |
| LL350AN | 16 | LR050AN | 17 | LRSS200 | 12 | LTA250 | 54 |
| LL400 | 16 | LR050CG | 17 | LRSS200AN | 12 | LTA250I | 54 |
| LL400AN | 16 | LR075 | 17 | LRSS200CG | 12 | LTA300 | 54 |
| LLC050 | 16 | LR075AN | 17 | LRSS250 | 12 | LTA300I | 54 |
| LLC050AN | 16 | LR075CG | 17 | LRSS250AN | 12 | LTA350 | 54 |
| LLC075 | 16 | LR100 | 17 | LRSS300 | 12 | LTA350I | 54 |
| LLC075AN | 16 | LR100AN | 17 | LRSS300AN | 12 | LTA400 | 54 |
| LLC100 | 16 | LR100CG | 17 | LRSS350 | 12 | LTA400I | 54 |
| LLC100AN | 16 | LR125 | 17 | LRSS350AN | 12 | LTC050 | 18 |
| LLC125 | 16 | LR125AN | 17 | LRSS400 | 12 | LTC050AN | 18 |
| LLC125AN | 16 | LR125CG | 17 | LRSS400AN | 12 | LTC075 | 18 |
| LLC150 | 16 | LR150 | 17 | LT050 | 18 | LTC075AN | 18 |
| LLC150AN | 16 | LR150AN | 17 | LT050AN | 18 | LTC100 | 18 |
| LLC200 | 16 | LR150CG | 17 | LT050CG | 18 | LTC100AN | 18 |
| LLC200AN | 16 | LR200 | 17 | LT075 | 18 | LTC125 | 18 |
| LLSS050 | 12 | LR200AN | 17 | LT075AN | 18 | LTC125AN | 18 |
| LLSS050AN | 12 | LR200CG | 17 | LT075CG | 18 | LTC150 | 18 |
| LLSS050CG | 12 | LR250 | 17 | LT100 | 18 | LTC150AN | 18 |
| LLSS075 | 12 | LR250AN | 17 | LT100AN | 18 | LTC200 | 18 |
| LLSS075AN | 12 | LR300 | 17 | LT100CG | 18 | LTC200AN | 18 |
| LLSS075CG | 12 | LR300AN | 17 | LT125 | 18 | LTS037 | 54 |
| LLSS100 | 12 | LR350 | 17 | LT125AN | 18 | LTS037I | 54 |
| LLSS100AN | 12 | LR350AN | 17 | LT125CG | 18 | LTS050 | 54 |
| LLSS100CG | 12 | LR400 | 17 | LT150 | 18 | LTS050I | 54 |
| LLSS125 | 12 | LR400AN | 17 | LT150AN | 18 | LTS075 | 54 |
| LLSS125AN | 12 | LRC050 | 17 | LT150CG | 18 | LTS075I | 54 |
| LLSS125CG | 12 | LRC050AN | 17 | LT200 | 18 | LTS075U | 54 |
| LLSS150 | 12 | LRC075 | 17 | LT200AN | 18 | LTS100 | 54 |
| LLSS150AN | 12 | LRC075AN | 17 | LT200CG | 18 | LTS100I | 54 |
| LLSS150CG | 12 | LRC100 | 17 | LT250 | 18 | LTS100IU | 54 |
| LLSS200 | 12 | LRC100AN | 17 | LT250AN | 18 | LTS125 | 54 |
| LLSS200AN | 12 | LRC125 | 17 | LT300 | 18 | LTS125I | 54 |
| LLSS200CG | 12 | LRC125AN | 17 | LT300AN | 18 | LTS125IU | 54 |
| LLSS250 | 12 | LRC150 | 17 | LT350 | 18 | LTS150 | 54 |
| LLSS250AN | 12 | LRC150AN | 17 | LT350AN | 18 | LTS150I | 54 |
| LLSS300 | 12 | LRC200 | 17 | LT400 | 18 | LTS200 | 54 |
| LLSS300AN | 12 | LRC200AN | 17 | LT400AN | 18 | LTS200I | 54 |
| LLSS350 | 12 | LRSS050 | 12 | LTA037 | 54 | LTS250 | 54 |
| LLSS350AN | 12 | LRSS050AN | 12 | LTA037I | 54 | LTS250I | 54 |
| LLSS400 | 12 | LRSS050CG | 12 | LTA050 | 54 | LTS300 | 54 |
| LLSS400AN | 12 | LRSS075 | 12 | LTA050I | 54 | LTS300I | 54 |
| LNC050 | 35 | LRSS075AN | 12 | LTA075 | 54 | LTS350 | 54 |
| LNC075 | 35 | LRSS075CG | 12 | LTA075I | 54 | LTS350I | 54 |
| LNC100 | 35 | LRSS100 | 12 | LTA075U | 54 | LTS400 | 54 |
| LNC125 | 35 | LRSS100AN | 12 | LTA100 | 54 | LTS400I | 54 |
| LNC150 | 35 | LRSS100CG | 12 | LTA100I | 54 | LTSS050 | 13 |
| LNC200 | 35 | LRSS125 | 12 | LTA125 | 54 | LTSS050AN | 13 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| LTSS050CG | 13 | MB4 | 71 | MCS200U | 70 | MGBG200SS | 26 |
| LTSS075 | 13 | MC151G1 | 85 | MCS250 | 70 | MGBG250 | 25 |
| LTSS075AN | 13 | MC1M1A1 | 85 | MCS250L | 70 | MGBG250SS | 26 |
| LTSS075CG | 13 | MC1M1G1 | 85 | MCS250U | 70 | MGBG300 | 25 |
| LTSS100 | 13 | MC1M1W1 | 85 | MCS300 | 70 | MGBG300SS | 26 |
| LTSS100AN | 13 | MC1M2A1 | 85 | MCS300U | 70 | MGBG350 | 25 |
| LTSS100CG | 13 | MC1M2G1 | 85 | MCS350 | 70 | MGBG350SS | 26 |
| LTSS125 | 13 | MC1M2W1 | 85 | MCS350U | 70 | MGBG400 | 25 |
| LTSS125AN | 13 | MC1M3A1 | 85 | MCS400 | 70 | MGBG400SS | 26 |
| LTSS125CG | 13 | MC1M3G1 | 85 | MCS400U | 70 | MGBG500 | 25 |
| LTSS150 | 13 | MC1M3W1 | 85 | MDA037 | 47 | MGBG500SS | 26 |
| LTSS150AN | 13 | MC251G1 | 86 | MFF050 | 33 | MGBG600 | 25 |
| LTSS150CG | 13 | MC252G1 | 86 | MFF075 | 33 | MGBG600SS | 26 |
| LTSS200 | 13 | MC2MMA1 | 86 | MFF100 | 33 | MGBGLA050 | 27 |
| LTSS200AN | 13 | MC2MMG1 | 86 | MFF125 | 33 | MGBGLA050X | 27 |
| LTSS200CG | 13 | MC2MMW1 | 86 | MFF150 | 33 | MGBGLA075 | 27 |
| LTSS250 | 13 | MCB050 | 37 | MFF200 | 33 | MGBGLA075X | 27 |
| LTSS250AN | 13 | MCB075 | 37 | MGB050 | 25 | MGBGLA100 | 27 |
| LTSS300 | 13 | MCB100 | 37 | MGB050T | 26 | MGBGLA100X | 27 |
| LTSS300AN | 13 | MCB125 | 37 | MGB075 | 25 | MGBGLA125 | 27 |
| LTSS350 | 13 | MCB150 | 37 | MGB075T | 26 | MGBGLA125S | 27 |
| LTSS350AN | 13 | MCB200 | 37 | MGB100 | 25 | MGBGLA125X | 27 |
| LTSS400 | 13 | MCB250 | 37 | MGB100T | 26 | MGBGLA125Y | 27 |
| LTSS400AN | 13 | MCB300 | 37 | MGB125 | 25 | MGBGLA150 | 27 |
| MASQ050 | 47 | MCB350 | 37 | MGB125T | 26 | MGBGLA150S | 27 |
| MASQ050I | 47 | MCB400 | 37 | MGB150 | 25 | MGBGLA150X | 27 |
| MASQ075 | 47 | MCN050 | 32 | MGB150T | 26 | MGBGLA150Y | 27 |
| MASQ075I | 47 | MCN050I | 32 | MGB200 | 25 | MGBGLA200 | 27 |
| MASQ100 | 47 | MCN075 | 32 | MGB200T | 26 | MGBGLA200S | 27 |
| MASQ100I | 47 | MCN075I | 32 | MGB250 | 25 | MGBGLA200X | 27 |
| MASQ125 | 47 | MCN100 | 32 | MGB250T | 26 | MGBGLA200Y | 27 |
| MASQ125I | 47 | MCN100I | 32 | MGB300 | 25 | MGBGLA250 | 27 |
| MASQ150 | 47 | MCN125 | 32 | MGB300T | 26 | MGBGLA250S | 27 |
| MASQ150I | 47 | MCN125I | 32 | MGB350 | 25 | MGBGLA250T | 27 |
| MASQ200 | 47 | MCN150 | 32 | MGB350T | 26 | MGBGLA250X | 27 |
| MASQ200I | 47 | MCN150I | 32 | MGB400 | 25 | MGBGLA250Y | 27 |
| MASQ250 | 47 | MCN200 | 32 | MGB400T | 26 | MGBGLA250Z | 27 |
| MASQ250I | 47 | MCN200I | 32 | MGB500 | 25 | MGBGLA300 | 27 |
| MASQ300 | 47 | MCN250 | 32 | MGB500T | 26 | MGBGLA300S | 27 |
| MASQ300I | 47 | MCN250I | 32 | MGB600 | 25 | MGBGLA300T | 27 |
| MASQ350 | 47 | MCN300 | 32 | MGB600T | 26 | MGBGLA300X | 27 |
| MASQ350I | 47 | MCN300I | 32 | MGBG050 | 25 | MGBGLA300Y | 27 |
| MASQ400 | 47 | MCN350 | 32 | MGBG050SS | 26 | MGBGLA300Z | 27 |
| MASQ400I | 47 | MCN350I | 32 | MGBG075 | 25 | MGBGLA350 | 27 |
| MB1 | 71 | MCN400 | 32 | MGBG075SS | 26 | MGBGLA350S | 27 |
| MB1A | 71 | MCN400I | 32 | MGBG100 | 25 | MGBGLA350T | 27 |
| MB1AS | 71 | MCN500 | 32 | MGBG100SS | 26 | MGBGLA350X | 27 |
| MB1B | 71 | MCN500I | 32 | MGBG125 | 25 | MGBGLA350Y | 27 |
| MB1BS | 71 | MCN600 | 32 | MGBG125SS | 26 | MGBGLA350Z | 27 |
| MB1S | 71 | MCN600I | 32 | MGBG150 | 25 | MGBGLA400 | 27 |
| MB2 | 71 | MCS200 | 70 | MGBG150SS | 26 | MGBGLA400S | 27 |
| MB3 | 71 | MCS200L | 70 | MGBG200 | 25 | MGBGLA400T | 27 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| MGBGLA400X | 27 | MGBGLC400Z | 29 | MGBILA250S | 27 | MGBILC100X | 29 |
| MGBGLA400Y | 27 | MGBGLC500 | 29 | MGBILA250T | 27 | MGBILC125 | 29 |
| MGBGLA400Z | 27 | MGBGLC500T | 29 | MGBILA250X | 27 | MGBILC125S | 29 |
| MGBGLA500 | 27 | MGBGLC500X | 29 | MGBILA250Y | 27 | MGBILC125X | 29 |
| MGBGLA500T | 27 | MGBGLC500Y | 29 | MGBILA250Z | 27 | MGBILC125Y | 29 |
| MGBGLA500X | 27 | MGBGLC600 | 29 | MGBILA300 | 27 | MGBILC150 | 29 |
| MGBGLA500Y | 27 | MGBGLC600T | 29 | MGBILA300S | 27 | MGBILC150S | 29 |
| MGBGLA600 | 27 | MGBGLC600X | 29 | MGBILA300T | 27 | MGBILC150X | 29 |
| MGBGLA600T | 27 | MGBGLC600Y | 29 | MGBILA300X | 27 | MGBILC150Y | 29 |
| MGBGLA600X | 27 | MGBI050 | 25 | MGBILA300Y | 27 | MGBILC200 | 29 |
| MGBGLA600Y | 27 | MGBI050SS | 26 | MGBILA300Z | 27 | MGBILC200S | 29 |
| MGBGLC050 | 29 | MGBI075 | 25 | MGBILA350 | 27 | MGBILC200X | 29 |
| MGBGLC050X | 29 | MGBI075SS | 26 | MGBILA350S | 27 | MGBILC200Y | 29 |
| MGBGLC075 | 29 | MGBI100 | 25 | MGBILA350T | 27 | MGBILC250 | 29 |
| MGBGLC075X | 29 | MGBI100SS | 26 | MGBILA350X | 27 | MGBILC250S | 29 |
| MGBGLC100 | 29 | MGBI125 | 25 | MGBILA350Y | 27 | MGBILC250T | 29 |
| MGBGLC100X | 29 | MGBI125SS | 26 | MGBILA350Z | 27 | MGBILC250X | 29 |
| MGBGLC125 | 29 | MGBI150 | 25 | MGBILA400 | 27 | MGBILC250Y | 29 |
| MGBGLC125S | 29 | MGBI150SS | 26 | MGBILA400S | 27 | MGBILC250Z | 29 |
| MGBGLC125X | 29 | MGBI200 | 25 | MGBILA400T | 27 | MGBILC300 | 29 |
| MGBGLC125Y | 29 | MGBI200SS | 26 | MGBILA400X | 27 | MGBILC300S | 29 |
| MGBGLC150 | 29 | MGBI250 | 25 | MGBILA400Y | 27 | MGBILC300T | 29 |
| MGBGLC150S | 29 | MGBI250SS | 26 | MGBILA400Z | 27 | MGBILC300X | 29 |
| MGBGLC150X | 29 | MGBI300 | 25 | MGBILA500 | 27 | MGBILC300Y | 29 |
| MGBGLC150Y | 29 | MGBI300SS | 26 | MGBILA500T | 27 | MGBILC300Z | 29 |
| MGBGLC200 | 29 | MGBI350 | 25 | MGBILA500X | 27 | MGBILC350 | 29 |
| MGBGLC200S | 29 | MGBI350SS | 26 | MGBILA500Y | 27 | MGBILC350S | 29 |
| MGBGLC200X | 29 | MGBI400 | 25 | MGBILA600 | 27 | MGBILC350T | 29 |
| MGBGLC200Y | 29 | MGBI400SS | 26 | MGBILA600T | 27 | MGBILC350X | 29 |
| MGBGLC250 | 29 | MGBI500 | 25 | MGBILA600X | 27 | MGBILC350Y | 29 |
| MGBGLC250S | 29 | MGBI500SS | 26 | MGBILA600Y | 27 | MGBILC350Z | 29 |
| MGBGLC250T | 29 | MGBI600 | 25 | MGBILB050 | 28 | MGBILC400 | 29 |
| MGBGLC250X | 29 | MGBI600SS | 26 | MGBILB075 | 28 | MGBILC400S | 29 |
| MGBGLC250Y | 29 | MGBILA050 | 27 | MGBILB100 | 28 | MGBILC400T | 29 |
| MGBGLC250Z | 29 | MGBILA050X | 27 | MGBILB125 | 28 | MGBILC400X | 29 |
| MGBGLC300 | 29 | MGBILA075 | 27 | MGBILB150 | 28 | MGBILC400Y | 29 |
| MGBGLC300S | 29 | MGBILA075X | 27 | MGBILB200 | 28 | MGBILC400Z | 29 |
| MGBGLC300T | 29 | MGBILA100 | 27 | MGBILB250 | 28 | MGBILC500 | 29 |
| MGBGLC300X | 29 | MGBILA100X | 27 | MGBILB250S | 28 | MGBILC500T | 29 |
| MGBGLC300Y | 29 | MGBILA125 | 27 | MGBILB300 | 28 | MGBILC500X | 29 |
| MGBGLC300Z | 29 | MGBILA125S | 27 | MGBILB300S | 28 | MGBILC500Y | 29 |
| MGBGLC350 | 29 | MGBILA125X | 27 | MGBILB350 | 28 | MGBILC600 | 29 |
| MGBGLC350S | 29 | MGBILA125Y | 27 | MGBILB350S | 28 | MGBILC600T | 29 |
| MGBGLC350T | 29 | MGBILA150 | 27 | MGBILB400 | 28 | MGBILC600X | 29 |
| MGBGLC350X | 29 | MGBILA150S | 27 | MGBILB400S | 28 | MGBILC600Y | 29 |
| MGBGLC350Y | 29 | MGBILA150X | 27 | MGBILB500 | 28 | MJ050 | 71 |
| MGBGLC350Z | 29 | MGBILA150Y | 27 | MGBILB600 | 28 | MJ075 | 71 |
| MGBGLC400 | 29 | MGBILA200 | 27 | MGBILC050 | 29 | MJ100 | 71 |
| MGBGLC400S | 29 | MGBILA200S | 27 | MGBILC050X | 29 | MLB050 | 21 |
| MGBGLC400T | 29 | MGBILA200X | 27 | MGBILC075 | 29 | MLB075 | 21 |
| MGBGLC400X | 29 | MGBILA200Y | 27 | MGBILC075X | 29 | MLB100 | 21 |
| MGBGLC400Y | 29 | MGBILA250 | 27 | MGBILC100 | 29 | MLB125 | 21 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| MLB150 | 21 | MLTA150 | 56 | MLTS200IL | 57 | MLTY300I | 56 |
| MLB200 | 21 | MLTA150C | 57 | MLTS200L | 57 | MLTY300IC | 57 |
| MLB250 | 21 | MLTA150I | 56 | MLTS250 | 56 | MLTY300IL | 57 |
| MLB300 | 21 | MLTA150IC | 57 | MLTS250C | 57 | MLTY300L | 57 |
| MLB350 | 21 | MLTA150IL | 57 | MLTS250I | 56 | MLTY350 | 56 |
| MLB400 | 21 | MLTA150L | 57 | MLTS250IC | 57 | MLTY350C | 57 |
| MLC050 | 22 | MLTA200 | 56 | MLTS250IL | 57 | MLTY350I | 56 |
| MLC075 | 22 | MLTA200C | 57 | MLTS250L | 57 | MLTY350IC | 57 |
| MLC100 | 22 | MLTA200I | 56 | MLTS300 | 56 | MLTY350IL | 57 |
| MLC125 | 22 | MLTA200IC | 57 | MLTS300C | 57 | MLTY350L | 57 |
| MLC150 | 22 | MLTA200IL | 57 | MLTS300I | 56 | MLTY400 | 56 |
| MLC200 | 22 | MLTA200L | 57 | MLTS300IC | 57 | MLTY400C | 57 |
| MLC250 | 22 | MLTA250 | 56 | MLTS300IL | 57 | MLTY400I | 56 |
| MLC300 | 22 | MLTA250C | 57 | MLTS300L | 57 | MLTY400IC | 57 |
| MLC350 | 22 | MLTA250I | 56 | MLTS350 | 56 | MLTY400IL | 57 |
| MLC400 | 22 | MLTA250IC | 57 | MLTS350C | 57 | MLTY400L | 57 |
| MLL050 | 21 | MLTA250IL | 57 | MLTS350I | 56 | MLX050 | 22 |
| MLL075 | 21 | MLTA250L | 57 | MLTS350IC | 57 | MLX075 | 22 |
| MLL100 | 21 | MLTA300 | 56 | MLTS350IL | 57 | MLX100 | 22 |
| MLL125 | 21 | MLTA300C | 57 | MLTS350L | 57 | MLX125 | 22 |
| MLL150 | 21 | MLTA300I | 56 | MLTS400 | 56 | MLX150 | 22 |
| MLL200 | 21 | MLTA300IC | 57 | MLTS400C | 57 | MLX200 | 22 |
| MLL250 | 21 | MLTA300IL | 57 | MLTS400I | 56 | MNTA037 | 56 |
| MLL300 | 21 | MLTA300L | 57 | MLTS400IC | 57 | MNTA037C | 57 |
| MLL350 | 21 | MLTA350 | 56 | MLTS400IL | 57 | MNTA037I | 56 |
| MLL400 | 21 | MLTA350C | 57 | MLTS400L | 57 | MNTA037IC | 57 |
| MLR050 | 21 | MLTA350I | 56 | MLTY125 | 56 | MNTA037IL | 57 |
| MLR075 | 21 | MLTA350IC | 57 | MLTY125C | 57 | MNTA037L | 57 |
| MLR100 | 21 | MLTA350IL | 57 | MLTY125I | 56 | MNTA050 | 56 |
| MLR125 | 21 | MLTA350L | 57 | MLTY125IC | 57 | MNTA050C | 57 |
| MLR150 | 21 | MLTA400 | 56 | MLTY125IL | 57 | MNTA050I | 56 |
| MLR200 | 21 | MLTA400C | 57 | MLTY125L | 57 | MNTA050IC | 57 |
| MLR250 | 21 | MLTA400I | 56 | MLTY150 | 56 | MNTA050IL | 57 |
| MLR300 | 21 | MLTA400IC | 57 | MLTY150C | 57 | MNTA050L | 57 |
| MLR350 | 21 | MLTA400IL | 57 | MLTY150I | 56 | MNTA075 | 56 |
| MLR400 | 21 | MLTA400L | 57 | MLTY150IC | 57 | MNTA075C | 57 |
| MLT050 | 22 | MLTS125 | 56 | MLTY150IL | 57 | MNTA075I | 56 |
| MLT075 | 22 | MLTS125C | 57 | MLTY150L | 57 | MNTA075IC | 57 |
| MLT100 | 22 | MLTS125I | 56 | MLTY200 | 56 | MNTA075IL | 57 |
| MLT125 | 22 | MLTS125IC | 57 | MLTY200C | 57 | MNTA075L | 57 |
| MLT150 | 22 | MLTS125IL | 57 | MLTY200I | 56 | MNTA100 | 56 |
| MLT200 | 22 | MLTS125L | 57 | MLTY200IC | 57 | MNTA100C | 57 |
| MLT250 | 22 | MLTS150 | 56 | MLTY200IL | 57 | MNTA100I | 56 |
| MLT300 | 22 | MLTS150C | 57 | MLTY200L | 57 | MNTA100IC | 57 |
| MLT350 | 22 | MLTS150I | 56 | MLTY250 | 56 | MNTA100IL | 57 |
| MLT400 | 22 | MLTS150IC | 57 | MLTY250C | 57 | MNTS037 | 56 |
| MLTA125 | 56 | MLTS150IL | 57 | MLTY250I | 56 | MNTS037C | 57 |
| MLTA125C | 57 | MLTS150L | 57 | MLTY250IC | 57 | MNTS037I | 56 |
| MLTA125I | 56 | MLTS200 | 56 | MLTY250IL | 57 | MNTS037IC | 57 |
| MLTA125IC | 57 | MLTS200C | 57 | MLTY250L | 57 | MNTS037IL | 57 |
| MLTA125IL | 57 | MLTS200I | 56 | MLTY300 | 56 | MNTS037L | 57 |
| MLTA125L | 57 | MLTS200IC | 57 | MLTY300C | 57 | | |

INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| MNTS050 | 56 | MS400 | 37 | NGT300 | 24 | PE100RRG | 30 |
| MNTS050C | 57 | MSSQ050 | 47 | NGT400 | 24 | PE125CCG | 9 |
| MNTS050I | 56 | MSSQ050I | 47 | NP01 | 72 | PE125EB | 9 |
| MNTS050IC | 57 | MSSQ075 | 47 | NP02 | 72 | PE125EBG | 9 |
| MNTS050IL | 57 | MSSQ075I | 47 | OCC050 | 8 | PE125EE | 9 |
| MNTS050L | 57 | MSSQ100 | 47 | OCC075 | 8 | PE125EEG | 9 |
| MNTS075 | 56 | MSSQ100I | 47 | OCC100 | 8 | PE125RBG | 30 |
| MNTS075C | 57 | MSSQ125 | 47 | OCS050 | 8 | PE125RRG | 30 |
| MNTS075I | 56 | MSSQ125I | 47 | OCS075 | 8 | PLTA037 | 55 |
| MNTS075IC | 57 | MSSQ150 | 47 | OCS100 | 8 | PLTA050 | 55 |
| MNTS075IL | 57 | MSSQ150I | 47 | ON075 | 34 | PLTA050B | 55 |
| MNTS075L | 57 | MSSQ200 | 47 | ON100 | 34 | PLTA075 | 55 |
| MNTS100 | 56 | MSSQ200I | 47 | ON125 | 34 | PLTA075B | 55 |
| MNTS100C | 57 | MSSQ250 | 47 | ON150 | 34 | PLTA100 | 55 |
| MNTS100I | 56 | MSSQ250I | 47 | ON200 | 34 | PLTA100B | 55 |
| MNTS100IC | 57 | MSSQ300 | 47 | ON250 | 34 | PLTS037 | 55 |
| MNTS100IL | 57 | MSSQ300I | 47 | ON300 | 34 | PLTS050 | 55 |
| MNTS100L | 57 | MSSQ350 | 47 | PB050 | 39 | PLTS050B | 55 |
| MNTY037 | 56 | MSSQ350I | 47 | PB075 | 39 | PLTS075 | 55 |
| MNTY037C | 57 | MSSQ400 | 47 | PB100 | 39 | PLTS100 | 55 |
| MNTY037I | 56 | MSSQ400I | 47 | PB125 | 39 | PLTS100B | 55 |
| MNTY037IC | 57 | MSWDD01A1 | 121 | PB150 | 39 | PLTS125 | 55 |
| MNTY037IL | 57 | MSWDD01G1 | 121 | PB200 | 39 | PLTS125B | 55 |
| MNTY037L | 57 | MSWDD01W1 | 121 | PB250 | 39 | PNMR037 | 44 |
| MNTY050 | 56 | MT1 | 43 | PB300 | 39 | PNMR075 | 44 |
| MNTY050C | 57 | MT2 | 43 | PB350 | 39 | R1 | 58 |
| MNTY050I | 56 | MT3 | 43 | PB400 | 39 | R10 | 58 |
| MNTY050IC | 57 | MT4 | 43 | PE050CCG | 9 | R11 | 58 |
| MNTY050IL | 57 | MTPC050 | 33 | PE050EB | 9 | R11SS | 58 |
| MNTY050L | 57 | MTPC075 | 33 | PE050EBG | 9 | R11USS | 58 |
| MNTY075 | 56 | MTPC100 | 33 | PE050EE | 9 | R2 | 58 |
| MNTY075C | 57 | MTPC125 | 33 | PE050EEG | 9 | R22 | 58 |
| MNTY075I | 56 | MTPC150 | 33 | PE050RB | 30 | R22SS | 58 |
| MNTY075IC | 57 | MTPC200 | 33 | PE050RBG | 30 | R3 | 58 |
| MNTY075IL | 57 | MTPC250 | 33 | PE050RR | 30 | R33 | 58 |
| MNTY075L | 57 | MTPC300 | 33 | PE050RRG | 30 | R33SS | 58 |
| MNTY100 | 56 | MTPC350 | 33 | PE075CCG | 9 | RB075/050 | 35 |
| MNTY100C | 57 | MTPC400 | 33 | PE075EB | 9 | RB100/050 | 35 |
| MNTY100I | 56 | MTPC500 | 33 | PE075EBG | 9 | RB100/075 | 35 |
| MNTY100IC | 57 | MTPC600 | 33 | PE075EE | 9 | RBC1D | 59 |
| MNTY100IL | 57 | NG050 | 24 | PE075EEG | 9 | RBC2D | 59 |
| MNTY100L | 57 | NG075 | 24 | PE075RB | 30 | RBC2SS | 59 |
| MS037 | 37 | NG100 | 24 | PE075RBG | 30 | RBC3D | 59 |
| MS050 | 37 | NG150 | 24 | PE075RR | 30 | RBC4D | 59 |
| MS075 | 37 | NG200 | 24 | PE075RRG | 30 | RS0501 | 38 |
| MS100 | 37 | NG300 | 24 | PE100CCG | 9 | RS0502 | 38 |
| MS125 | 37 | NG400 | 24 | PE100EB | 9 | RS0751 | 38 |
| MS150 | 37 | NGT050 | 24 | PE100EBG | 9 | RS0752 | 38 |
| MS200 | 37 | NGT075 | 24 | PE100EE | 9 | RS1001 | 38 |
| MS250 | 37 | NGT100 | 24 | PE100EEG | 9 | RS1002 | 38 |
| MS300 | 37 | NGT150 | 24 | PE100RBG | 30 | RS1251 | 38 |
| MS350 | 37 | NGT200 | 24 | | | | |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| RS1252 | 38 | SCEH2 | 42 | SICP100 | 48 | SS400 | 44 |
| RS1501 | 38 | SCON050 | 1 | SICP125 | 48 | SSC050 | 23 |
| RS1502 | 38 | SCON050I | 1 | SICP150 | 48 | SSC075 | 23 |
| RS2001 | 38 | SCON075 | 1 | SICP200 | 48 | SSC100 | 23 |
| RS2002 | 38 | SCON075I | 1 | SL1A | 104 | SSC150 | 23 |
| RS2501 | 38 | SCON100 | 1 | SL1B | 104 | SSC200 | 23 |
| RS2502 | 38 | SCON100I | 1 | SL1E | 104 | SSC300 | 23 |
| RS3001 | 38 | SCON125 | 1 | SL1G | 104 | SSC400 | 23 |
| RS3002 | 38 | SCON125I | 1 | SL2A | 104 | SSQ037 | 47 |
| RS3502 | 38 | SCON150 | 1 | SLB050 | 19 | SSQ037I | 47 |
| RS4002 | 38 | SCON150I | 1 | SLB050CN | 19 | SSQ050 | 47 |
| RSCN050 | 36 | SCON200 | 1 | SLB075 | 19 | SSQ050I | 47 |
| RSCN075 | 36 | SCON200I | 1 | SLB075CN | 19 | SSQ075 | 47 |
| RW075/050 | 40 | SCON250 | 1 | SLB100 | 19 | SSQ075I | 47 |
| RW100/050 | 40 | SCON250I | 1 | SLB100CN | 19 | SSQ100 | 47 |
| RW100/075 | 40 | SCON300 | 1 | SLB125 | 19 | SSQ100I | 47 |
| RW125/050 | 40 | SCON300I | 1 | SLB150 | 19 | SSQ125 | 47 |
| RW125/075 | 40 | SCON350 | 1 | SLB200 | 19 | SSQ125I | 47 |
| RW125/100 | 40 | SCON350I | 1 | SLBXL125 | 19 | SSQ150 | 47 |
| RW150/050 | 40 | SCON400 | 1 | SLBXL200 | 19 | SSQ150I | 47 |
| RW150/075 | 40 | SCON400I | 1 | SLL1A | 104 | SSQ150U | 47 |
| RW150/100 | 40 | SCOP050 | 1 | SLL1E | 104 | SSQ200 | 47 |
| RW150/125 | 40 | SCOP075 | 1 | SLL1G | 104 | SSQ200I | 47 |
| RW200/050 | 40 | SCOP100 | 1 | SLL1W | 104 | SSQ200U | 47 |
| RW200/075 | 40 | SCOP125 | 1 | SLN037 | 39 | SSQ250 | 47 |
| RW200/100 | 40 | SCOP150 | 1 | SLN050 | 39 | SSQ250I | 47 |
| RW200/125 | 40 | SCOP200 | 1 | SLN075 | 39 | SSQ300 | 47 |
| RW200/150 | 40 | SCOP250 | 1 | SLN100 | 39 | SSQ300I | 47 |
| RW250/050 | 40 | SCOP300 | 1 | SLN125 | 39 | SSQ350 | 47 |
| RW250/075 | 40 | SCOP350 | 1 | SLN150 | 39 | SSQ350I | 47 |
| RW250/100 | 40 | SCOP400 | 1 | SLN200 | 39 | SSQ350U | 47 |
| RW250/125 | 40 | SEC125 | 41 | SLN250 | 39 | SSQ400 | 47 |
| RW250/150 | 40 | SEC150 | 41 | SLN300 | 39 | SSQ400I | 47 |
| RW250/200 | 40 | SEC200 | 41 | SLN400 | 39 | TGO11A | 67 |
| RX037 | 41 | SICN037 | 48 | SPC050/075 | 45 | TGO11ATP | 67 |
| RX037S | 41 | SICN037I | 48 | SPC100 | 45 | TGO20A | 67 |
| RX037U | 41 | SICN037S | 48 | SPC125 | 45 | TGO20ATP | 67 |
| RX075 | 41 | SICN050 | 48 | SPC150 | 45 | TGT12A | 67 |
| RX075S | 41 | SICN050I | 48 | SPC200 | 45 | TGT12ATP | 67 |
| RX100 | 41 | SICN050S | 48 | SPK2 | 104 | TGT21A | 67 |
| RX100U | 41 | SICN075 | 48 | SRE050 | 36 | TGT21ATP | 67 |
| RX125 | 41 | SICN075I | 48 | SRE075 | 36 | TH050 | 43 |
| RX150 | 41 | SICN100 | 48 | SS050 | 44 | TH075 | 43 |
| RX200 | 41 | SICN100I | 48 | SS075 | 44 | TH100 | 43 |
| SAD037 | 51 | SICN125 | 48 | SS100 | 44 | TH125 | 43 |
| SAD037DC | 51 | SICN125I | 48 | SS125 | 44 | TH150 | 43 |
| SAD037S | 51 | SICN150 | 48 | SS150 | 44 | TH200 | 43 |
| SAD050DC | 51 | SICN150I | 48 | SS200 | 44 | TH250 | 43 |
| SAD075DC | 51 | SICN200 | 48 | SS250 | 44 | TH300 | 43 |
| SAD100DC | 51 | SICN200I | 48 | SS300 | 44 | TH300L | 43 |
| SC050 | 52 | SICP050 | 48 | SS300L | 44 | TH350 | 43 |
| SCEH1 | 42 | SICP075 | 48 | SS350 | 44 | TH400 | 43 |

INDEX

| Catalog Number | Page Number |
|----------------|-------------|----------------|-------------|----------------|-------------|----------------|-------------|
| TH500 | 43 | VC901ALC | 107 | VW101BGC | 108 | W7514M | 80 |
| TH600 | 43 | VC901B | 109 | VW201BGC | 108 | W7514N | 80 |
| TPC050 | 33 | VC901BGC | 107 | VW201CGC | 108 | W7516M | 80 |
| TPC075 | 33 | VC901BLA | 107 | VW900BGC | 108 | W7516N | 80 |
| TPC100 | 33 | VC901BLC | 107 | VW901ALC | 108 | W7518M | 80 |
| TPC125 | 33 | VC901BLE | 107 | VW901B | 109 | W7519M | 80 |
| TPC150 | 33 | VC901BLL | 107 | VW901BGC | 108 | W7520M | 80 |
| TPC200 | 33 | VC901BLR | 107 | VW901BLA | 108 | WC1004 | 46 |
| TPC250 | 33 | VC901C | 109 | VW901BLC | 108 | WC1006 | 46 |
| TPC300 | 33 | VC901CGC | 107 | VW901BLE | 108 | WC1008 | 46 |
| TPC350 | 33 | VGC1 | 109 | VW901BLL | 108 | WC1251 | 46 |
| TPC400 | 33 | VGGC1 | 109 | VW901BLR | 108 | WC1252 | 46 |
| UFC050 | 46 | VGGC2 | 109 | VW901C | 109 | WC1253 | 46 |
| UFC075 | 46 | VGGC3 | 109 | VW901CGC | 108 | WC15010 | 46 |
| VAP1 | 109 | VGLA1 | 109 | VX111BGC | 108 | WC15020 | 46 |
| VB111BGC | 107 | VGLC1 | 109 | VX121BGC | 108 | WC20010 | 46 |
| VB112BGC | 107 | VGLC2 | 109 | VX211BGC | 108 | WC20020 | 46 |
| VB121BGC | 107 | VGLE1 | 109 | VX211CGC | 108 | WC20030 | 46 |
| VB210CGC | 107 | VGLH1 | 109 | VX221BGC | 108 | WC20040 | 46 |
| VB211BGC | 107 | VGLL1 | 109 | VX221CGC | 108 | WC20040L | 46 |
| VB221BGC | 107 | VGLR1 | 109 | VX911ALC | 108 | WL10MSA1 | 119 |
| VB221CGC | 107 | VGLW1 | 109 | VX911B | 109 | WL10MSG1 | 119 |
| VB911ALC | 107 | VGW1 | 109 | VX911BGC | 108 | WL10MSTG1 | 119 |
| VB911B | 109 | VGW2 | 109 | VX911BLA | 108 | WL10MSW1 | 119 |
| VB911BGC | 107 | VP111BGC | 107 | VX911BLC | 108 | WL10MDA1 | 119 |
| VB911BLA | 107 | VP121BGC | 107 | VX911BLE | 108 | WL10MDG1 | 119 |
| VB911BLC | 107 | VP211BGC | 107 | VX911BLL | 108 | WL10MDTG1 | 119 |
| VB911BLE | 107 | VP211CGC | 107 | VX911BLR | 108 | WL10MDW1 | 119 |
| VB911BLL | 107 | VP221BGC | 107 | VX911C | 109 | WL14STHG1 | 118 |
| VB911BLR | 107 | VP901B | 109 | VX911CGC | 108 | WL14STHTG1 | 118 |
| VB911C | 109 | VP910AHC | 107 | VX921ALC | 108 | WL14STHW1 | 118 |
| VB911CGC | 107 | VP910ALC | 107 | VX921B | 109 | WL14STVG1 | 118 |
| VB912B | 109 | VP911B | 109 | VX921BGC | 108 | WL14STVTG1 | 118 |
| VB921ALC | 107 | VP911BGC | 107 | VX921BLA | 108 | WL14STVW1 | 118 |
| VB921B | 109 | VP911BLA | 107 | VX921BLE | 108 | WL21MMDA1 | 119 |
| VB921BGC | 107 | VP911BLE | 107 | VX921BLL | 108 | WL21MMDG1 | 119 |
| VB921BLA | 107 | VP911BLL | 107 | VX921BLR | 108 | WL21MMDTG1 | 119 |
| VB921BLC | 107 | VP911BLR | 107 | VX921C | 109 | WL21MMDW1 | 119 |
| VB921BLE | 107 | VP911C | 109 | W10018M | 80 | WM10MSA1 | 95 |
| VB921BLL | 107 | VP911CGC | 107 | W10019M | 80 | WM10MSG1 | 95 |
| VB921BLR | 107 | VP920AHC | 107 | W10019N | 80 | WM10MSW1 | 95 |
| VB921C | 109 | VP920ALC | 107 | W10021M | 80 | WM10MDA1 | 95 |
| VB921CGC | 107 | VP920B | 109 | W10021N | 80 | WM10MDG1 | 95 |
| VC101BGC | 107 | VP921B | 109 | W10022M | 80 | WM10MDW1 | 95 |
| VC101CGC | 107 | VP921BGC | 107 | W10023M | 80 | WM21MMDA1 | 95 |
| VC201BGC | 107 | VP921BLA | 107 | W10023N | 80 | WM21MMDG1 | 95 |
| VC201CGC | 107 | VP921BLE | 107 | W5011M | 80 | WM21MMDW1 | 95 |
| VC900B | 109 | VP921BLL | 107 | W5012M | 80 | WMB1S2G3 | 96 |
| VC900BGC | 107 | VP921BLR | 107 | W5013M | 80 | WPB1S2G3 | 120 |
| VC900C | 109 | VP921C | 109 | W5015M | 80 | WPB1S2TG3 | 120 |
| VC900CGC | 107 | VP921CGC | 107 | W5017M | 80 | WPH1A1 | 97 |
| | | | | W7512M | 80 | WPH1AK1 | 97 |



INDEX

| Catalog Number | Page Number |
|----------------|-------------|
| WPH1B1 | 97 |
| WPH1G1 | 97 |
| WPH1GK1 | 97 |
| WPH1PG1 | 117 |
| WPH1PW1 | 117 |
| WPH1U0 | 97 |
| WPH1W1 | 97 |
| WPH1WK1 | 97 |
| WPH3A0 | 97 |
| WPH3B0 | 97 |
| WPH3G0 | 97 |
| WPH3W0 | 97 |
| WPH4A1 | 97 |
| WPH4G1 | 97 |
| WPH4W0 | 97 |
| WPH5A0 | 97 |
| WPH5B0 | 97 |
| WPH5G0 | 97 |
| WPH5W0 | 97 |
| WPL8A3 | 104 |
| WPL8G3 | 104 |
| WPL8W3 | 104 |
| WPL9A3 | 104 |
| WPL9G3 | 104 |
| WPL9W3 | 104 |
| WPMH1 | 110 |
| WTGN050 | 32 |
| WTGN075 | 32 |
| WTGN100 | 32 |
| WTGN125 | 32 |
| WTGN150 | 32 |
| WTGN200 | 32 |
| WTGN250 | 32 |
| WTGN300 | 32 |
| WTGN350 | 32 |
| WTGN400 | 32 |
| WTH050 | 31 |
| WTH050I | 31 |
| WTH075 | 31 |
| WTH075I | 31 |
| WTH100 | 31 |
| WTH100I | 31 |
| WTH125 | 31 |
| WTH125I | 31 |
| WTH150 | 31 |
| WTH150I | 31 |
| WTH200 | 31 |
| WTH200I | 31 |
| WTH250 | 31 |
| WTH250I | 31 |
| WTH300 | 31 |
| WTH300I | 31 |



120 Sigma Drive • Garner, NC 27529

919-773-0011

Visit us at www.sigmaengineeredsolutions.com