GFCI Receptacle Kit

INSTALLATION INSTRUCTIONS
For Rectangular Box, Cover and GFCI Receptacle Kit

PACKAGE CONTENTS :

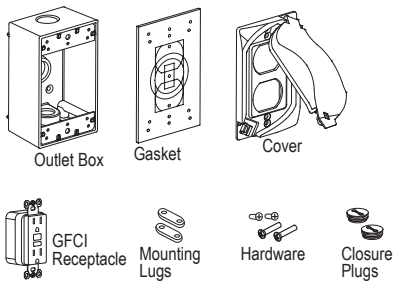



Fig 1.

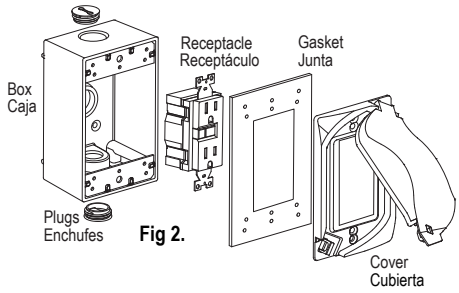

Fig 2.



BEFORE STARTING:
WARNING: Improper wiring of any electrical device can cause serious injury or death. These wiring devices should only be installed by a certified electrician or other qualified person.

CAUTION: This product should be installed in accordance with the National Electrical Code and all applicable local codes and standards.

TURN OFF POWER BEFORE INSTALLING.

Use only copper wire

INSTALL OUTLET BOX:
1) For wall mounting, fasten mounting lugs to box in desired orientation using provided screws (Fig. 1).
2) Pull power supply wires into box, securing with appropriate fitting.
3) Mount box to wall using 1” long screws (not included).
4) Close any remaining holes with enclosed plugs and use a silicone sealing compound for wet location installation.

INSTALL DEVICE and COVER:
1) Refer to included receptacle manufacturer’s instructions for receptacle wiring.
2) Ensure box is grounded using green ground screw.
3) Mount receptacle to outlet box using provided screws.
4) Remove tear-outs from gasket as required to fit GFCI device.
5) Using provided screws, mount gasket and cover to outlet box with hinge at the top (Fig. 2).

NOTE
Manufacturer’s instructions and wiring diagram supplied with Receptacle.
Please read completely before installation.

ANTES DE EMPEZAR:
ADVERTENCIA: El cableado incorrecto de cualquier dispositivo eléctrico puede causar lesiones graves o la muerte. Estos dispositivos de cableado solo deben ser instalados por un electricista certificado u otra persona calificada.

PRECAUCIÓN: Este producto debe instalarse de acuerdo con el Código Eléctrico Nacional y todos los códigos y normas locales aplicables.

APAGUE LA ENERGÍA ANTES DE INSTALAR.

Use solo alambre de cobre

INSTALAR CAJA DE SALIDA:
1) Para el montaje en la pared, sujete las orejetas de montaje a la caja en la orientación deseada utilizando los tornillos proporcionados (Fig. 1).
2) Tire de los cables de la fuente de alimentación en la caja, asegurándola con un accesorio apropiado.
3) Monte la caja a la pared con tornillos de 1 "de largo (no incluidos).
4) Cierre los orificios restantes con los tapones incluidos y utilice un compuesto de sellado de silicona para la instalación de ubicación húmeda.

INSTALAR DISPOSITIVO y CUBIERTA:
1) Consulte las instrucciones del fabricante del receptáculo incluido para el cableado del receptáculo.
2) Asegúrese de que la caja esté conectada a tierra con un tornillo de tierra verde.
3) Monte el receptáculo en la caja de salida usando los tornillos proporcionados.
4) Retire los desgarros de la junta según sea necesario para instalar el dispositivo GFCI.
5) Usando los tornillos provistos, monte la junta y la tapa en la caja de salida con la bisagra en la parte superior (Fig. 2).

NOTA
Las instrucciones del fabricante y el diagrama eléctrico suministran con Receptáculo.
Por favor, lea completamente antes de la instalación.